

REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		系列号变更, 图面升级整理图面	2024.11.24	阿树




Specification:
Volatage Rating:250V AC/DC
Current Rating :3A AC/DC
Withstaning Voltage:800V AC/Minute
Temperature Range:-40°~+125°
Insulation Resistance:≥1000MΩ
Contact Resistance:≤10MΩ

PART NO.:

X2000 I F-PSN1P-L
① ② ③ ④ ⑤ ⑥ ⑦

- ①Series Number.
②Category: T-terminal
③Welding Board Angle:F-Female Terminal
④Material:P-Phosphor Bronze
H-High Conductivity Copper
⑤Plating Code:SN:40~120u"(1~3um)Ni
80~200u"(2~5um)Tin
SN1:40~120u"(1~3um)Tin
⑥Plating Process:S-Stamping before Plating
P-Stamping after Plating
⑦Barrel type:H-High Feet; L-Low Feet

X2000TF-XXXX-X		Phosphor Bronze	X2000HM		X2000W
PART NO		Material	Suitable XKB Housing		Suitable XKB Wafer
X2000TF-PSN1P-H	AWG#22-20 (0.35~0.5mm ²)	ø1.6mm Max	1.80	1.70	X2000HM
X2000TF-PSN1P-L	AWG#24-22 (0.22~0.35mm ²)		1.70	1.60	
PART NO	Wire Range	Insulation O.D	DIM A	DIM B	Suitable XKB Housing

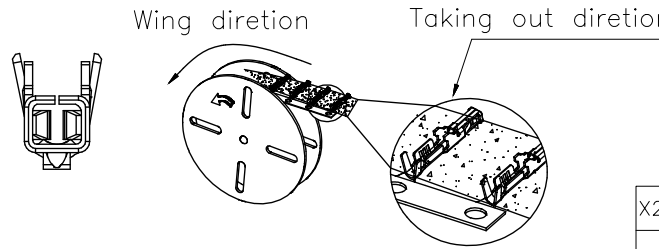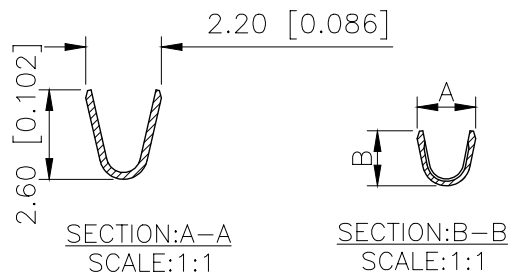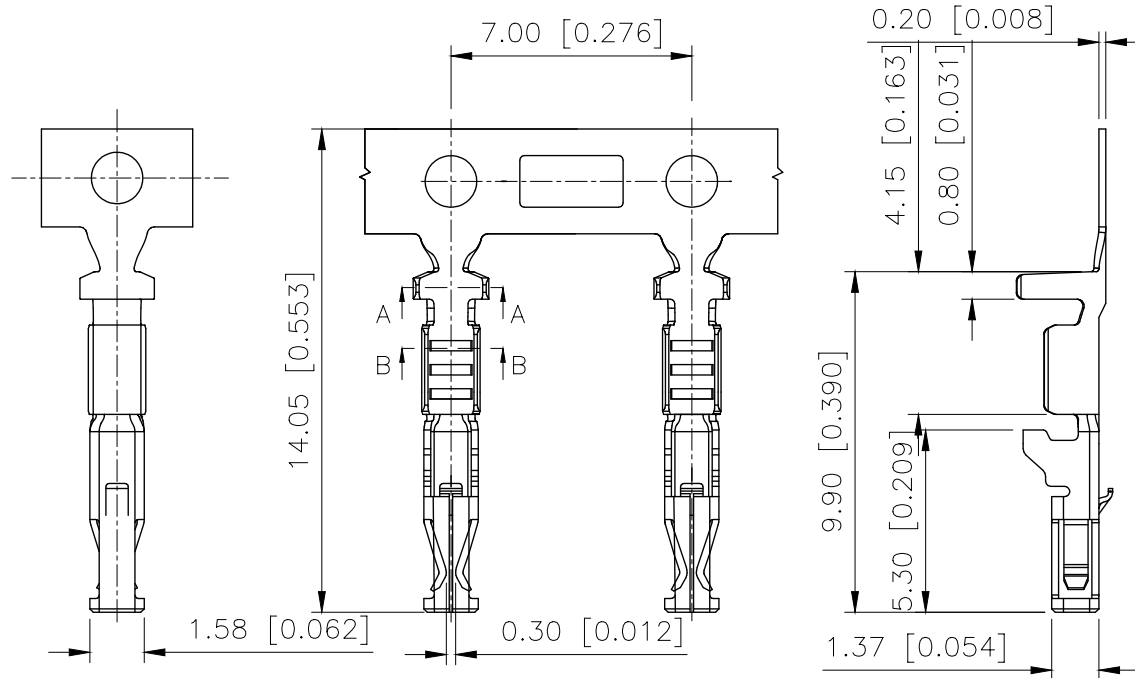

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERANCES	



DESIGN	阿树	VIEW:		MODEL TYPE: 2.0mm Automobile connector		
CHECKED		UNIT: mm/in		PART NO.: X2000TF-PSN1P-L		
APPROVED		SIZE: A4		DWG NO.: X-X2000TF-PSN1P-L		
PRECISION CO.,LIMITED				SCALE	PAGE	REVISION
				N/A	1/1	A1