


REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		图面升级整理图面	2025.12.23	阿树




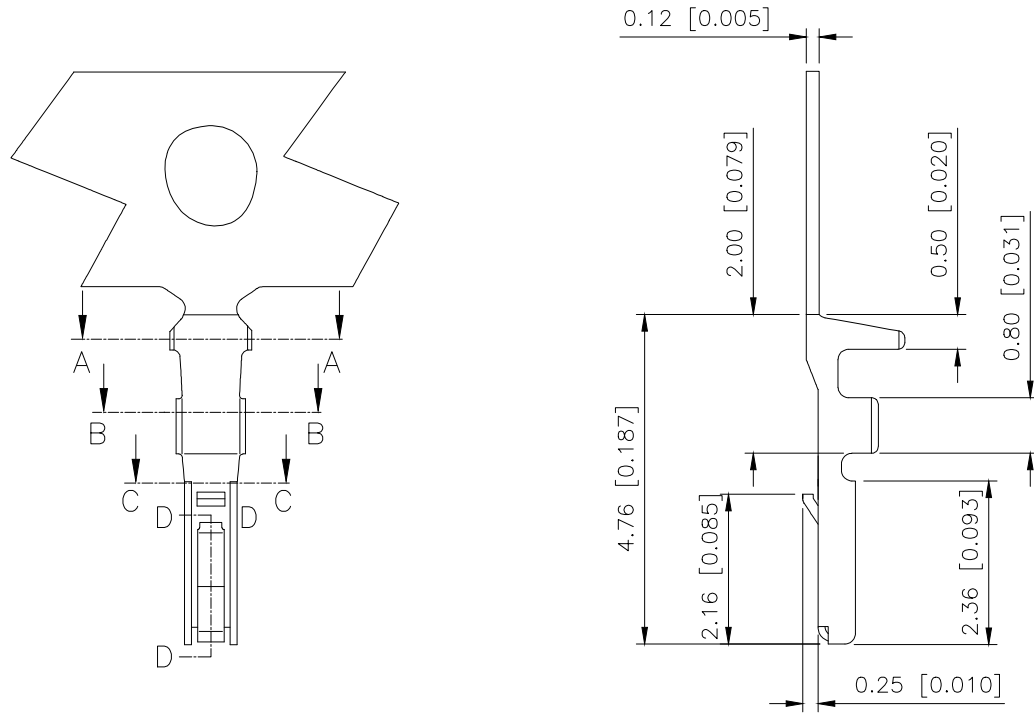


- SPECIFICATIONS
- Voltage rating:50V AC,DC
 - Current rating:1A,AC,DC
 - Withstanding Voltage:500V AC/minu
 - Temperature range:-45°C+95°C
 - Contact resistance:20mΩ max

PART NO.:

X1010 T-P SN
① ② ③ ④

- ①Series Number.
②Category: T-terminal
③Material:Phosphor bronze
④Plating Category: Tin -plating or Gold-plating
Plating V01:All Gold Flash



X1010T-PSN	Phosphor Bronze	AWG#28~32	X1010H
PART NO	Material	Wire Range	Suitable XKB Housing

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERANCES	



DESIGN	阿树	VIEW:		MODEL TYPE:	1.0mm Crimp Style Housing
CHECKED		UNIT:	mm/in	PART NO.:	X1010T-PSN
APPROVED		SIZE:	A4	DWG NO.:	