REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		独立各PIN数图纸，增加开孔定位尺寸	2024.12.12	阿树

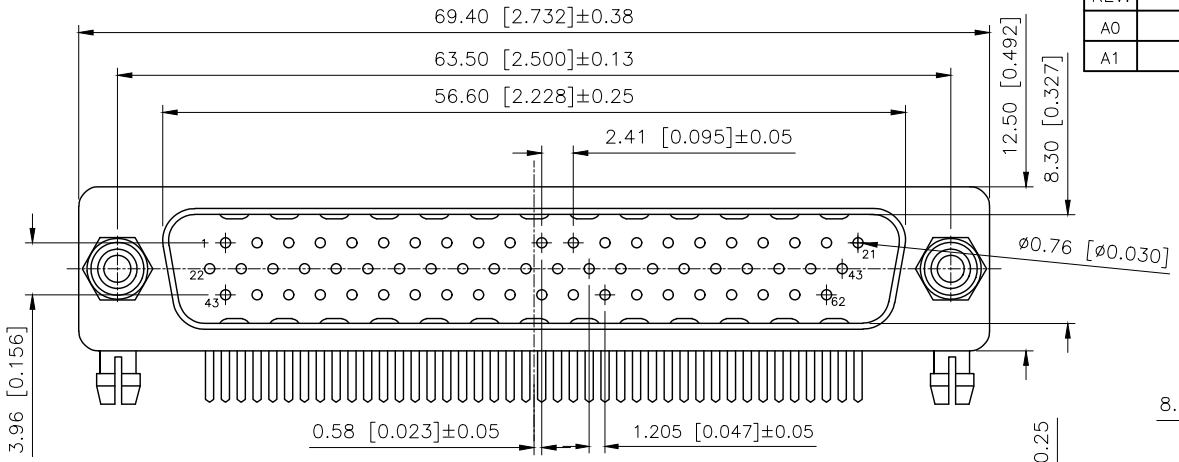

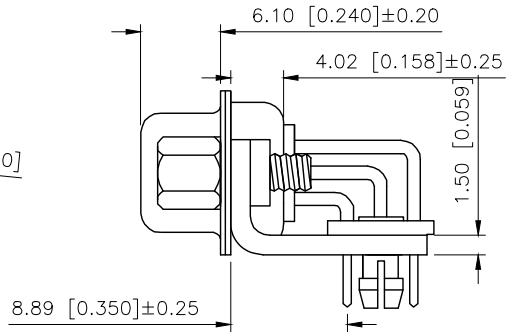

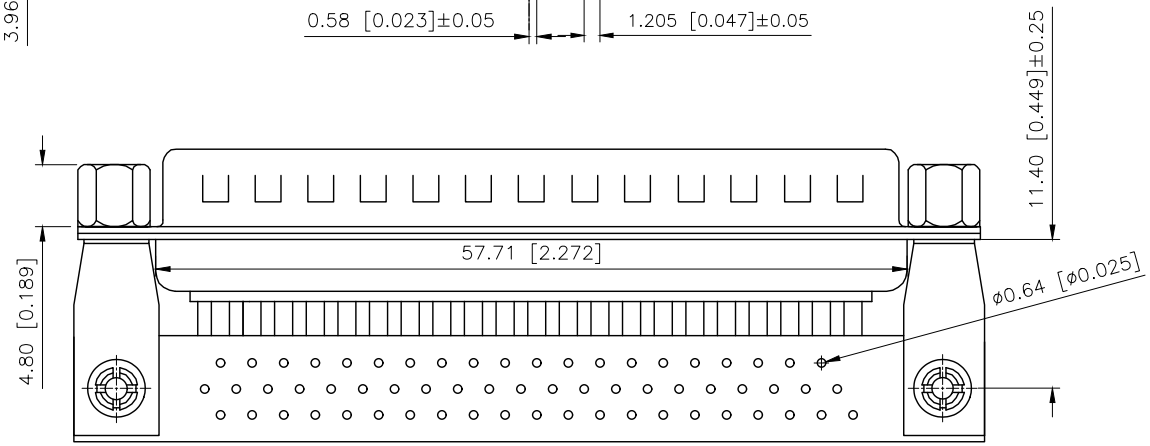

Specifications:
规格：
Current rating:5A AC/DC
额定电流：5A AC/DC
Voltage rating:500V AC
额定电压：500V AC
Withstanding voltage:1000V AC/MIN
耐受电压：≥1000V AC/分钟
Temperature range:−55℃−+105℃
温度范围：−55℃−+105℃
Insulation resistance:1000MΩMIN
绝缘电阻：≥1000MΩ
Contact resistance:30mΩMAN
接触电阻:≤30mΩ
Materiai And FINISHED:
材料和成本:
INSULATOR:PBT+30% GLASS FILLED UL 94V−0
绝缘体：PBT+30% 玻璃填充 UL 94V−0
SHELL: Steel Plated Ni
外壳：钢 镀锡
CONTACT MATERIAL:Brass
触点材料：黄铜

PART NO.:

X06 15 W C 2 B 2
① ② ③ ④ ⑤ ⑥ ⑦

①Series NO.
②Row No.Pin No:15PIN
③Welding Board Angle :W−Male
④C：Car−pin
⑤Planting Categotry:
1:1U’;2:2U’;3:3U’;4:5U’;5:15U’ 6:30U’;7:AuSn
⑥B:Black W:White BL:Blue Y:Yellow G:Green R:Red
⑦1:TYPE−1; 2:TYPE−2;

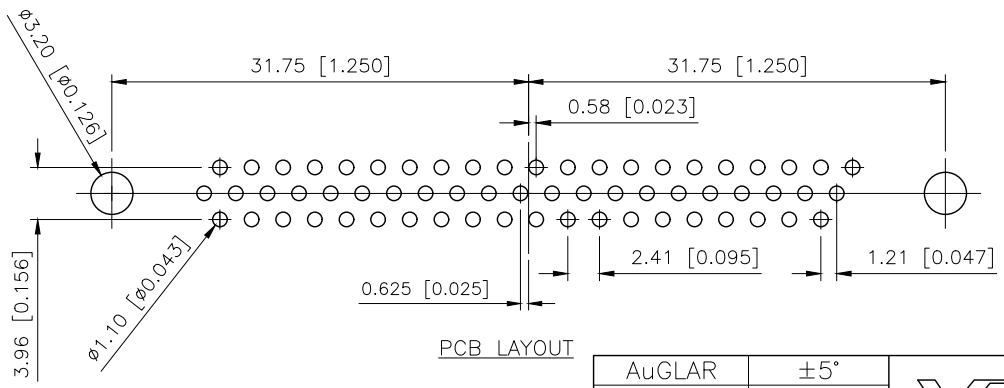

PCB LAYOUT

铆合方式	TYPE-1:铆合	TYPE-2:铆合锁螺丝
图式		

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERAuCES	

XKB Connection

DESIGN	阿树	VIEW:	MODEL TYPE: D-SUB
CHECKED		UNIT: mm/in	PART NO.: X0662WC2B2
APPROVED		SIZE: A4	DWG NO.: X−X0662WC2B2

XKB INDUSTRIAL PRECISION CO.,LIMITED

SCALE	PAGE	REVISION
N/A	1/1	A1