

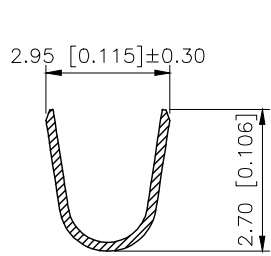
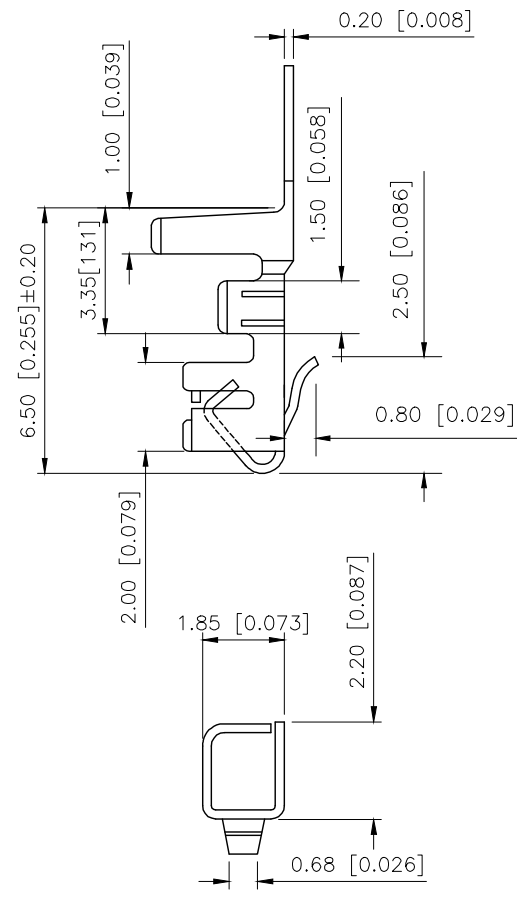


REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	2025.12.19	
/	N/A		/	/	/

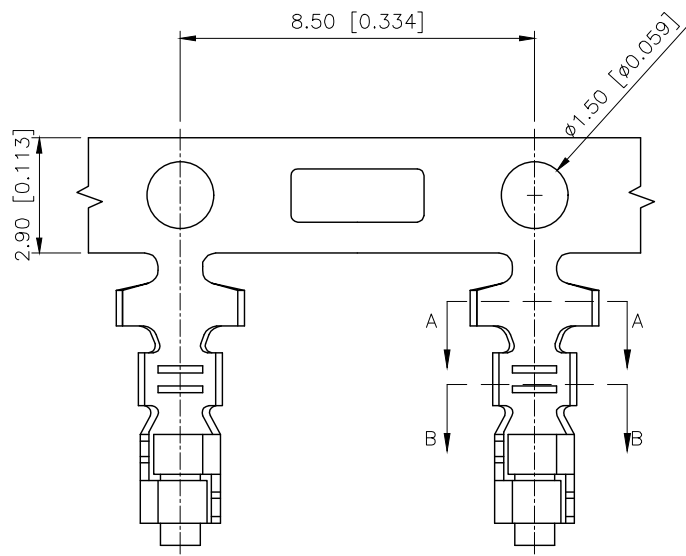

SECTION:A-A
SCALE:1:1

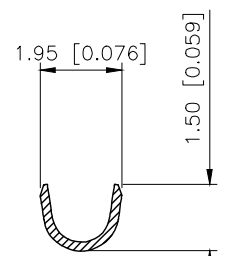

SECTION:B-B
SCALE:1:1

Specifications:


Voltage rating:250V AC/DC
250V AC/DC
Current rating:3A AC/DC
3A AC/DC
Withstanding voltage:1000V AC/minute
1000V AC/
Temperature range:-25 +85
-25 +85
Insulation resistance:1000MΩ min
1000MΩ Min
Contact resistance:20mΩ Max
20mΩ Max

PART NO.:

X8821 I F P-SN

Series No

Category:T-Terminal
Shape:F-Female Terminal
Material:P-Phosphor Bronze
Plating:SN-Tin Plated

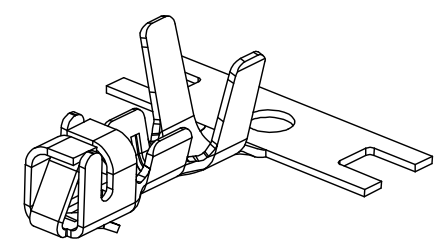

X8821TF-PSN	Phosphor Bronze	AWG#22~28	X8821H
PART NO	Material	Wire Range	Suitable XKB Housing

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERANCES	



DESIGN	
CHECKED	
APPROVED	

VIEW: 
UNIT: mm/in
SIZE: A4

MODEL TYPE: 2.50 mm Crimp Style Connector
PART NO.: X8821TF-PSN
DWG NO.: