

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

20







© COPYRIGHT 20

BY -

ALL RIGHTS RESERVED.

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	B	INITIAL	19SEP2017	YC	CW

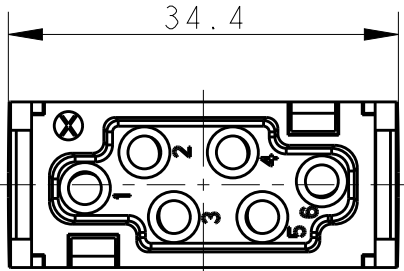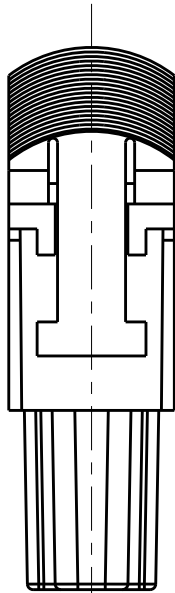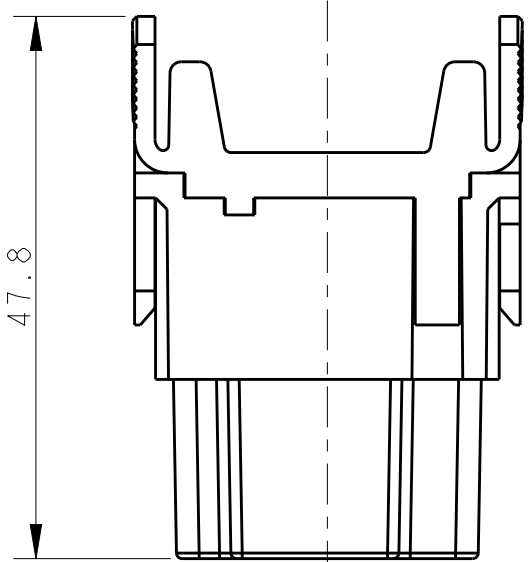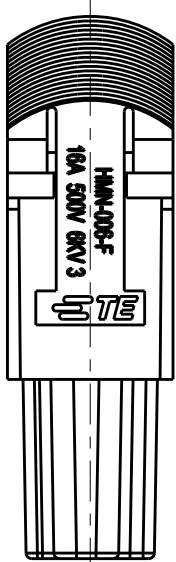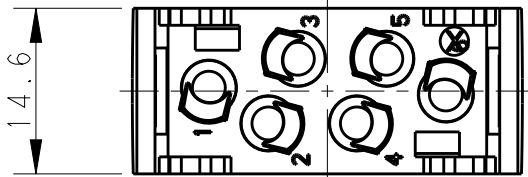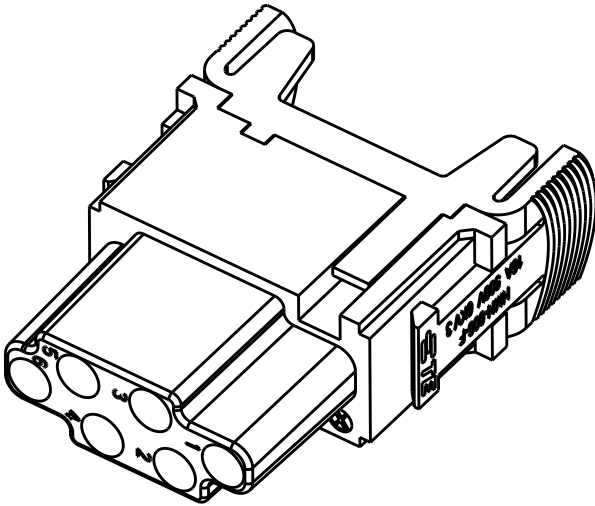


NOTES:

1. TECHNICAL CHARACTERISTICS:
INSULATION MATERIAL: PC
RATED VOLTAGE: 500V
RATED CURRENT: 16A
INSULATION RESISTANCE: $\geq 400M\Omega$
RATED IMPULSE VOLTAGE: 6KV
POLLUTION DEGREE: 3
FLAMMABILITY: UL94V-0
MATING CYCLES: 500 CYCLES
WIRE RANGE: 0.14~4 mm² (26~12 AWG)
CONTACT TYPE: CRIMP CONTACT
2. CONTACT NEED TO BE ORDERED SEPARATELY.
(ORDER No. REFER TO DRAWING:T20300X20XX000)

注释:

1. 技术参数:
绝缘材料: PC
额定电压: 500V
额定电流: 16A
绝缘电阻: $\geq 400M\Omega$
额定脉冲电压: 6KV
污染等级: 3
阻燃等级: UL94V-0
插拔次数: 500次
接线范围: 0.14~4 mm² (26~12 AWG)
接线类型: 冷压接
2. 端子需要单独订购.
(订货号参考图面: T20300X20XX000)

T2111062201-007	HMN-006-F	HMN-006 FEMALE MODULE INSERT HMN-006 模块母插			
PART NUMBER 料号		PART DESCRIPTION 描述			
DWN	19SEP2017	 TE Connectivity			
CHK	19SEP2017				
APVD	19SEP2017				
PRODUCT SPEC	108-137120				
APPLICATION SPEC	114-137120	NAME		HMN-006-F	
WEIGHT	-	SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
Customer Drawing		A3	00779	©-T2111062201007	-
		SCALE		SHEET	REV
		3:2		1 OF 1	B

THIS DRAWING IS A CONTROLLED DOCUMENT.	
DIMENSIONS: mm	TOLERANCES UNLESS OTHERWISE SPECIFIED:
	0 PLC ± 1 PLC ± 2 PLC ± 3 PLC ± 4 PLC ± ANGLES ±
MATERIAL	FINISH
-	-
-	-

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[T2111062201-007](#)