

Pitch:2.54x2.54mm(0.1 " x0.1 ")
Female Header Dual Rows Dip Type

ELETE
Professional Connecting Solution
HFNDTXX Series


Specifications

Current Rating:3.0 Ampere
Insulation Resistance:1000MΩ Min
Dielectric Withstanding:600V AC
Contact Resistance:20mΩ Max
Operating Temperature:-40℃ to +105℃

Materials

Contact Material: Phosphor Bronze
Insulation Material: Polyester,UL 94V-0
LCP/NL6T

All material RoHS&Reach Compliant
Halogen-free is available

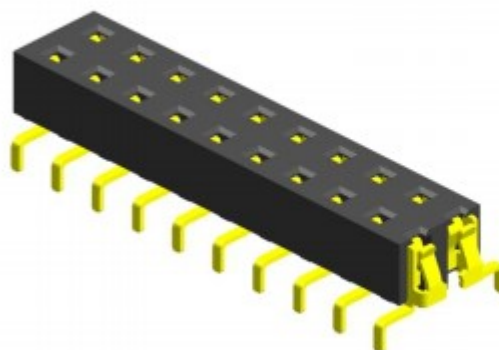

Mating with



HMNDSH25




HMNDS25




HMNDS43



HMNDS74




HMNDM43



HMNDM25





HMNDP61/HMNDP50



HMNDR43



HMNDR25

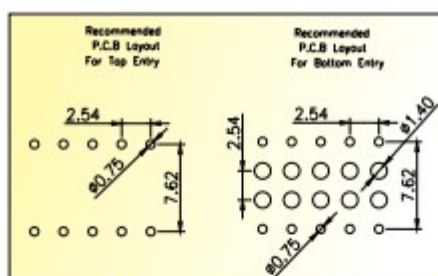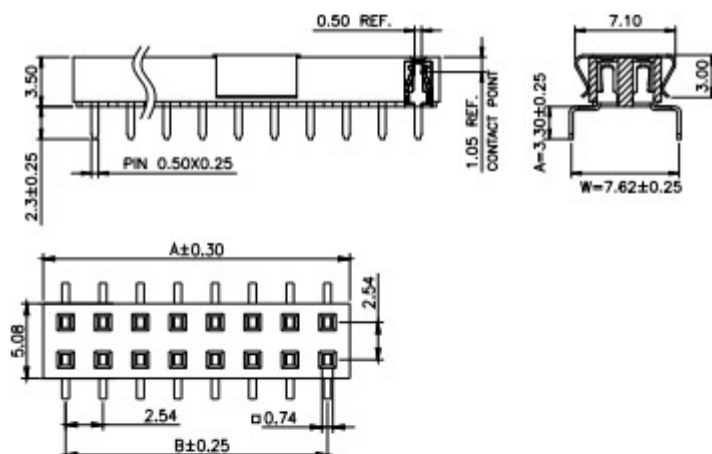

PS:Suggested Mating Pin Length:2.5~3.0mm H=3.5 3.0~4.5 H=5.0 3.0~6.5 H=7.0

No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information	
	A	B		A	B		A	B		A	B
02	5.58	2.54	12	30.98	27.94	22	56.38	53.34	32	81.78	78.74
03	8.12	5.08	13	33.52	30.48	23	58.92	55.88	33	84.32	81.28
04	10.66	7.62	14	36.06	33.02	24	61.46	58.42	34	86.86	83.82
05	13.20	10.16	15	38.60	35.56	25	64.00	60.96	35	89.40	86.36
06	15.74	12.70	16	41.14	38.10	26	66.54	63.50	36	91.94	88.90
07	18.28	15.24	17	43.68	40.64	27	69.08	66.04	37	94.48	91.44
08	20.82	17.78	18	46.22	43.18	28	71.62	68.58	38	97.02	93.98
09	23.36	20.32	19	48.76	45.72	29	74.16	71.12	39	99.56	96.52
10	25.90	22.86	20	51.30	48.26	30	76.70	73.66	40	102.10	99.06
11	28.44	25.40	21	53.84	50.80	31	79.24	76.20			