

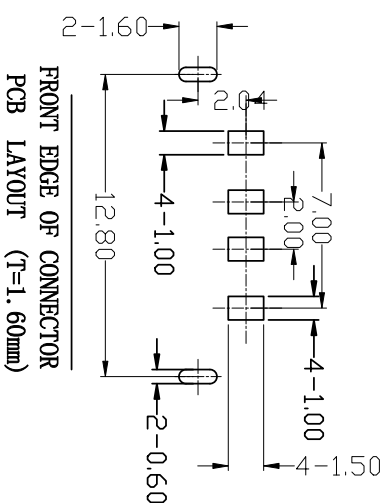
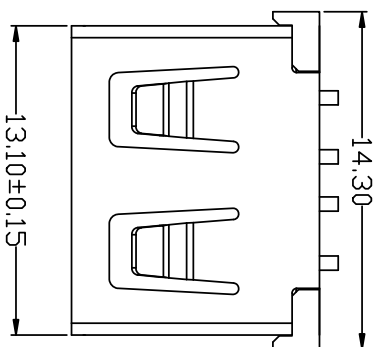
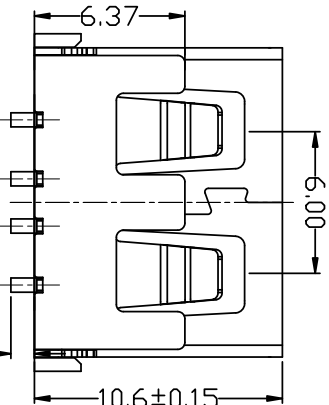


12345678910

RoHS

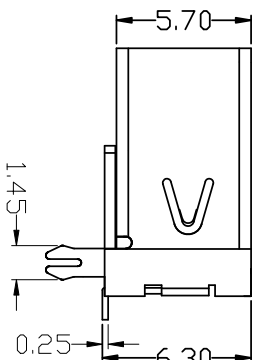

FRONT EDGE OF CONNECTOR
PCB LAYOUT (T=1.60mm)

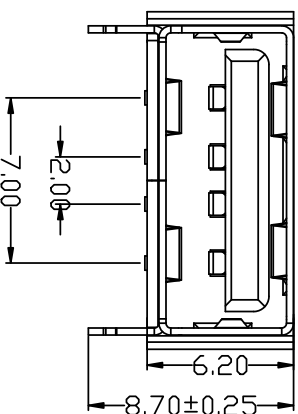

产品图

公差一览表

Pin NUMBER	SIGNAL NAME
1	VBUS
2	D-
3	D+
4	GND

公差一览表

TOLERANCE UNLESS OTHERWISE	公差
X ±0.35	X' ±5°
X ±0.30	X' ±2°
.XX ±0.25	.XX' ±1°
.XXX ±0.10	.XXX' ±0.5°

深圳市精拓金电子有限公司

单位	MM	制图	L S S	产品料号
比例	1:1	审核	G Z F	产品名称
日期	2021/09/10	核准	黄国荣	角法
DATE	2021/09/10	APRD	VER	版本
				A0

电气特性:Electrical:

1. 额定电流: Current Rating

1.5A/contact terminal

2. 额定电压: Voltage Rating

30V DC

3. 接触阻抗:Contact Resistance

30 milliohms MAX

4. 耐电压:Dielectric Withstanding Voltage:

500 V AC AT Sea Level

5. 绝缘阻抗:Insulation Resistance:

1000MEGA ohms MIN

物理性能:Mechanical:

1. 插拔力: Cnnector Mate and Umate Force

Mate force:3.57kgf (MAX)

Umate force:1.02kgf (MIN)

2. 端子保持力: Terminal Retention

1.0kgf (MIN)

3. 寿命: 1500次

原材料:Material:

1. 塑胶:Housing:1cp

2. 端子:Contact:Copper Alloy C2680

3. 外壳:Shell:SPCC/c2680

电镀:Finish:

1. 端子Contact: Au G/F u" Plated on contact area

Tin50u" Plated on solder area

Nickel 50u" Plated underplating over all.

2. 外壳Shell: Nickel 50u" Min plating over all.