
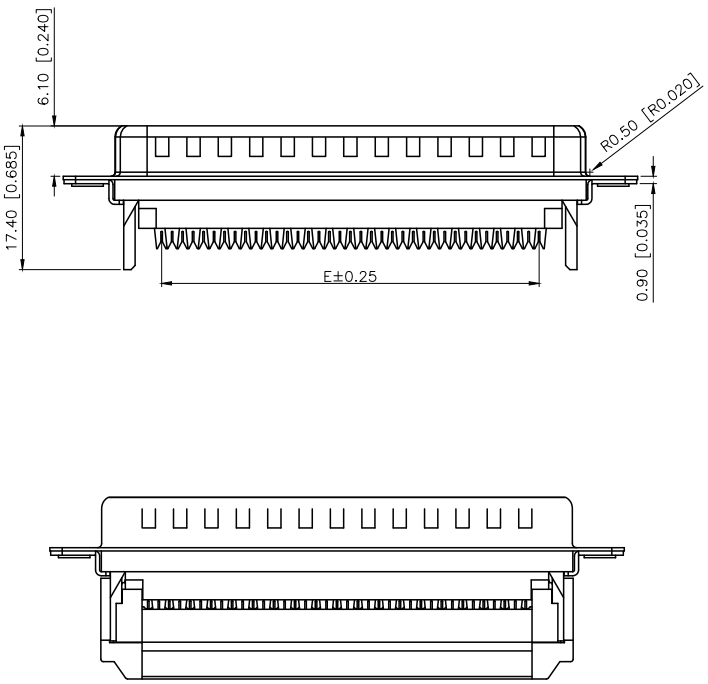


| REVISIONS |         |          |                   |            |
|-----------|---------|----------|-------------------|------------|
| REV.      | ECN NO. | LOCATION | DESCRIPTION       | DATE       |
| A1        | N/A     |          | pin数表更新，图片面升级整理图面 | 2024.08.06 |
| A2        | N/A     |          | 图框升级              | 2025.12.29 |

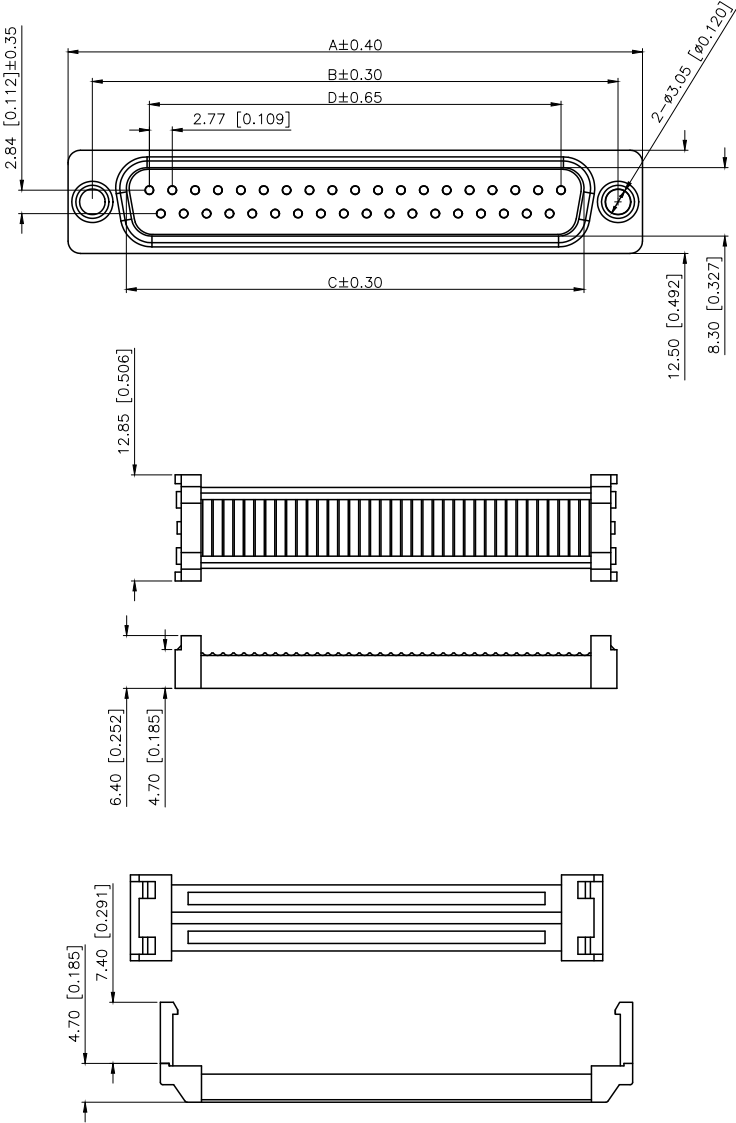

Specifications:  
规格:  
1.Voltage rating:250VAC/DC  
额定电压: 250V AC/DC  
2.Current rating:1A AC/DC  
额定电流: 1A AC/DC  
3.Withstanding voltage:500V AC/minute  
耐受电压: ≥500V AC/分钟  
4.Temperature range:-40℃+105℃  
温度范围: -40℃+105℃  
5.Insulation resistance:1000MΩMIN  
绝缘电阻: ≥1000MΩ  
6.Contact resistance:20mΩMax  
接触电阻: ≥20mΩ  
Material:  
材料:  
7.Rubber core:PBT UL94V-0  
胶芯: PBT UL94V-0  
8.The iron shell:SPCC Nivkel Plating/Tin Plating  
铁壳: SPCC,镀镍/镀锡  
B、成品不能有弯针, R角不一致等不良。

PART NO.:  
X08 15 W T 7 BL 1  
① ② ③ ④ ⑤ ⑥ ⑦  
① Series NO.  
② Row No.Pin No.XX-09;15;25;37  
③ Welding Board Angle :W-Male  
④ T: Tradutonal C: Car-pin  
⑤ Planting Categoty: 1:1U; 2:2U; 3:3U; 4:4U;  
5:5U; 6:6U 7:AuSn  
⑥ Color:B-BLACK;W-White;BL-Blue  
⑦ 1:TYPE-1; 2:TYPE-2; 3:TYPE-3; 4:TYPE-4; 5:TYPE-5

| NUMBER OF POSITIONS | DIMENSION |        |        |        |        |
|---------------------|-----------|--------|--------|--------|--------|
|                     | A±0.40    | B±0.30 | C±0.30 | D±0.65 | E±0.25 |
| 9                   | 30.80     | 25.00  | 16.95  | 11.08  | 10.16  |
| 15                  | 39.14     | 33.30  | 25.30  | 19.39  | 17.78  |
| 25                  | 53.05     | 47.04  | 38.96  | 33.24  | 30.38  |
| 37                  | 69.32     | 63.50  | 55.42  | 49.86  | 45.72  |

|             |  |                        |  |          |  |
|-------------|--|------------------------|--|----------|--|
| X0815WT7BL1 |  | XDBLS                  |  | XDBLM    |  |
| PART NO     |  | SCREW                  |  | NUT      |  |
| VIEW:       |  | MODEL TYPE: D-USB      |  |          |  |
| UNIT: mm/in |  | PART NO.: X0815WT7BL1  |  |          |  |
| SIZE: A4    |  | DWG NO.: X-X0815WT7BL1 |  |          |  |
|             |  | SCALE                  |  | PAGE     |  |
|             |  | N/A                    |  | 1/1      |  |
|             |  |                        |  | REVISION |  |
|             |  |                        |  | A2       |  |

|                        |       |
|------------------------|-------|
| AuGLAR                 | ±5°   |
| X.                     | ±0.40 |
| X.x                    | ±0.30 |
| X.xx                   | ±0.20 |
| X.xxx                  | ±0.15 |
| UNSPECIFIED TOLERAUCES |       |



|          |    |
|----------|----|
| DESIGN   | 阿树 |
| CHECKED  |    |
| APPROVED |    |

|             |                        |
|-------------|------------------------|
| VIEW:       | MODEL TYPE: D-USB      |
| UNIT: mm/in | PART NO.: X0815WT7BL1  |
| SIZE: A4    | DWG NO.: X-X0815WT7BL1 |