

High Frequency Ceramic Solutions

500 MHz Low Pass Filter

Detail Specification: 01/03/2012

P/N 0500LP15A500

Page 1 of 2


General Specifications

Part Number	0500LP15A500
Frequency (MHz)	0 - 500
Insertion Loss	0.7 dB max.
Return Loss	9.5 dB min.
Attenuation (min.)	9 dB @ 824 - 960 Mhz
Attenuation (min.)	25 dB @ 1.71 - 1.99 Ghz
Attenuation (min.)	25 dB @ 2.40 - 4.00 Ghz

Impedance	50 Ω
Operating Temperature	-40 to +85°C
Storage Temperature	+5 ~ +35°C, Humidity: 45~75%RH, 18 mos. Max
Reel Quantity	4000
Input Power	2 Watt max.


Mechanical Dimensions

	In	mm
L	0.079 $\pm$ 0.004	2.00 $\pm$ 0.10
W	0.049 $\pm$ 0.004	1.25 $\pm$ 0.10
T	0.037 $\pm$ 0.004	0.95 $\pm$ 0.10
a	0.012 $\pm$ 0.004	0.30 $\pm$ 0.10
b	0.008 $\pm$ 0.004	0.20 $\pm$ 0.10
c	0.012 $\pm$ 0.004/-0.008	0.30 $\pm$ 0.1/-0.2
g	0.014 $\pm$ 0.004	0.35 $\pm$ 0.10
p	0.026 $\pm$ 0.002	0.65 $\pm$ 0.05

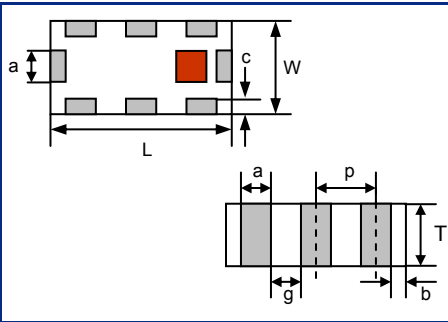

Terminal Configuration

No.	Function
1	GND
2	NC
3	GND
4	OUT
5	GND
6	NC
7	GND
8	IN




Mounting Considerations

Mount these devices with red mark facing up.

* Line width should be designed to provide 50 ohm impedance, depending on PCB material and thickness

Units: mm

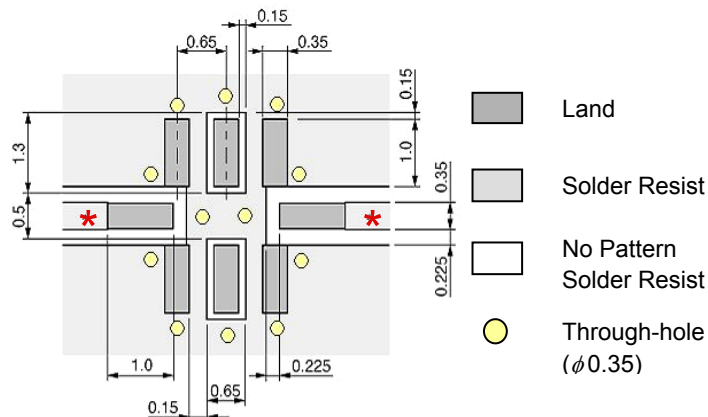

Johanson Technology, Inc. reserves the right to make design changes without notice.

All sales are subject to Johanson Technology, Inc. terms and conditions.



www.johansontechnology.com

4001 Calle Tecate • Camarillo, CA 93012 • TEL 805.389.1166 FAX 805.389.1821

2012 Johanson Technology, Inc. All Rights Reserved

High Frequency Ceramic Solutions


500 MHz Low Pass Filter

Detail Specification: 01/03/2012

P/N 0500LP15A500

Page 2 of 2

Typical Electrical Performance (T=25°C)

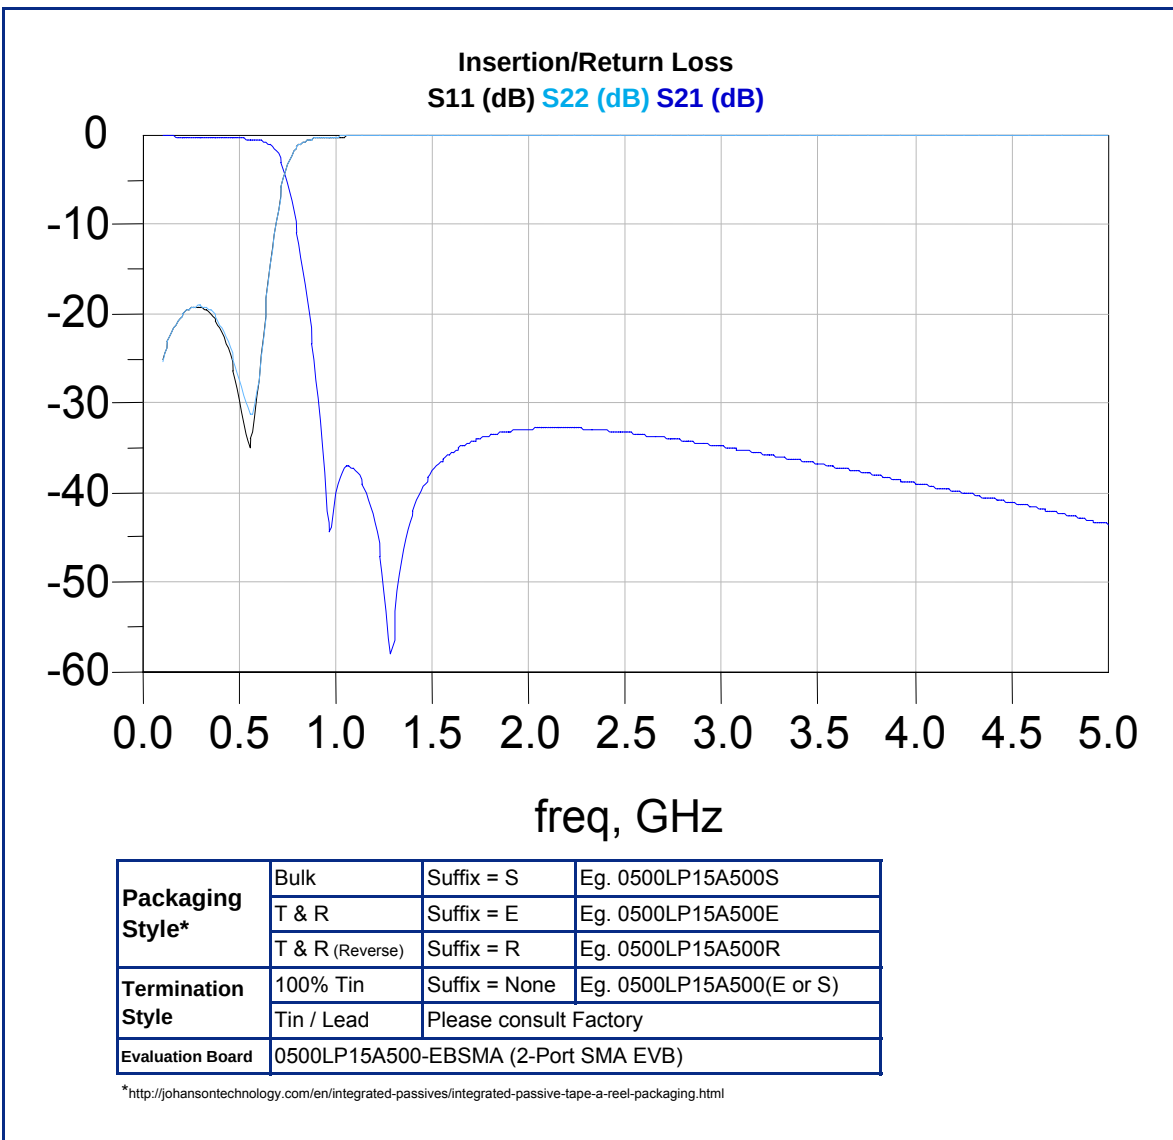

Johanson Technology, Inc. reserves the right to make design changes without notice.
All sales are subject to Johanson Technology, Inc. terms and conditions.



www.johansontechnology.com

4001 Calle Tecate • Camarillo, CA 93012 • TEL 805.389.1166 FAX 805.389.1821

2012 Johanson Technology, Inc. All Rights Reserved