
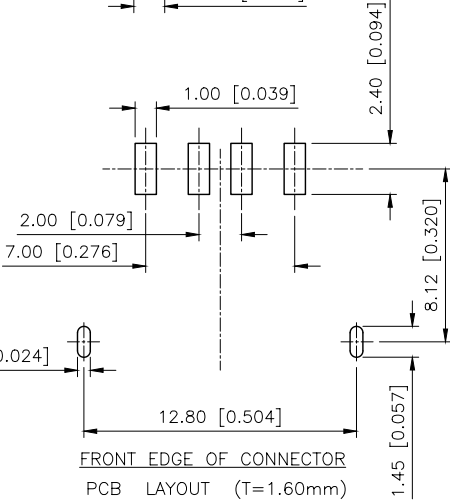
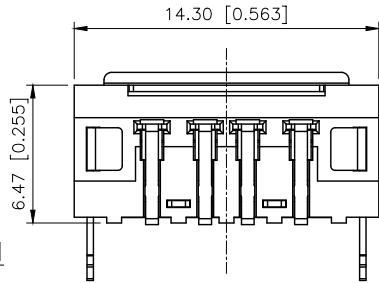
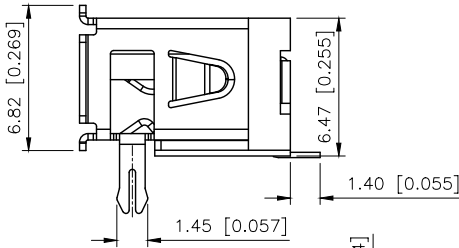


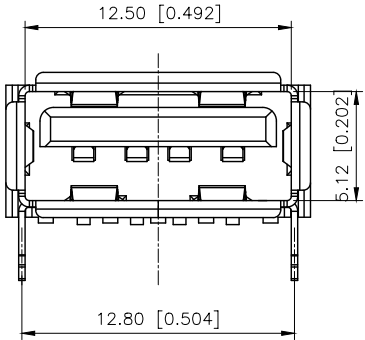


REV. ECN NO. LOCATION DESCRIPTION DATE DESIGN					
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		图面升级整理图面	2025.05.06	阿树

- NOTES:
- 1.材料规格 MATERIAL SPECIFICATION:
- (1) 胶壳 HOUSING MATERIAL:BLACK LCP ROHS;
- (2) 外壳 SHELL MATERIAL:C2680 T=0.30
- 电镀 PLATING:NICKE;
- (3) 端子 TERMINAL: C5191 T=0.25
- 电镀 PLATING:SEMI GOLD TIN G/F;
- 2.电气特性 ELECTRICAL CHARACTERISTIC:
- (1) 绝缘电阻 INSULATION RESISTANCE: 1000MΩ MIN;
- (2) 接触电阻 CONTACT RESISTANCE: 30mΩ MAX;
- (3) 耐压 WITHSTANDING VOLTAGE: 500V AC;
- 3.机器特性 MECHANICAL CHARACTERISTICS:
- (1) 插入力 INSERTION FORCE:3.57Kgf Max;
- (2) 拔出力 EXTRACTION FORCE:1.02Kgf Min;

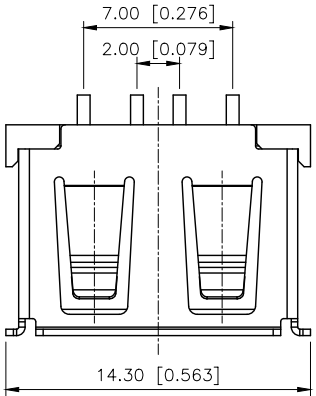

U221-041N-4BVS65-S5D

1:Au 1U"
6:Au 30U"

1:PBT
2:PA6T
3:PA9T
4:LCP

W:WHITE
B:BLACK

1:SPCC
5:BRASS
S:Scrolls
F:Flat

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERAUCES	



DESIGN	阿树	VIEW:	
CHECKED		UNIT:	mm/in
APPROVED		SIZE:	A4

MODEL TYPE: USB 2.0		
PART NO.: U221-041N-4BVS65-S5D		
DWG NO.: X-U221-041N-4BVS65-S5D		
SCALE N/A	PAGE 1/1	REVISION A1