

Pitch:2.00mm(0.079 ")

Female Header Double Row S.M.T Right Angle Type

ELETE
—Professional Connecting Solution—
HFLDP63-Series

Specifications

Current Rating:2.0 Ampere

Insulation Resistance:1000M Ω Min

Dielectric Withstanding:500V AC

Contact Resistance:20m Ω Max

Operating Temperature:-40℃ to +105℃




Materials

Contact Material: Phosphor Bronze


Insulation Material: Polyester,UL 94V-0
LCP/NL6T

All material RoHS&Reach Compliant

Halogen-free is available

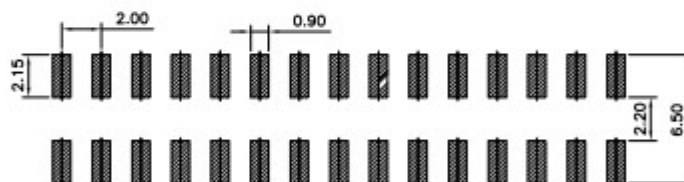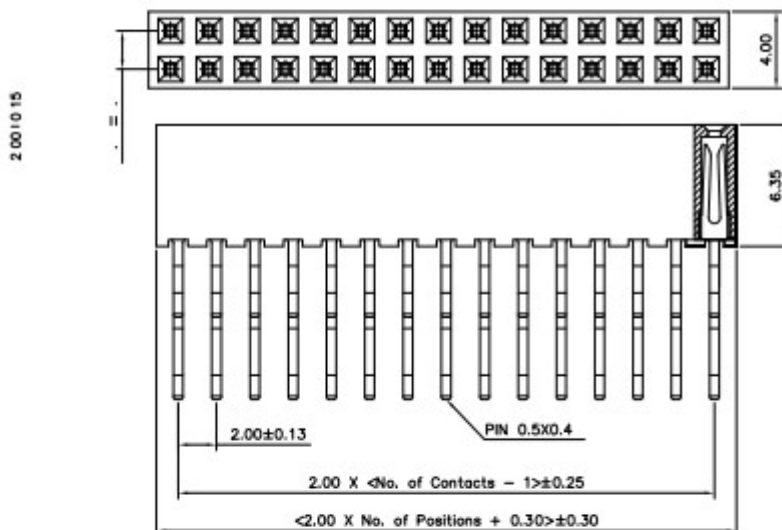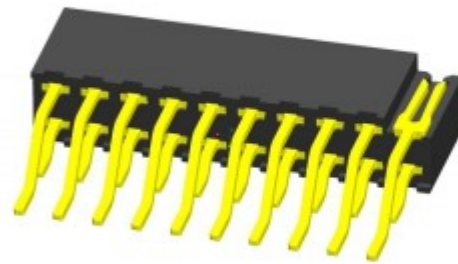

TOLERANCE: ± 0.05
RECOMMENDED PCB LAYOUT
(TOP VIEW)

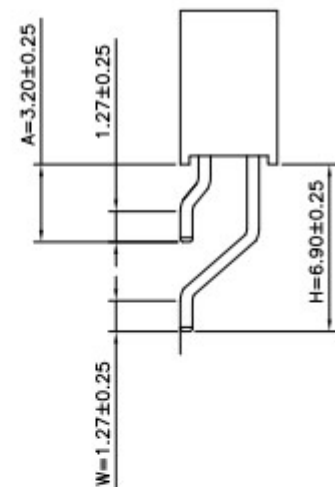

0.12MAX