



REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A1	N/A		料号说明pin数修改	2024.07.27	阿树
A2	N/A		独立各PIN数图纸, 增加开孔定位尺寸	2024.12.10	阿树

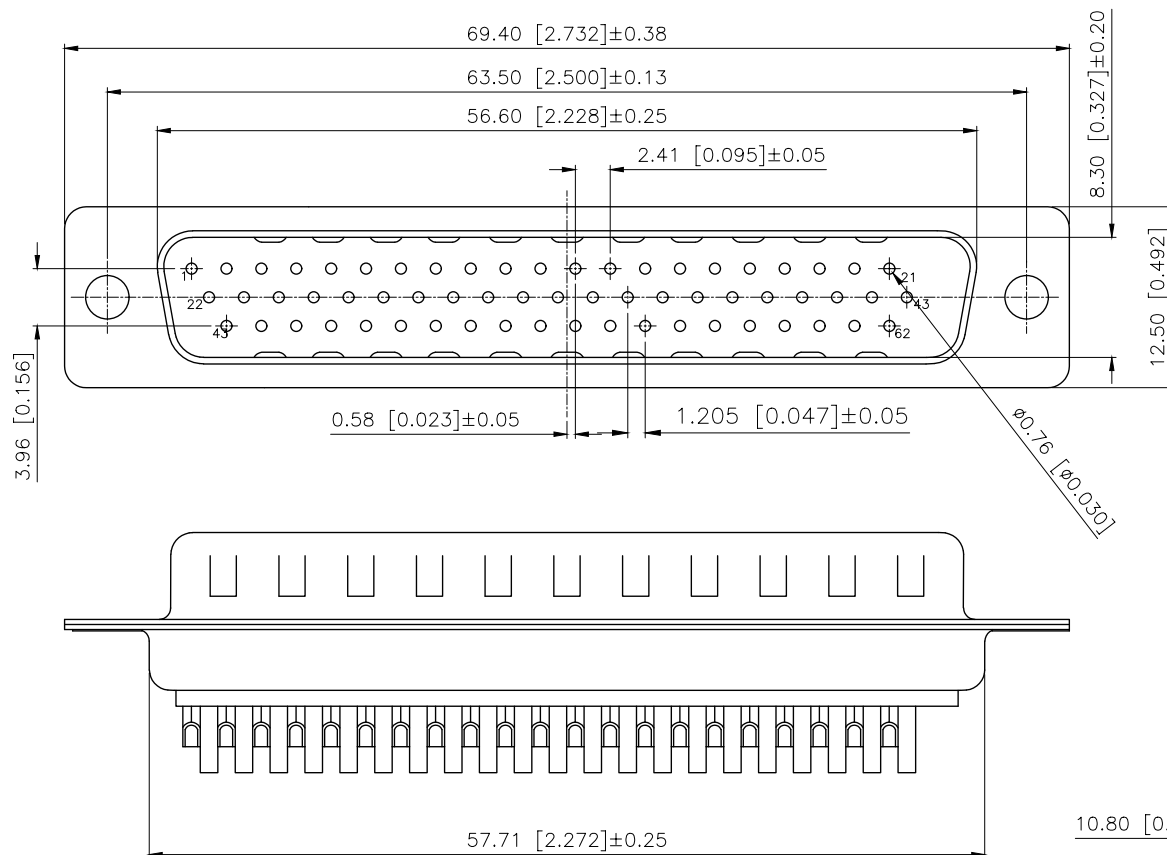

Specifications:

- Voltage rating: 250V AC/DC
额定电压: 250V AC/DC
- Current rating: 3A AC/DC
额定电流: 3A AC/DC
- Withstanding voltage: 500V AC/minute
耐受电压: 500V AC/分钟
- Temperature range: -55°C ~ +105 °C
温度范围: -55°C ~ +105 °C
- Insulation resistance: $\geq 1000M\Omega$
绝缘电阻: $\geq 1000M\Omega$
- Contact resistance: $\leq 30m\Omega$
接触电阻: $\leq 30m\Omega$
- Rubber core: PBT UL94V-0
胶芯: PBT UL94V-0
- The iron shell: SPCC-SD Nivkel Plating/Tin Plating/Gold Plating
铁壳: SPCC-SD, 镀镍/镀锡/镀金
- Terminal: Copper alloy
端子: 铜合金

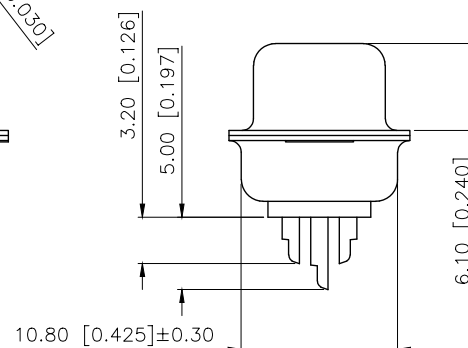

PART NO.:

X04 62 W T Z B 1
① ② ③ ④ ⑤ ⑥ ⑦

- ① Series No
② Row No-Pin No: 62Pin
③ Welding Board Angle: W-Male
④ T: Tradutional C: Car-pin
⑤ Planting Catogtry:
1: 1u 2: 2u 3: 3u 4: 5u 5: 15u 6: 30u 7: AuSn
⑥ Color: B-Black W-White BL-Blue
⑦ 1: TYPE-1; 2: TYPE-2; 3: TYPE-3; 4: TYPE-4

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERANCE	



DESIGN	阿树	VIEW:		MODEL TYPE:	D-SUB	
CHECKED		UNIT: mm/in		PART NO.:	X0462WT7B1	
APPROVED		SIZE: A4		DWG NO.:	X-X0462WT7B1	
PRECISION CO.,LIMITED				SCALE	PAGE	REVISION
				N/A	1/1	A2