

18×11 MATRIX LED DRIVER

FEATURES

- 18 current sinks, 11 current switches, up to drive 198 LEDs or 66 RGBs.
- Programmable matrix size
- 40mA maximum current output per CS channel
- Individual 256-level PWM for dimming
- High-precision current sinks
 - Device-to-device error: $\pm 7\%$
 - Channel-to-channel error: $\pm 7\%$
- EMI and audible noise reduction
 - Spread spectrum function
 - Programmable slew rate control
- Programmable H/L logic
 - 1.4V/0.4V
 - 2.4V/0.6V
- Individual 198 LEDs open/short detection
- Multiple-device clock synchronization by SYNC pin
- De-Ghost
- 1MHz I²C interface, 16 selectable addresses
- Power supply: 2.7V~5.5V
- QFN 5mmx5mmx0.55mm-40L package

APPLICATIONS

Smart speaker, Bluetooth speaker
Gaming device (Keyboard, Mouse etc.)
Mobile phone, PAD

GENERAL DESCRIPTION

AW20198C is an 18x11 matrix LED driver programmed via an I²C compatible interface. Each channel has individual 8-bit PWM current setting for brightness control. The global current of each channel is determined by the external resistor R_{EXT}. Spread spectrum and slew rate control technology are utilized to reduce EMI and audible noise caused by MLCC when LEDs turn on or off simultaneously. AW20198C can be turned off with minimum current consumption by either pulling the EN pin low or using the software reset.

AW20198C is available in QFN 5mmx5mmx0.55mm-40L package. It operates from 2.7V to 5.5V over the temperature range of -40°C to +105°C.

TYPICAL APPLICATION CIRCUIT

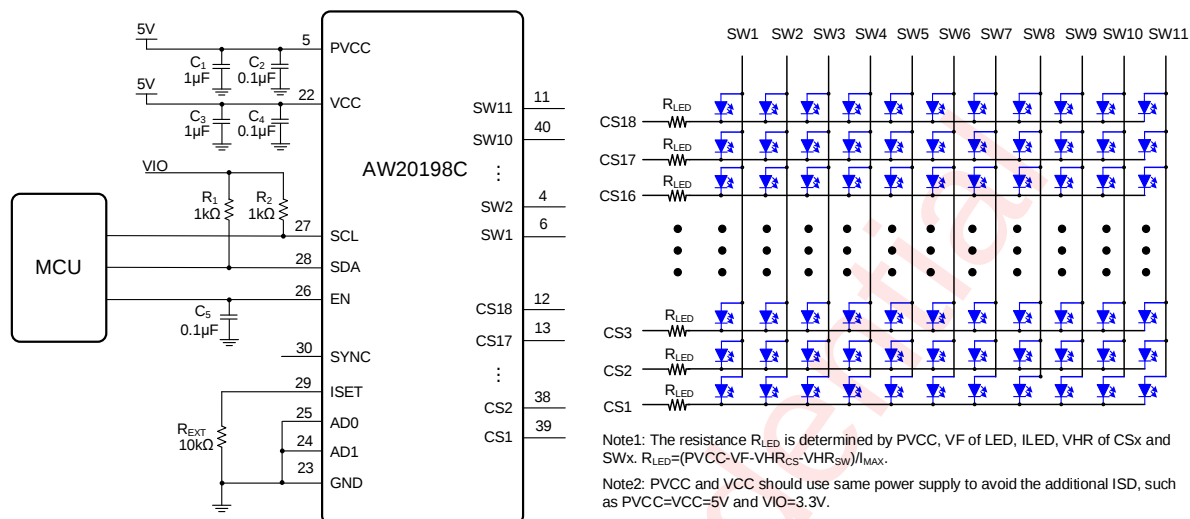


Figure 1 AW20198C Application Circuit

PIN CONFIGURATION AND TOP MARK

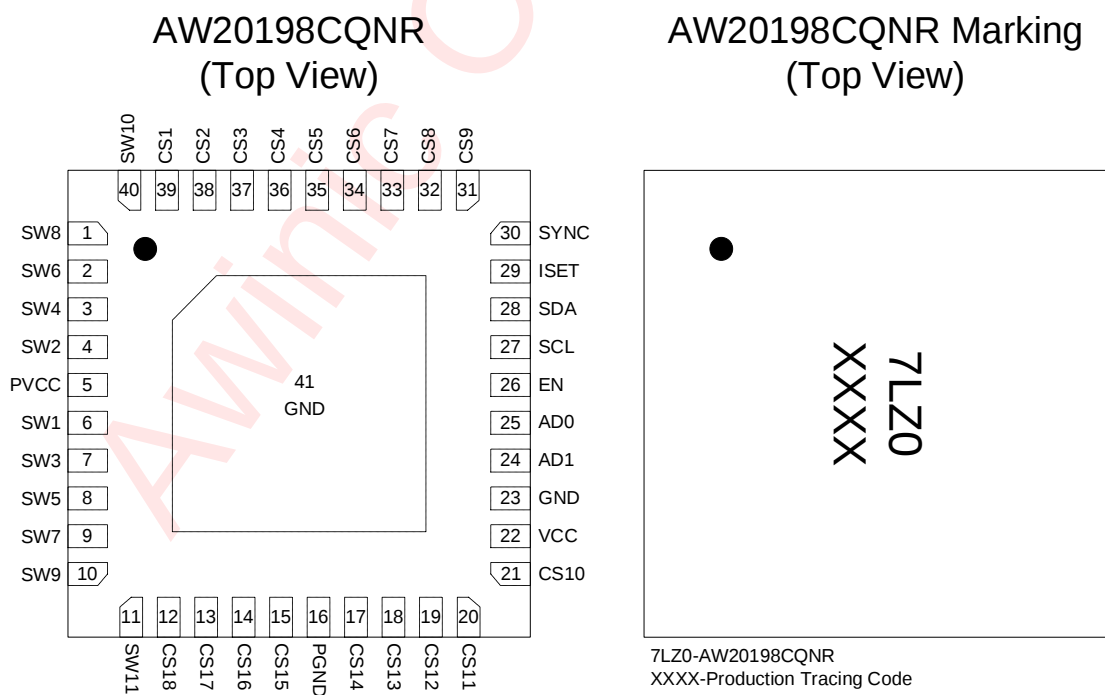


Figure 2 Pin Configuration and Top Marking

PIN DEFINITION

No.	NAME	DESCRIPTION
1~4	SW8, SW6, SW4, SW2	Current switches
5	PVCC	Current source power supply, 2.7V~5.5V
6~11	SW1, SW3, SW5, SW7, SW9, SW11	Current switches
12~15	CS18~CS15	Current sink
16	PGND	Power ground
17~21	CS14~CS10	Current sink
22	VCC	Power supply, 2.7V~5.5V
23	GND	Ground
24	AD1	I ² C address select pin1
25	AD0	I ² C address select pin0
26	EN	Standby the device when EN is low, internally pulled down to GND with a resistor of 1MΩ
27	SCL	Serial clock input for I ² C interface
28	SDA	Serial data I/O for I ² C interface
29	ISSET	When R _{EXT} =10kΩ, global current of LED is 40mA
30	SYNC	Synchronize pin, used to synchronize clock in multiple devices application, internally pulled down to GND with a resistor of 1MΩ
31~39	CS9~CS1	Current sink
40	SW10	Current switch
41	GND	Thermal pad

FUNCTIONAL BLOCK DIAGRAM

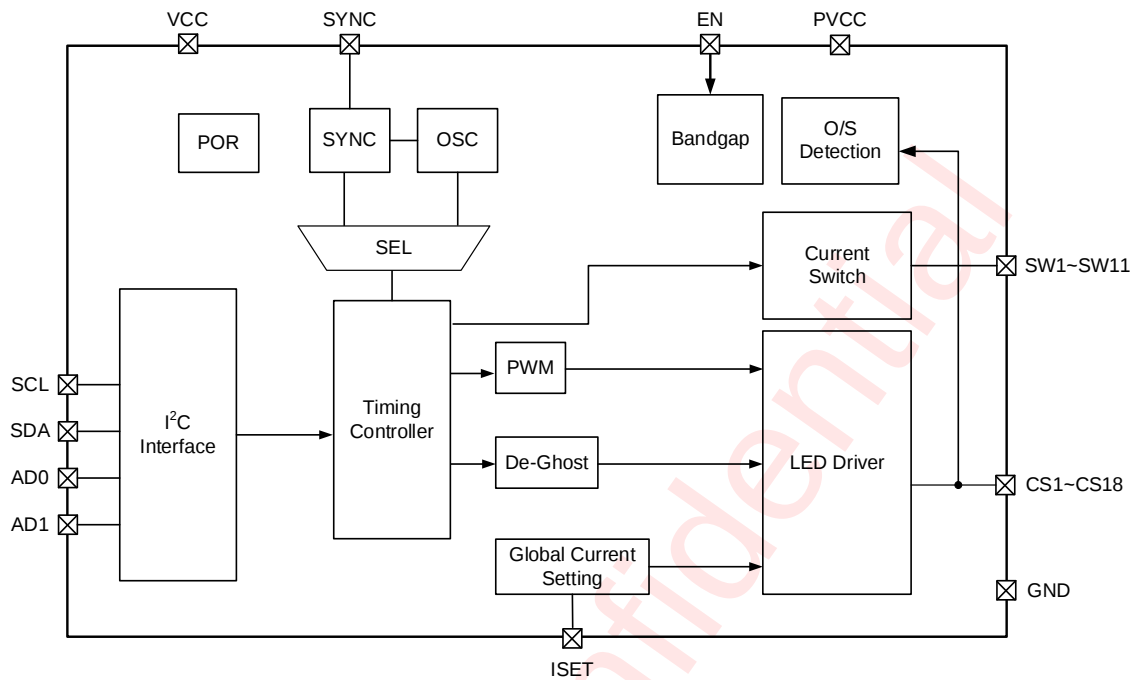


Figure 3 Functional Block Diagram

TYPICAL APPLICATION CIRCUIT

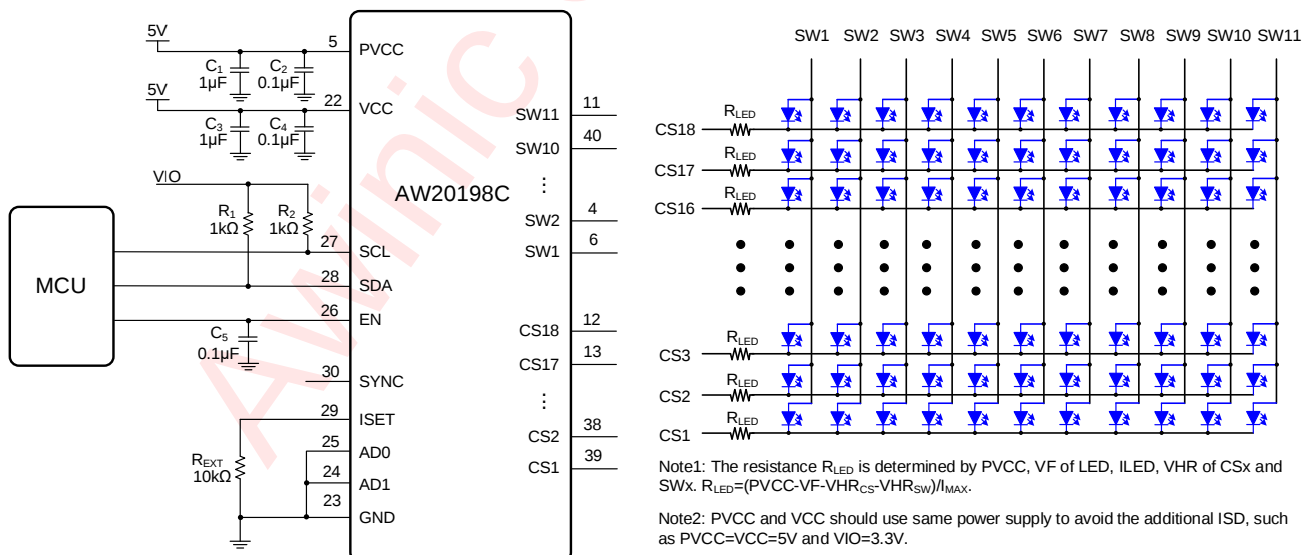


Figure 4 Typical Application Circuit

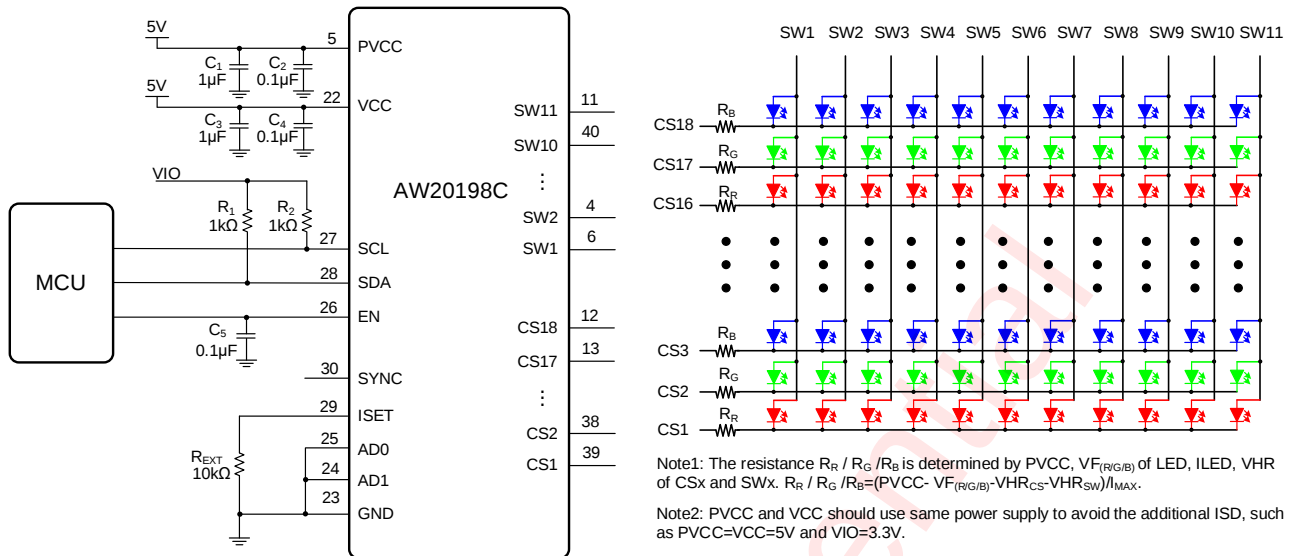


Figure 5 Typical Application Circuit (RGB)

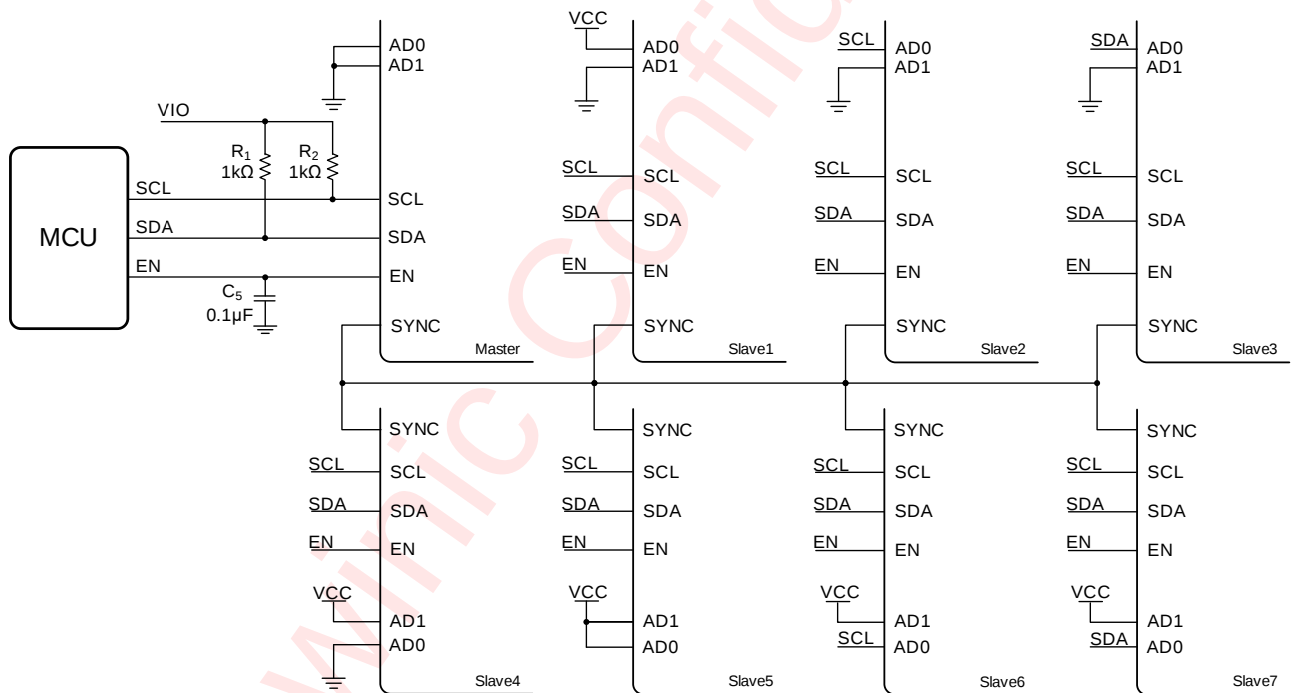


Figure 6 Typical Application Circuit (Eight Parts Synchronization)

ORDERING INFORMATION

Part Number	Temperature	Package	Marking	Moisture Sensitivity Level	Environmental Information	Delivery Form
AW20198CQNR	-40°C~105°C	QFN 5mmX5mm-40L	7LZ0	MSL3	ROHS+HF	6000 units/ Tape and Reel

ABSOLUTE MAXIMUM RATINGS (NOTE1)

PARAMETERS		RANGE
Supply voltage range VCC		-0.3V to 6V
Supply voltage range PVCC		-0.3V to 6V
Input voltage range	SCL, SDA, EN, AD0, AD1	-0.3V to VCC
Output voltage range	SW1~SW11	-0.3V to PVCC
	CS1~CS18	-0.3V to PVCC
Voltage on ISET	ISET	-0.3V to 2V
Junction-to-ambient thermal resistance θ_{JA}		33°C/W
Operating free-air temperature range		-40°C to 105°C
Maximum operating junction temperature T_{JMAX}		160°C
Storage temperature T_{STG}		-65°C to 150°C
Lead temperature (soldering 10 seconds)		260°C
ESD (NOTE2)		
HBM		±2kV
CDM		±1.5kV
Latch-Up		
Test condition: JESD78E		±IT: 200mA

NOTE1: Conditions out of those ranges listed in "absolute maximum ratings" may cause permanent damages to the device. In spite of the limits above, functional operation conditions of the device should within the ranges listed in "recommended operating conditions". Exposure to absolute-maximum-rated conditions for prolonged periods may affect device reliability.

NOTE2: The human body model is a 100pF capacitor discharged through a 1.5kΩ resistor into each pin. Test method: ESDA/JEDEC JS-001-2017 (HBM). ESDA/JEDEC JS-002-2018 (CDM)

Recommended Operating Conditions

Symbol	Parameter	Min.	Typ.	Max.	Unit
VCC	Input voltage	2.7	3.6	5.5	V
PVCC	Input voltage	2.7	5	5.5	V
C ₁ , C ₃	Input capacitance	1	1	22	μF
C ₂ , C ₄ , C ₅	Input capacitance	0.1	0.1	1	μF
R _{EXT}	External resistor for setting sink current	10	10	20	kΩ
T _A	Operating free-air temperature range	-40	25	105	°C


ELECTRICAL CHARACTERISTICST_A=25°C, PVCC=VCC=3.6V (unless otherwise noted), R_{EXT}=20kΩ

PARAMETER		TEST CONDITION	MIN	TYP	MAX	UNIT
Power supply voltage and current						
VCC	Input operating range		2.7		5.5	V
I _{STB_VCC}	Standby current	V _{EN} =0V or CHIPEN = 0		1.3		μA
I _{ACT_VCC}	Quiescent current in active mode	V _{EN} =VCC,CHIPEN=1, all LEDs off		1.8		mA
I _{MAX}	Maximum sink current(CS1~CS18)	V _{LED} =0.5V, R _{EXT} =20kΩ		20		mA
		V _{LED} =1V, R _{EXT} =10kΩ		40		mA
V _{HR}	Current switch headroom voltage SWx	I _{SWITCH} =360mA		300		mV
	Current sink headroom voltage CSx	I _{SINK} =20mA		360		mV
I _{MATCH}	Device to device current error	All Channels' current set to 20mA	-7		7	%
ΔI _{LED}	Channel to channel current error	All Channels' current set to 20mA	-7		7	%
F _{OSC}	OSC clock frequency		14.88	16	17.12	MHz
LOGIC (SCL,SDA,AD0,AD1,EN)						
V _{IL}	Input logic low	VCC=2.7V~5.5V,LGC=0			0.4	V
V _{IH}	Input logic high	VCC=2.7V~5.5V,LGC=0	1.4			V
V _{IL}	Input logic low	VCC=2.7V~5.5V,LGC=1			0.6	V
V _{IH}	Input logic high	VCC=2.7V~5.5V,LGC=1	2.4			V
Timing						
T _{SCAN}	Period of scanning	PCCR.PWMFRQ[2:0] = 000, GCR.SWSEL[3:0] = 1011		198		μs
T _{DG}	Non-overlap time between SW			1		μs
T _{HOLD}	Delay time between the falling edge of CS18 and SWx			125		ns
T _{SETUP}	Delay time between the rising edge of SWx and CS1	PCCR.PWMFRQ[2:0] = 000		250		ns
T _{DLY}	Delay time of each CS group, there are 6 groups of CS	PCCR.PWMFRQ[2:0] = 000		125		ns

Awinic Confidential

I²C INTERFACE TIMING

PARAMETER		FAST MODE			FAST MODE PLUS			UNIT
		MIN	TYP	MAX	MIN	TYP	MAX	
F _{SCL}	Interface clock frequency	-		400	-		1000	kHz
T _{HD:STA}	(Repeat-start) Start condition hold time	0.6		-	0.26		-	μs
T _{LOW}	Low level width of SCL	1.3		-	0.5		-	μs
T _{HIGH}	High level width of SCL	0.6		-	0.26		-	μs
T _{SU:STA}	(Repeat-start) Start condition setup time	0.6		-	0.26		-	μs
T _{HD:DAT}	Data hold time	0		-	0		-	μs
T _{SU:DAT}	Data setup time	0.1		-	0.05		-	μs
T _R	Rising time of SDA and SCL	-		0.3	-		0.12	μs
T _F	Falling time of SDA and SCL	-		0.3	-		0.12	μs
T _{SU:STO}	Stop condition setup time	0.6		-	0.26		-	μs
T _{BUF}	Time between start and stop condition	1.3		-	0.5		-	μs

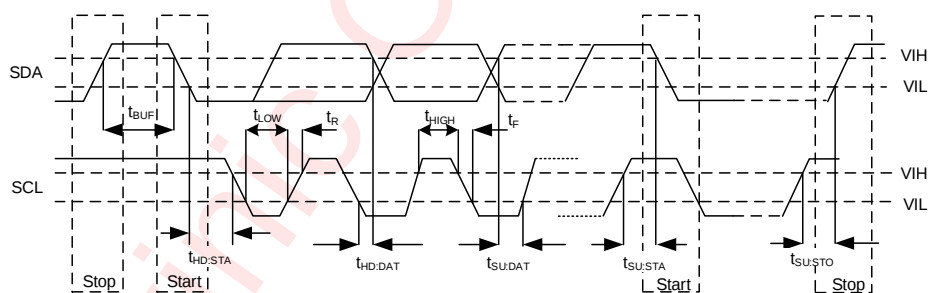Figure 7 I²C Interface Timing

DETAILED FUNCTIONAL DESCRIPTION

OPERATION MODE AND RESET

POWER ON RESET (POR)

During initial power-up, AW20198C is reset, and all registers are reset to default value, and LED driver is shut down.

Once the supply voltage VCC drops below the threshold voltage V_{POR_VCC} (2.0V), the power-on-reset will be activated to reset the device again. By reading the bit PUST of the register UVCR (page0, address=0x2A), it can be determined whether the device has been reset.

Below is the recommended operation timing:

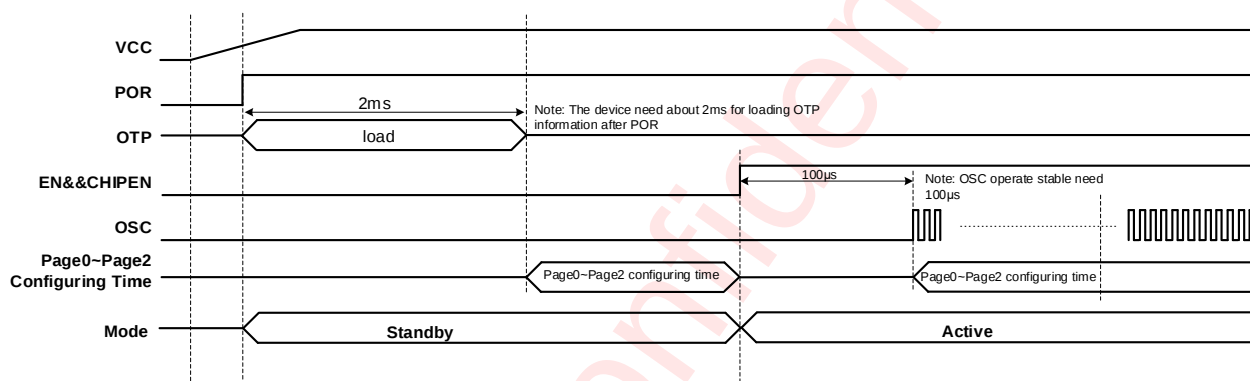


Figure 8 Power up Timing

SOFTWARE RESET

By writing 0xAE to register RSTN (page0, address=0x2F), the software reset is triggered. After software reset, all registers will be reset to the default value and enter into standby mode.

After the software reset command is input through I²C or power on reset, it needs to wait at least 2ms before any other I²C command can be accepted.

STANDBY MODE

When EN is pulled low or the bit CHIPEN of the register GCR (page0, address=0x00) is set to "0" or UVLO is triggered (UVFLG=1) in active mode, AW20198C enters into standby mode automatically. In standby mode, all analog blocks are power down but the registers retain the data and keep it available via I²C.

When POR is triggered, the device enters into standby mode and all registers will be reset (more information is showed in POWER ON RESET).

ACTIVE MODE

When EN is in high level, and the bit CHIPEN of the register GCR (page0, address=0x00) is set to "1", AW20198C enters into the active mode.

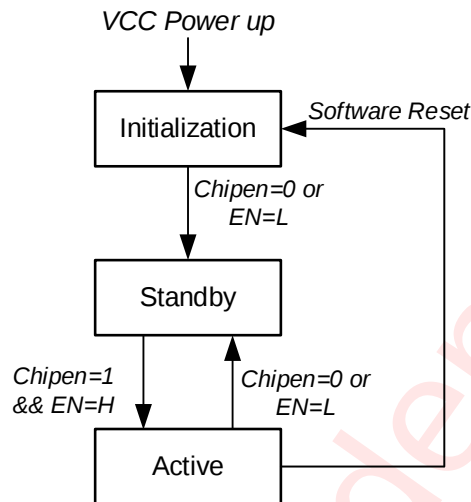


Figure 9 AW20198C Operating Mode Transition

I²C INTERFACE

AW20198C supports the I²C protocol. The maximum frequency supported by the I²C is 1MHz. The pull-up resistor for the SDA and SCL can be selected from 1k to 10kΩ. Usually, 4.7kΩ is recommended for 400 kHz I²C, 1kΩ is recommended for 1MHz I²C. The voltage from 1.8V to 3.3V is allowed for the I²C interface. Additionally, the I²C device supports continuous read and write operations.

DEVICE ADDRESS

The I²C device address is 7-bit (A7~A1), followed by the R/W bit A0 (Read=1/Write=0). Set A0 to “0” for writing and “1” for reading. The values of bits A4:A3 and bits A2:A1 are depended on the connection of pin AD1 and AD0. Separately, there are 4 options: VCC, GND, SCL and SDA. The A7 to A5 is “010” constantly. The device also supports using a broadcast slave address of 0x5A to access registers. All slave addresses as followed.

AD0	AD1	A7:A5	A4:A3	A2:A1	A0	Device Address	Broadcast Address
GND	GND	010	00	00	0/1	0x20	0x5A
GND	VCC		00	01		0x21	
GND	SCL		00	10		0x22	
GND	SDA		00	11		0x23	
VCC	GND		01	00		0x24	
VCC	VCC		01	01		0x25	
VCC	SCL		01	10		0x26	
VCC	SDA		01	11		0x27	
SCL	GND	010	10	00	0/1	0x28	0x5A
SCL	VCC		10	01		0x29	

AD0	AD1	A7:A5	A4:A3	A2:A1	A0	Device Address	Broadcast Address
SCL	SCL		10	10		0x2A	
SCL	SDA		10	11		0x2B	
SDA	GND		11	00		0x2C	
SDA	VCC		11	01		0x2D	
SDA	SCL		11	10		0x2E	
SDA	SDA		11	11		0x2F	

I²C START/STOP

I²C start: SDA changes from high level to low level when SCL is high level.

I²C stop: SDA changes from low level to high level when SCL is high level.

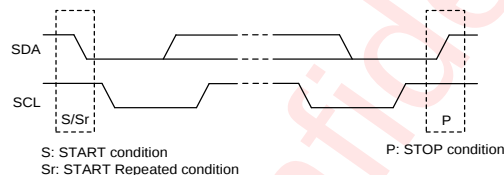


Figure 10 I²C Start/Stop Condition Timing

DATA VALIDATION

When SCL is high level, SDA level must be constant. SDA can be changed only when SCL is low level.

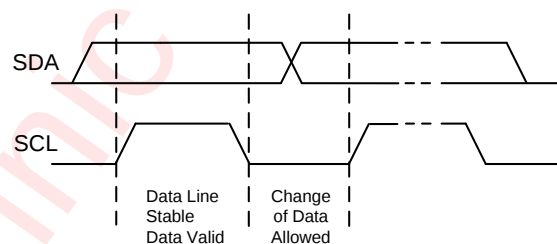


Figure 11 Data Validation Diagram

ACK (ACKNOWLEDGEMENT)

ACK means the successful transfer of I²C bus data. After master sends an 8-bit data, SDA must be released; SDA is pulled to GND by slave device when slave acknowledges.

When master reads, slave device sends 8-bit data, releases the SDA and waits for ACK from master. If ACK is send and I²C stop is not send by master, slave device sends the next data. If ACK is not send by master, slave device stops to send data and waits for I²C stop.

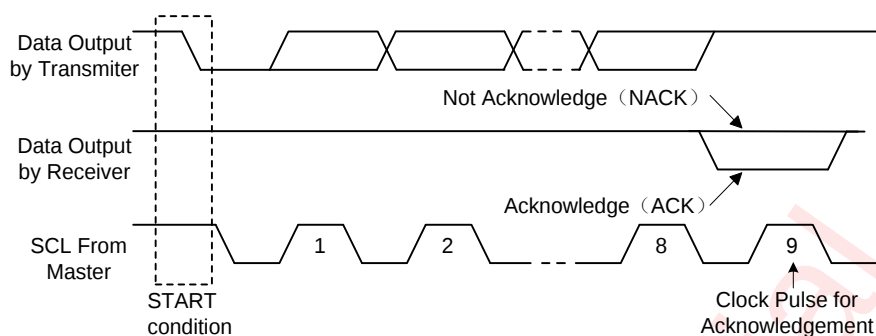


Figure 12 I²C ACK Timing

WRITE CYCLE

One data bit is transferred during each clock pulse. Data is sampled during the high state of the serial clock (SCL). Consequently, throughout the clock's high period, the data should remain stable. Any changes on the SDA line during the high state of the SCL and in the middle of a transaction, aborts the current transaction. New data should be sent during the low SCL state. This protocol allows a single data line to transfer both command/control information and data using the synchronous serial clock.

Each data transaction is composed of a start condition, a number of byte transfers (set by the software) and a stop condition to terminate the transaction. Every byte written to the SDA bus must be 8 bits long and is transferred with the most significant bit first. After each byte, an Acknowledge signal must follow.

In a write process, the following steps should be followed:

- Master device generates START condition. The "START" signal is generated by lowering the SDA signal while the SCL signal is high.
- Master device sends slave address (7-bit) and the data direction bit R/W = 0).
- Slave device sends acknowledge signal if the slave address is correct.
- Master sends control register address (8-bit).
- Slave sends acknowledge signal.
- Master sends data byte to be written to the addressed register.
- Slave sends acknowledge signal.
- If master will send further data bytes the control register address will be incremented by one after acknowledge signal (repeat step f and g).
- Master generates STOP condition to indicate write cycle end.

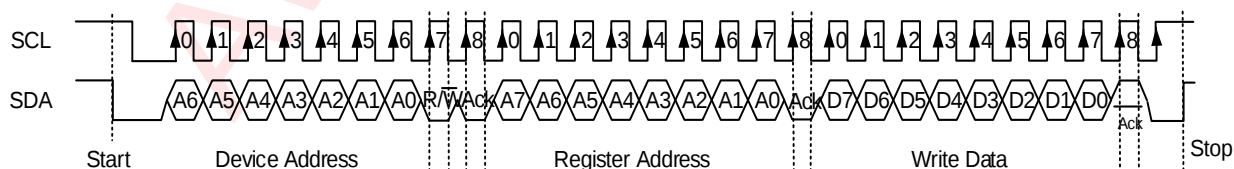


Figure 13 I²C Write Byte Cycle

READ CYCLE

In a read cycle, the following steps should be followed:

- Master device generates START condition.
- Master device sends slave address (7-bit) and the data direction bit ($R/W = 0$).
- Slave device sends acknowledge signal if the slave address is correct.
- Master sends control register address (8-bit).
- Slave sends acknowledge signal.
- Master generates STOP condition followed with START condition or REPEAT START condition.
- Master device sends slave address (7-bit) and the data direction bit ($R/W = 1$).
- Slave device sends acknowledge signal if the slave address is correct.
- Slave sends data byte from addressed register.
- If the master device sends acknowledge signal, the slave device will increase the control register address by one, then send the next data from the new addressed register.
- If the master device generates STOP condition, the read cycle is ended.

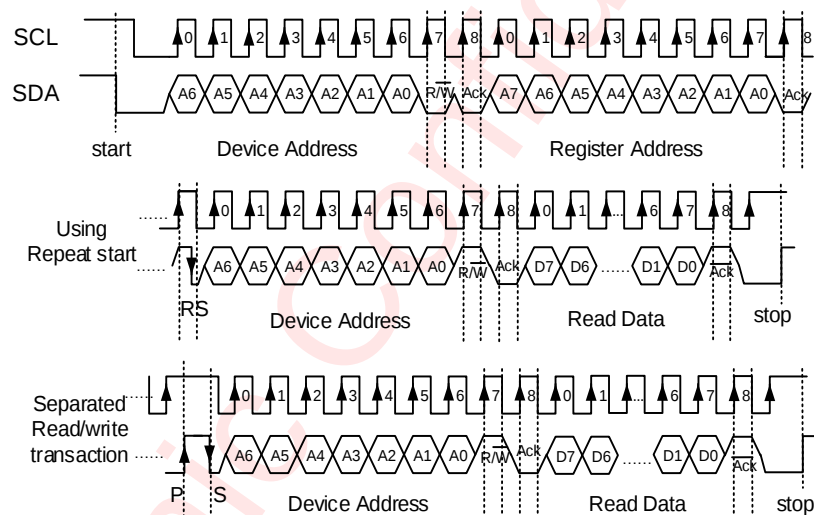


Figure 14 I²C Read Byte Cycle

LED OPEN/SHORT DETECTION

AW20198C supports LED open/short detection. When bits OSDE[1:0] of the register GCR (page0, address=0x00) are set to "11", open detection is enabled, and the detection results can be read out via the registers OSR0~OSR32 (page0, address=0x03~0x23) when CHIPEN is "1". Similarly, when set bits OSDE[1:0] of the register GCR (page0, address=0x00) to "10", short detection is enabled, and the results also can be read out via the registers OSR0~OSR32 when CHIPEN is "1". Each bit of OSR0~OSR32 store a LED's open/short status. Each OSR register stores 6 LEDs open/short status in bit5~bit0. For example, OSR0 stores the status of LED0~LED5, in which MSB is status of LED5, and LSB is status of LED0.

	CS1	CS2	CS3	CS4	CS5	CS6	CS7	CS8	CS9	CS10	CS11	CS12	CS13	CS14	CS15	CS16	CS17	CS18
SW1	OSR0						OSR1						OSR2					
SW2	OSR3						OSR4						OSR5					
SW3	OSR6						OSR7						OSR8					
SW4	OSR9						OSR10						OSR11					
SW5	OSR12						OSR13						OSR14					
SW6	OSR15						OSR16						OSR17					
SW7	OSR18						OSR19						OSR20					
SW8	OSR21						OSR22						OSR23					
SW9	OSR24						OSR25						OSR26					
SW10	OSR27						OSR28						OSR29					
SW11	OSR30						OSR31						OSR32					

Figure 15 Open/Short Register

The valid detect result is determined by:

Short detection: $V_{cs} > PVCC - V_{TH_{SHORT}}$

Open detection: $V_{cs} < V_{TH_{OPEN}}$

$V_{TH_{SHORT}}$: Threshold of short detection ($V_{TH_{SHORT}} = 1.5V$, typical).

$V_{TH_{OPEN}}$: Threshold of open detection ($V_{TH_{OPEN}} = 0.1V$, typical).

The recommend configuration in $PVCC=4.2V$ is:

- $PSEL[1:0] = 2'b00$, (page0.PCCR[1:0]);
- $0x20 \leq PWM[7:0] \leq 0xFF$, (page1.PWMn, n=0~197);

LED DISPLAY AND CONTROL

LED DISPLAY CONTROL DESCRIPTION

The device supports up to 198 LEDs. The location of each LED is shown by the following figure. The parameter location in page1 is the same as the LED.

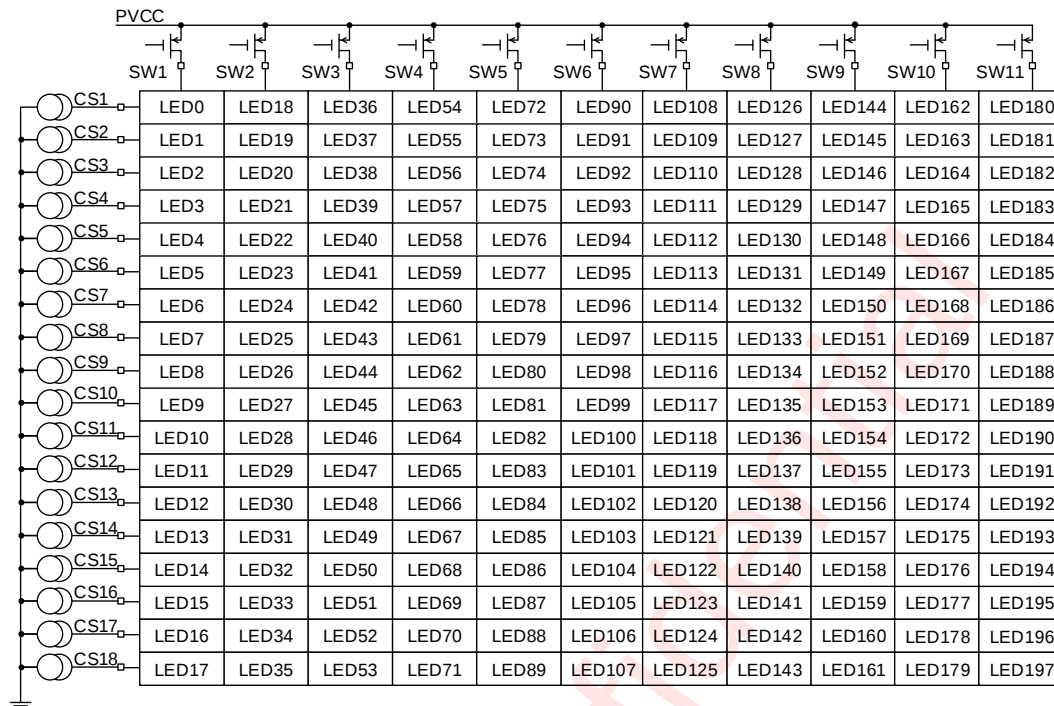


Figure 16 LED Location

In AW20198C, each LED is controlled by 1 independent parameters:

- PWM[7:0] control, register PWMn (page1, address=0x00~0xC5, n=0~197)

SCANNING TIMING

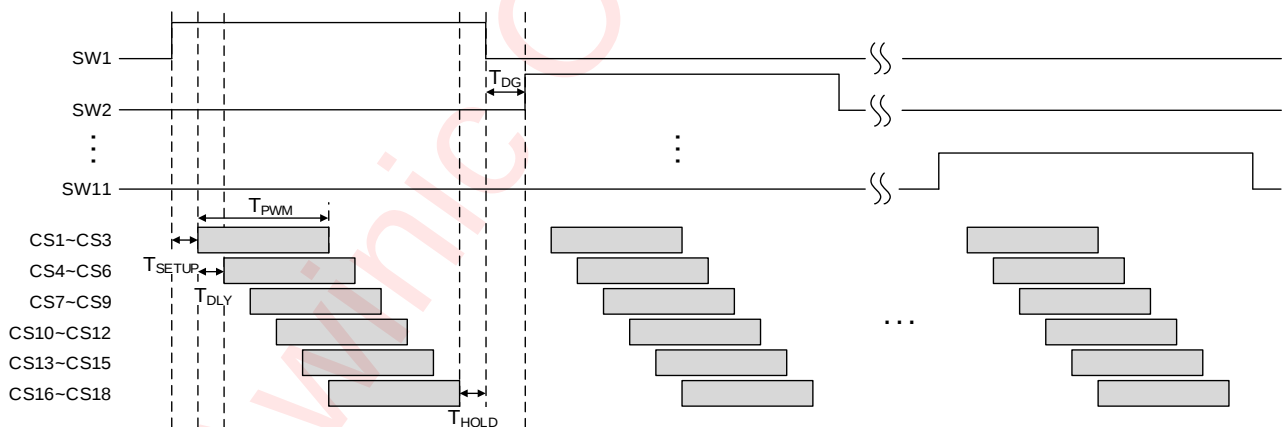


Figure 17 Scanning Timing

As shown in scanning timing figure, the SW1~SW11 is turned on by serial, LED is driven by CS1~CS18 within the SWx (x=1~11) active time. T_{DG} is the non-overlap between SW is De-Ghost time. T_{SETUP} is the delay time between the rising edge of SWx and CS1. SW Control 18 channels current sink (CS1~CS18). CS are divided into 6 groups, and each group has a delay time, which is T_{DLY} . T_{PWM} is PWM active time when the register PWMn=0xFF (n=0~197), and T_{HOLD} is the time between the falling edge of CS18 and SWx. In addition, SW scanning number N (N=1~11) can be controlled by bits SWSEL[3:0] in register GCR. N is the sum of 1 and the value of SWSEL[3:0], when the value of SWSEL[3:0] is below 2'b1011. Otherwise N is 11.

When PCCR.PWMFRQ[2:0] = 000 (page0, address=0x29), the DUTY is:

$$DUTY = \frac{15.9375us}{0.25us + 5 \times 0.125us + 16us + 0.125us + 1us} \times \frac{1}{N}$$

Where $T_{PWM} = 15.9375us$, $T_{SETUP} = 0.25us$, $T_{DLY} = 0.125us$, $T_{HOLD} = 0.125us$, and $T_{DG} = 1us$. The period of PWM is $16us$. N is the SW scanning number.

The average output current of LED_n ($n=0\sim197$) can be expressed by the following formula,

$$I_{LED} = \frac{K}{R_{EXT}} \times \frac{PWM_n}{255} \times DUTY$$

Where $K = 400V$, and R_{EXT} is the value of external resistor.

PWM MODULATION

PWM FREQUENCY

The PWM frequency is decided by bits $PWMFRQ[2:0]$ of register $PCCR$ (page0, address=0x29). Following table shows the relationship of PWM frequency and the $PWMFRQ[2:0]$. To avoid the MLCC audible noise, it's recommended to use the PWM frequency higher than 20 kHz.

PWMFRQ[2:0]	000	001	010	011	100	101	110	111
PWM Freq.	62.5kHz	31.25kHz	15.6kHz	7.8kHz	3.9kHz	1.95kHz	975Hz	488Hz

EMI REDUCTION

SLEW RATE

AW20198C supports programmed slew rate control, which can change the transition time of the LED current sink (CS1~CS18) on or off, so as to achieve the effect of reducing EMI. The slew rate control is configured by the bits SRR and $SRF[1:0]$ of register $SRCCR$ (page0, address=0x2B).

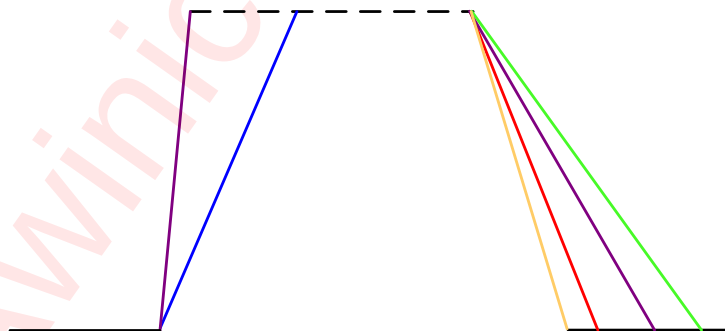


Figure 18 Slew Rate Control

SPREAD SPECTRUM

AW20198C has spread spectrum function to optimize the EMI performance. If bit SSE in register $SSCR$ (page0, address=0x28) is set to "1", spread spectrum function is enabled. By setting the bit SSR in register $SSCR$ (page0, address=0x28), four spread spectrum range 5%, 15%, 25% and 35% can be selected. The total electromagnetic emitting energy can spread into a wider range of frequency band that significantly degrades the peak energy of EMI.

DE-GHOST FUNCTION

To prevent the LED ghost effect, AW20198C has integrated pull down voltage setting for each SWx (x=1~11) and pull up voltage setting for each CSx (x=1~18). The De-Ghost function is disabled when bit DG_ENB of register DGCR (page0, address=0x02) is set to "1", and the DG_ENB is "0" in default. Select the right SWx pull down voltage, SWPD [1:0] of register DGCR (page0, address=0x02) and CSx pull up voltage, CSPU[5:4] of register DGCR (page0, address=0x02). Which eliminate the ghost LED for a particular matrix layout configuration, selecting the voltage setting will be sufficient to eliminate the LED ghost phenomenon. Lower value of SWPD and Higher value of CSPU will have stronger De-Ghost ability to LED and may let LED have higher reverse voltage. Recommend setting is SWPD= 1.1V, CSPU= PVCC-1.3V (Reverse voltage of LED is around -2.6V, when PVCC=5V).

When AW20198C works in standby mode, the De-Ghost function should be disabled.

MULTIPLE DEVICE SYNCHRONIZATION

AW20198C supports multiple device synchronization to drive more than 198 LEDs by cascade of multiple devices. In this application, all devices share a common clock, one device works as a master to output common clock on pin SYNC, and other devices work as slave to use external input clock from pin SYNC. Bit CLKOE and CLKSEL in Register SSCR (page0, address=0x28) select the clock input or output on pin SYNC.

CLKOE	CLKSEL	Device Clock Selection
0	0	Use Internal clock and pin SYNC is high-Z
1	0	Master, use internal clock and output it on pin SYNC
0	1	Slave, use external clock from pin SYNC
1	1	Forbidden

REGISTER CONFIGURATION

REGISTER CONTROL

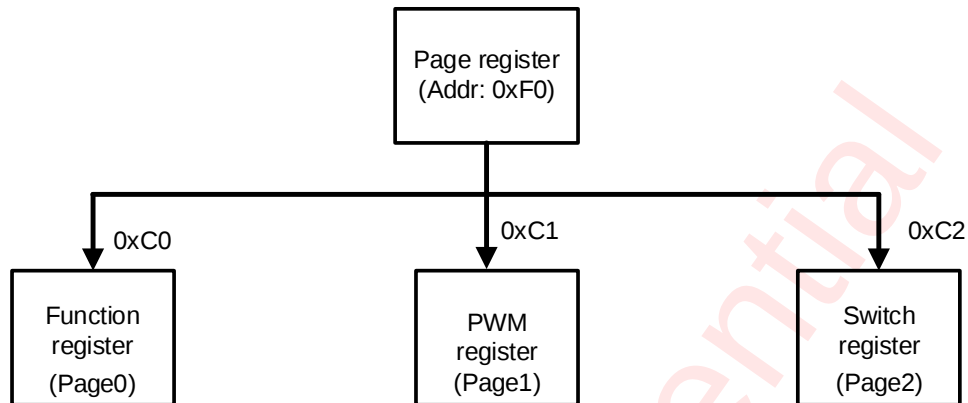


Figure 19 Register Control

Page register (address=0xF0) can select page from page0 to page2. User can choose page0~page2 by writing 0xC0~0xC2 to the page register in any page.

REGISTER LIST

Page0: Function Register List

ADD R	NAME	R/W	Bit7	Bit6	Bit5	Bit4	Bit3	Bit2	Bit1	Bit0	Default
0x00	GCR	R/W	SWSEL				LGC	OSDE		CHIPEN	0xB0
0x01	CS_MS	R/W	CS_MS								0x00
0x02	DGCR	R/W	DG_ENB	-	CSPU		-		SWPD		0x44
0x03 ~ 0x23	OSR0 ~ OSR32	R	-		LED0~LED197 Open/Short status register					0x00	
0x27	OTCR	R/W	OTFLG	OTPD	OTDIS	TRFLG	TRTH		TROF		0x00
0x28	SSCR	R/W	CLKOE	CLKSEL	-	SSE	SRR		CLT		0x00
0x29	PCCR	R/W	PWMFRQ			-					0x00
0x2A	UVCR	R/W	REXT_ST				PUST	UVFLG	UVPD	UVDIS	0x00
0x2B	SRCR	R/W	-		OTH	STH	-	SRR	SRF		0x02
0x2F	RSTN	R/W	RSTN/ID								0x71
0xF0	PAGE	R/W	-					PAGE			0x00

Page1: PWM Register List

ADDR	NAME	R/W	Bit7	Bit6	Bit5	Bit4	Bit3	Bit2	Bit1	Bit0	Default
0x00	PWM0	R/W	PWM0								0x00
0x01	PWM1	R/W	PWM1								0x00
...	...	R/W	...								0x00
0xC5	PWM197	R/W	PWM197								0x00
0xF0	PAGE	R/W	-					PAGE			0x00

Page2: Current Source Dot Switch Register List

ADDR	NAME	R/W	Bit7	Bit6	Bit5	Bit4	Bit3	Bit2	Bit1	Bit0	Default
0x00	CS_DS0	R/W	CS_DS0								0x00
0x01	CS_DS1	R/W	CS_DS1								0x00
...	...	R/W	...								0x00
0xC5	CS_DS197	R/W	CS_DS197								0x00
0xF0	PAGE	R/W	-					PAGE			0x00

REGISTER DETAILED DESCRIPTION

GCR: Global Control Register (Page 0: Address 0x00)

Bit	Symbol	R/W	Description	Default
7:4	SWSEL	R/W	Active the SW number select 0000: SW1 active SW2~SW11 not active 0001: SW1~SW2 active SW3~SW11 not active 0010: SW1~SW3 active SW4~SW11 not active 0011: SW1~SW4 active SW5~SW11 not active 0100: SW1~SW5 active SW6~SW11 not active 0101: SW1~SW6 active SW7~SW11 not active 0110: SW1~SW7 active SW8~SW11 not active 0111: SW1~SW8 active SW9~SW11 not active 1000: SW1~SW9 active SW10~SW11 not active 1001: SW1~SW10 active SW11 not active 1010~1111: SW1~SW11 active	1011
3	LGC	R/W	Logic level select 0: 1.4/0.4V 1: 2.4/0.6V	0
2:1	OSDE	R/W	Open/short detect enable 0x: Detect disable 10: Short detect 11: Open detect	00
0	CHIPEN	R/W	Chip enable 0: Disable 1: Enable	0

CS_MS: Current Source Main Switch (Page 0: Address 0x01)

Bit	Symbol	R/W	Description	Default
7:0	CS_MS	R/W	Current Source Main Switch, set to 0xFF to enable	0x00

DGCR: De-ghost Control Register (Page 0: Address 0x02)

Bit	Symbol	R/W	Description	Default
7	DG_ENB	R/W	De-Ghost disable (x=1~18): 0: De-Ghost enable 1: De-Ghost disable	0
6	RESERVED	R	Reserved	1
5:4	CSPU	R/W	CS pull up select 00: PVCC-1.3V 01: PVCC-2.0V 10: PVCC-0.5V 11: PVCC	00
3:2	RESERVED	R	Reserved	01
1:0	SWPD	R/W	SW pull down select 00: 1.1V 01: 1.9V 10: 5V 11: GND	00

OSR0~OSR32: Open/Short Status Register (Page 0: Address 0x03~0x23)

Bit	Symbol	R/W	Description	Default
7:6	RESERVED	R	Reserved	00
5:0	OSR	R	Open/short status of LED0~LED197 0: Open/short not happen 1: Open/short happen	000000

OTCR: Over Temperature Control Register (Page 0: Address 0x27)

Bit	Symbol	R/W	Description	Default
7	OTFLG	R	Over temperature flag 0: Over-temperature not happen 1: Over-temperature happen	0
6	OTPD	R/W	Over-temperature(OT) protect disable 0: OT protect enable, when OT event occurs, device will clear GCR.CHIPEN to 0. 1: OT protect disable	0
5	OTDIS	R/W	Over-temperature detect disable 0: OT detect enable, when OT event occurs, OTCR.OTFLAG will be set. 1: OT detect disable	0
4	TRFLG	R	Thermal roll off status 0: Roll off not happen 1: Roll off happen	0
3:2	TRTH	R/W	Thermal roll threshold 00: 140°C 01: 120°C 10: 100°C 11: 90°C	00
1:0	TROF	R/W	Thermal roll off percentage of I _{OUT} 00: 100% 01: 75% 10: 55% 11: 30%	00

SSCR: Spread Spectrum Control Register (Page 0: Address 0x28)

Bit	Symbol	R/W	Description	Default
7	CLKOE	R/W	Clock output enable 0: Disable 1: Enable	0
6	CLKSEL	R/W	0: Use internal 16MHz OSC clock 1: Use clock input from pin SYNC	0
5	RESERVED	R	Reserved	0
4	SSE	R/W	Spread spectrum enable 0: Disable 1: Enable	0
3:2	SSR	R/W	Spread spectrum range 00: ±5% 01: ±15% 10: ±25% 11: ±35%	00

Bit	Symbol	R/W	Description	Default
1:0	CLT	R/W	Spread spectrum cycle time 00: 1980μs 01: 1200μs 10: 820μs 11: 660μs	00

PCCR: PWM Clock Control Register (Page 0: Address 0x29)

Bit	Symbol	R/W	Description	Default
7:5	PWMFRQ	R/W	PWM frequency selection 000: 62.5kHz 001: 32.25kHz 010: 15.6kHz 011: 7.8kHz 100: 3.9kHz 101: 1.95kHz 110: 977Hz 111: 488Hz	000
4:0	RESERVED	R	Reserved	00000

UVCR: UVLO Control Register (Page 0: Address 0x2A)

Bit	Symbol	R/W	Description	Default
7:6	REXT_ST	R	REXT status 00: Normal 10: REXT is open 01: REXT is short or OCP 11: Not defined	00
5:4	RESERVED	R	Reserved	0
3	PUST	R	Power-up reset status 0: Power-up reset not happen 1: Power-up reset happen	0
2	UVFLG	R	UVLO status 0: UVLO not happen 1: UVLO happen	0
1	UVPD	R/W	UVLO protect disable 0: UVLO protect enable, when under-voltage event occurs, device will clear GCR.CHIPEN to 0. 1: UVLO protect disable	0
0	UVDIS	R/W	UVLO detect disable 0: UVLO detect enable, when under-voltage event occurs, UVCR.UVFLG will be set.	0

Bit	Symbol	R/W	Description	Default
			1: UVLO detect disable	

SRCR: Open/Short Control Register (Page 0: Address 0x2B)

Bit	Symbol	R/W	Description	Default
7:6	RESERVED	R	Reserved	00
5	OTH	R/W	Open threshold 0: 0.1V 1: 0.2V	0
4	STH	R/W	Short threshold 0: PVCC-1.5V 1: PVCC-0.8V	0
3	RESERVED	R	Reserved	0
2	SRR	R/W	Slew rate control for LED output rising time 0: 1ns 1: 6ns	0
1:0	SRF	R/W	Slew rate control for LED output falling time 00: 1ns 01: 3ns 10: 6ns 11:10ns	10

RSTN: Reset Register (Page 0: Address 0x2F)

Bit	Symbol	R/W	Description	Default
7:0	RSTN	R/W	Write 0xAE to the register will reset all registers to their default value. The chip ID will be read out from the register.	0x71

PWMx (x=0~197): PWM Configure Register (Page 1: Address 0x00~0xC5)

Bit	Symbol	R/W	Description	Default
7:0	PWMx	R/W	PWM modulated	0x00

CS_DSx (x=0~197): Current Source Dot Switch Configure Register (Page 2: Address 0x00~0xC5)

Bit	Symbol	R/W	Description	Default
-----	--------	-----	-------------	---------

7:0	CS_DSx	R/W	Current Source Dot Switch, set to 0xFF to enable	0x00
-----	--------	-----	--	------

Awinic Confidential

APPLICATION INFORMATION

PVCC and VCC should use same power supply to avoid the additional ISD, such as PVCC=VCC=5V and VIO=3.3V.

If the equipment has antenna, the IC should be far away from the antenna in order to avoid the EMI.

R_{EXT}

The selection of R_{EXT} determined the maximum LED0~LED197 current I_{MAX} as described in below formula (1).

$$I_{MAX} = \frac{K}{R_{EXT}} \quad (1)$$



When R_{EXT} = 10KΩ, I_{MAX} = 40mA, I_{SWITCH} = 720mA

PCB LAYOUT CONSIDERATION

AW20198C is an 18x11 matrix LED driver programmed via an I²C compatible interface. When all LEDs are operating, the device power dissipation is large. To obtain the good thermal performance and avoid thermal shutdown, PCB layout should be considered carefully. Here are some guidelines:

1. The C₁、C₂、C₃、C₄、C₅ should be placed as close to the chip as possible.
2. The R_{EXT} should be placed as close to the chip as possible.
3. The Thermal PAD must be well connecting to the GND of the PCB, and add as many thermal via as possible beneath the thermal PAD on the PCB for the heat conductivity of the device and PCB.

TAPE AND REEL INFORMATION

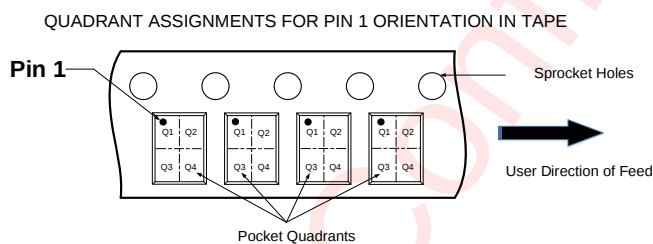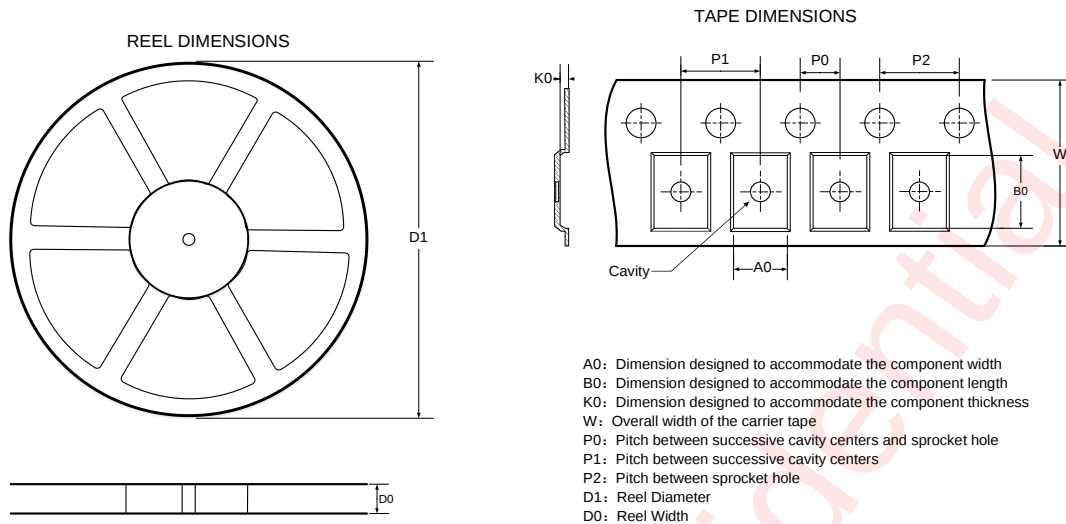


DIMENSIONS AND PIN1 ORIENTATION


D1 (mm)	D0 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P0 (mm)	P1 (mm)	P2 (mm)	W (mm)	Pin1 Quadrant
330	12.4	5.25	5.25	0.8	2	8	4	12	Q1

All dimensions are nominal


PACKAGE DESCRIPTION

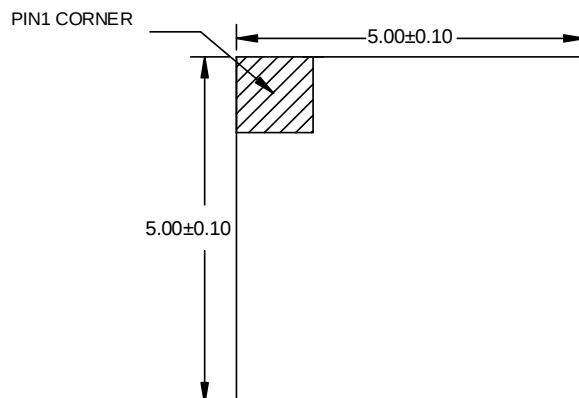

Top View

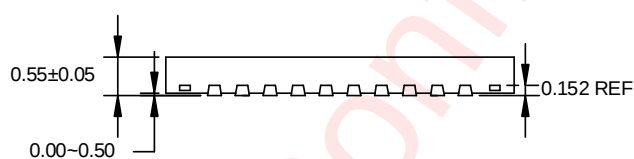



Side View

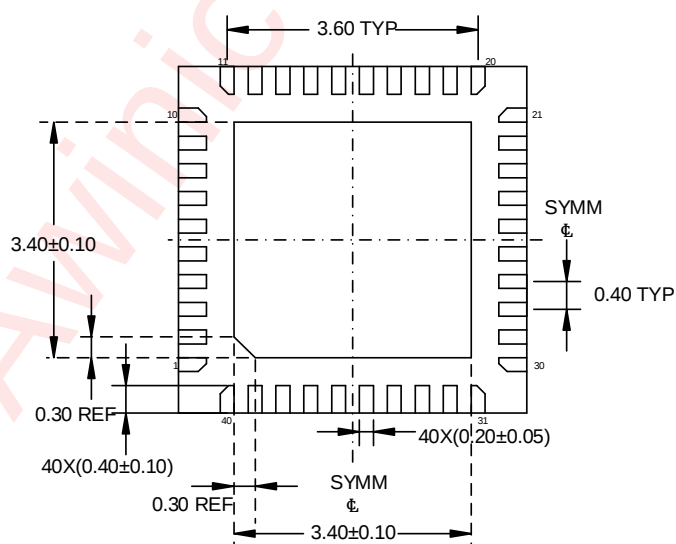


Bottom View

Unit: mm

LAND PATTERN DATA

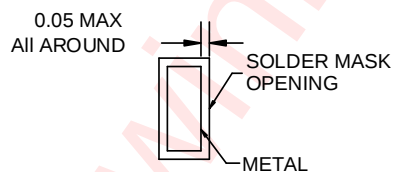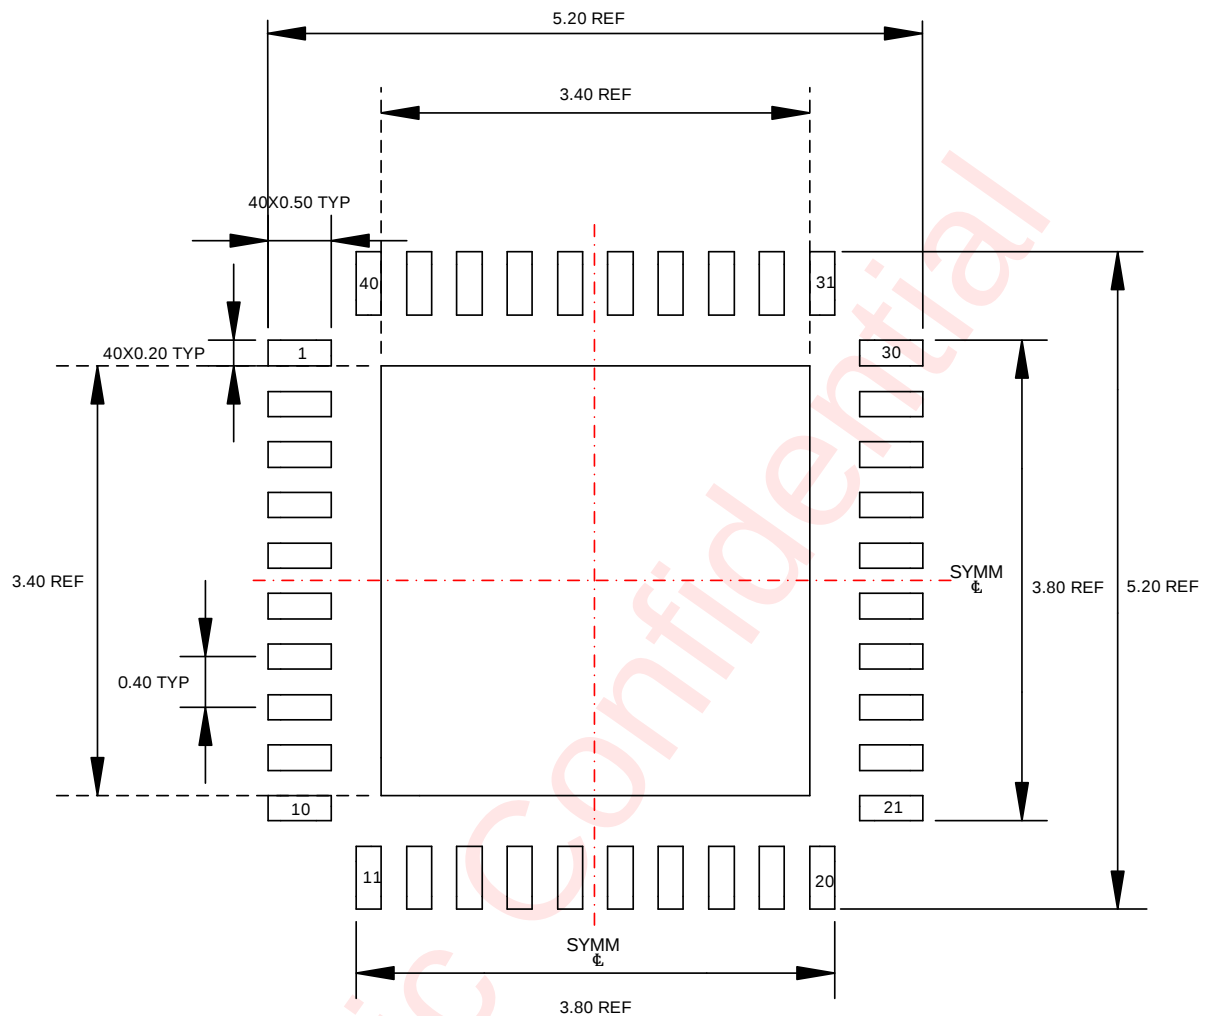

NON SOLDER MASK DEFINED

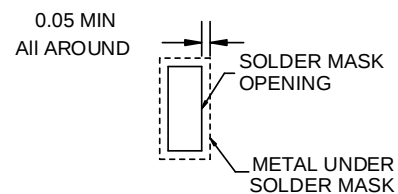

SOLDER MASK DEFINED

Unit: mm

REVISION HISTORY

Version	Date	Change Record
V1.0	Nov. 2025	Officially released
V1.1	Jan. 2026	1. Add maximum output current description in FEATURES (p1) 2. Add 40mA of I _{MAX} in ELECTRICAL CHARACTERISTICS (p8) 3. Update description of DG_ENB (p21)

Awinic Confidential

DISCLAIMER

All trademarks are the property of their respective owners. Information in this document is believed to be accurate and reliable. However, Shanghai AWINIC Technology Co., Ltd (AWINIC Technology) does not give any representations or warranties, expressed or implied, as to the accuracy or completeness of such information and shall have no liability for the consequences of use of such information.

AWINIC Technology reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. Customers shall obtain the latest relevant information before placing orders and shall verify that such information is current and complete. This document supersedes and replaces all information supplied prior to the publication hereof.

AWINIC Technology products are not designed, authorized or warranted to be suitable for use in medical, military, aircraft, space or life support equipment, nor in applications where failure or malfunction of an AWINIC Technology product can reasonably be expected to result in personal injury, death or severe property or environmental damage. AWINIC Technology accepts no liability for inclusion and/or use of AWINIC Technology products in such equipment or applications and therefore such inclusion and/or use is at the customer's own risk.

Applications that are described herein for any of these products are for illustrative purposes only. AWINIC Technology makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.

All products are sold subject to the general terms and conditions of commercial sale supplied at the time of order acknowledgement.

Nothing in this document may be interpreted or construed as an offer to sell products that is open for acceptance or the grant, conveyance or implication of any license under any copyrights, patents or other industrial or intellectual property rights.

Reproduction of AWINIC information in AWINIC data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. AWINIC is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions.

Resale of AWINIC components or services with statements different from or beyond the parameters stated by AWINIC for that component or service voids all express and any implied warranties for the associated AWINIC component or service and is an unfair and deceptive business practice. AWINIC is not responsible or liable for any such statements.