
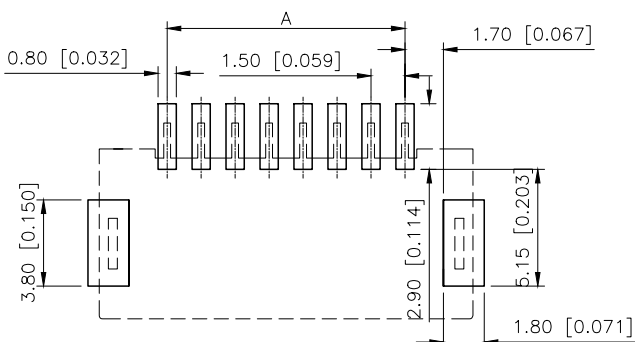
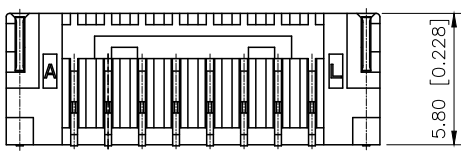

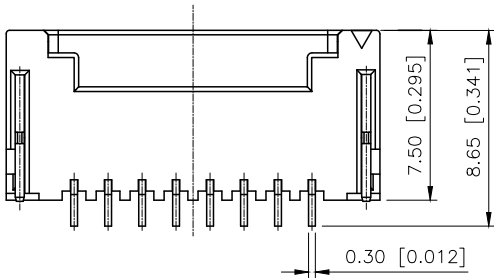
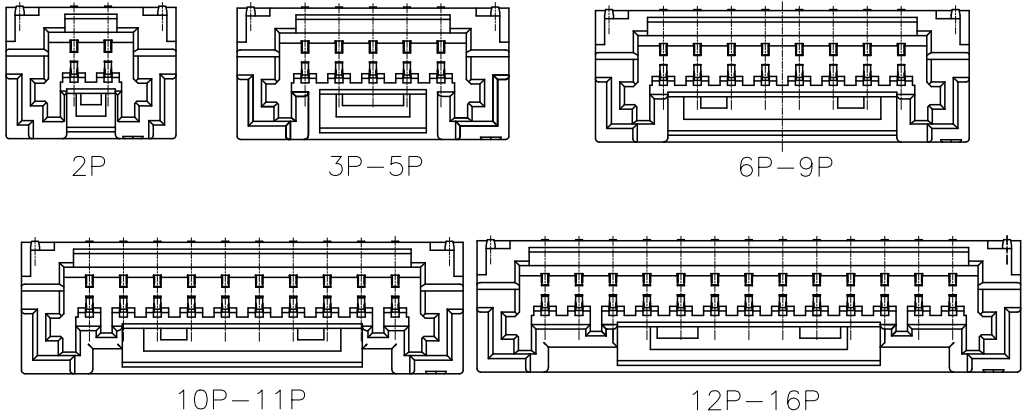


REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		图面升级整理图面	2024.12.18	阿树

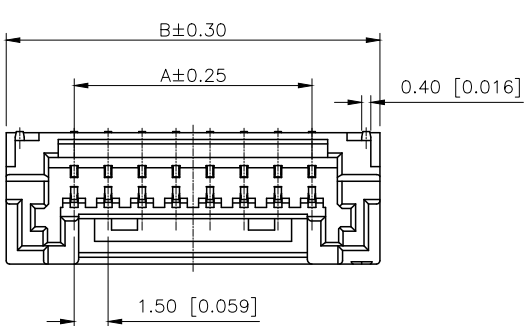

PCB LAYOUT(Tolerance:±0.05)

Specifications:
规格:
Voltage rating:100V AC/DC
额定电压: 100V AC/DC
Current rating:2A AC/DC
额定电流: 2A AC/DC
Withstanding voltage:500V AC/minute
耐受电压: 500V AC/分钟
Temperature range:-40℃--+125℃
温度范围: -40℃--+125℃
Insulation resistance:≥500MΩ
绝缘电阻: ≥500MΩ
Contact resistance:≤20mΩ
接触电阻: ≤20mΩ

PART NO.:

X1507 W R S-XX-9T SN
① ② ③ ④ ⑤ ⑥ ⑦

- ①Series No
- ②Category:W-Wafer
- ③Welding Board Angle:R-Stright 90°
- ④Welding way :S-SMT
- ⑤Row No.-Pin No.:XX-02P~16P
- ⑥Material:9T-PA9T 94V-0
- ⑦Plating Category:Sn-Bright Tin Plating

Poles	Dimensions (mm)		Poles	Dimensions (mm)	
	A	B		A	B
02	1.50	7.50	10	13.50	19.50
03	3.00	9.00	11	15.00	21.00
04	4.50	10.50	12	16.50	22.50
05	6.00	12.00	13	18.00	24.00
06	7.50	13.50	14	19.50	25.50
07	9.00	15.00	15	21.00	27.00
08	10.50	16.50	16	22.50	28.50
09	12.00	18.00			

X1507WRS-XX-9TSN	PA9T UL 94V-0	Phosphor Bronze	SN-Plated	X1507H
PART NO	Material	Material	Finish(Pin)	Suitable XKB Terminal

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERANCES	



DESIGN	阿树
CHECKED	
APPROVED	

VIEW: UNIT: mm/in SIZE: A4

MODEL TYPE: 1.5mm Crimp Style Connector
PART NO.: X1507WRS-XX-9TSN
DWG NO.: