

Pitch: 1.27mm(0.05" ) 0.40 SQ Pin  
Single Row Right Angle Dip Type


**Specifications**

Current Rating: 1.0 Ampere  
Insulation Resistance: 1000MΩ Min  
Dielectric Withstanding: 300V AC  
Contact Resistance: 20mΩ Max  
Operating Temperature: -40°C to +105°C


**Materials**

Contact Material: Brass  
Insulation Material: Polyester, UL 94V-0  
LCP/NL6T

All material RoHS&Reach Compliant  
Halogen-free is available

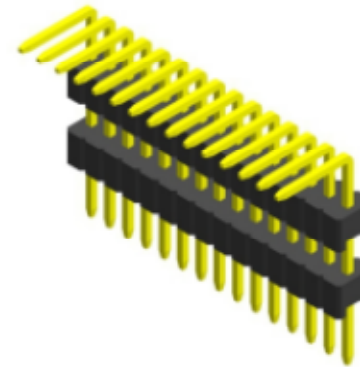


Mating with





HFISS43




HFISR43



HFISN43

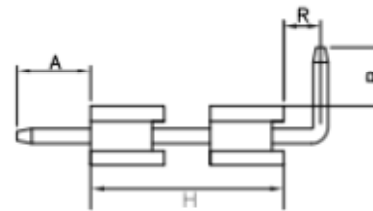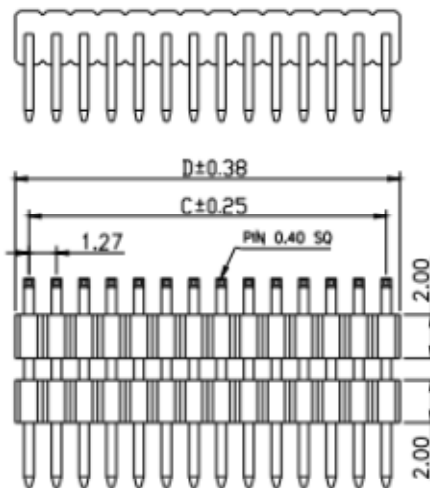

Recommended  
P.C.Board  
Hole Layout



No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information	
	C	D		C	D		C	D		C	D
02	1.27	2.54	11	12.70	13.97	20	24.13	25.40	29	35.56	36.83
03	2.54	3.81	12	13.97	15.24	21	25.40	26.67	30	36.83	38.10
04	3.81	5.08	13	15.24	16.51	22	26.67	27.94	31	38.10	39.37
05	5.08	6.35	14	16.51	17.78	23	27.94	29.21	32	39.37	40.64
06	6.35	7.62	15	17.78	19.05	24	29.21	30.48	33	40.64	41.91
07	7.62	8.89	16	19.05	20.32	25	30.48	31.75			
08	8.89	10.16	17	20.32	21.59	26	31.75	33.02			
09	10.16	11.43	18	21.59	22.86	27	33.02	34.29			
10	11.43	12.70	19	22.86	24.13	28	34.29	35.56			