







REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		图面升级整理图面	2024.12.24	阿树



P.C.B Layout

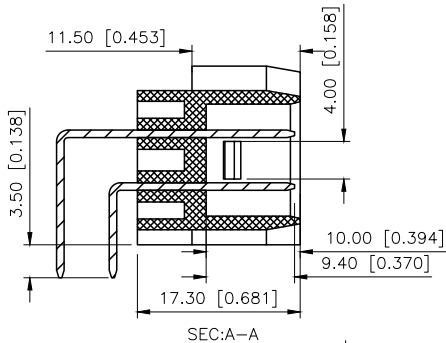

SEC:A-A

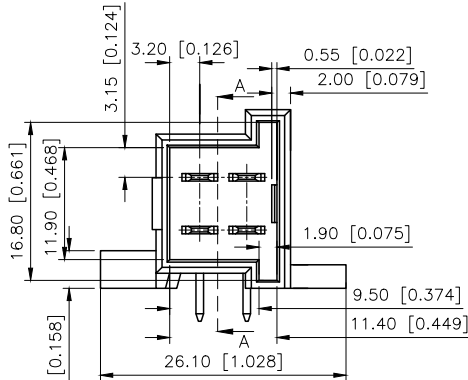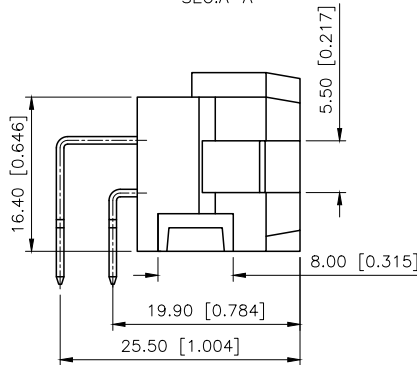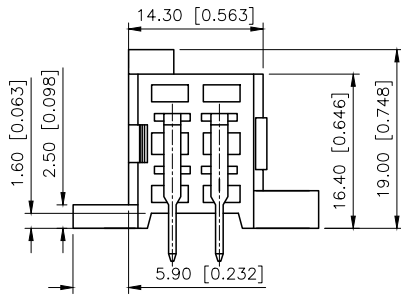
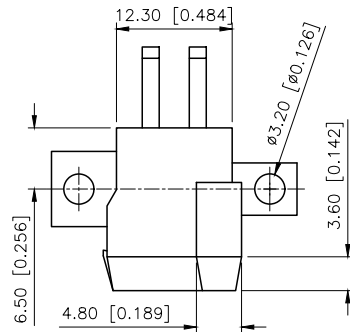


Current rating:25A AC/DC
额定电流: 25A AC/DC
Temperature range:-40℃--+125℃
温度范围: -40℃--+125℃

PART NO.:

K 828801 W R-2x02-PT SN
① ② ③ ④ ⑤ ⑥ ⑦

- ①K:XKBTEK-Car Connector
②XKB Series No
③Category:W-Wafer
④Welding Board Range:R-Straight 90°
⑤Row No.Pin No:2x02 Pin
⑥Material:PT-PBT+GF15+VO
⑦Palting:SN-Plated Tin

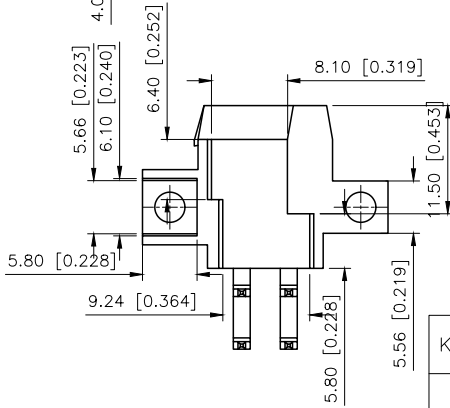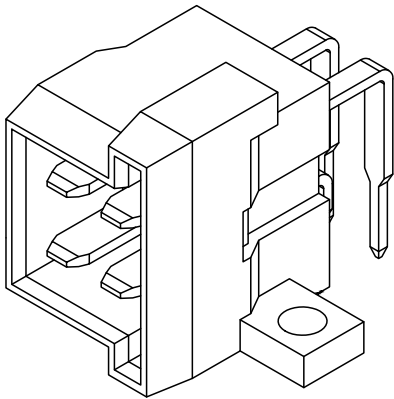

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERAUCES	



K828801WR-2x02-PTS		PBT	Brass	K828801H
PART NO		Material	Material(Pin)	Suitable XKB Housing
DESIGN	阿树	VIEW:	MODEL TYPE: 5.00mm Automobile connector	
CHECKED		UNIT: mm/in	PART NO.: K828801WR-2x02-PTS	
APPROVED		SIZE: A4	DWG NO.:	
SCALE			PAGE	REVISION
N/A			1/1	A1