

Single Inverter Buffer/Driver With Open-Drain Output

Description



This single inverter buffer and driver is designed for 1.65-V to 5.5-V VCC operation.

The output of the SN74LVC1G06 device is open drain and can be connected to other open-drain outputs to implement active-low wired-OR or active high wired-AND functions. The maximum sink current is 32 mA.

Features

- Supports 5V V_{CC} operation
- Input and Open-Drain Output accept voltages to 5.5V
- Low power consumption, 10μA max I_{CC}
- ±24mA output drive at 3.3V for open-drain devices
- I_{off} supports partial-power-down mode Operation and Back-Drive Protection

DEVICE SUMMARY, PIN AND PACKAGES

PIN DESCRIPTION	MARKING
 SOT23-5	
PIN DESCRIPTION	MARKING
 SC70-5	

PIN No. DBV/DCK	NAME	I/O	FUNCTION
1	NC		No Connected
2	A	I	Input
3	GND		Ground
4	Y	O	Output
5	VCC		Supply Voltage

ORDER INFORMATION

ORDERING NUMBER	PACKAGE	PACKING OPTION
SN74LVC1G06DBVR	SOT23-5	3000PCS
SN74LVC1G06DCKR	SC70-5	3000PCS

Logic Diagram




Figure 3.1: SN74LVC1G06 Logic Diagram

Function Table

Input	Output
A	Y
1	0
0	Hi-Z

1=High State, 0=Low State

Absolute Maximum Ratings

Symbol	Parameter	MIN	MAX	Unit
V_{CC}	Supply Voltage	-0.5	6.5	V
V_I	Input Voltage Range	-0.5	6.5	V
V_O	Voltage Range(applied to any output in the high-impedance or power-off state) ⁽¹⁾	-0.5	6.5	V
	Voltage Range(applied to any output in the high or low state)	-0.5	$V_{CC} + 0.5$	V
I_O	Continuous Output Current		± 50	mA
T_J	Junction Temperature		125	°C
T_{OP}	Operating Temperature	0	70	°C

Absolute maximum ratings are those values beyond which the device could be permanently damaged. These are stress ratings only, which do not imply functional operation of the device at these or any other conditions beyond those indicated under normal operating conditions.

(1) The input and output negative-voltage ratings may be exceeded if the input and output current ratings are observed.

Electrical Characteristics

DC Specifications

($T_a = 25^\circ\text{C}$, voltages are referenced to GND (ground=0V), All typical values are at $V_{CC} = 3.3\text{V}$, unless otherwise specified)

Symbol	Parameter	Test Condition	MIN	TYP	MAX	Unit
V_{IH}	High Level Input Voltage	$V_{CC} = 1.65\text{V to } 1.95\text{V}$	$0.65V_{CC}$	--	--	V
		$V_{CC} = 2.3\text{V to } 2.7\text{V}$	1.7	--	--	V
		$V_{CC} = 2\text{V to } 5.5\text{V}$	$0.7V_{CC}$	--	--	V
V_{IL}	Low Level Input Voltage	$V_{CC} = 1.65\text{V to } 1.95\text{V}$	--	--	$0.35V_{CC}$	V
		$V_{CC} = 2.3\text{V to } 2.7\text{V}$	--	--	0.7	V
		$V_{CC} = 3\text{V to } 3.6\text{V}$	--	--	0.8	V
		$V_{CC} = 4.5\text{V to } 5.5\text{V}$	--	--	$0.3V_{CC}$	V
I_{OL}	Low Level Output Current	$V_{CC} = 1.65\text{V}$	--	--	4	mA
		$V_{CC} = 2.3\text{V}$	--	--	8	mA
		$V_{CC} = 3\text{V}$	--	--	16	mA
			--	--	24	mA
		$V_{CC} = 4.5\text{V}$	--	--	32	mA

Symbol	Parameter	Test Condition	MIN	TYP	MAX	Unit
V_{OL}	Low Level Output Voltage	$V_{CC}=1.65V$ to $5.5V, I_{OL}=100\mu A$	--	--	0.1	V
		$V_{CC}=1.65V, I_{OL}=4mA$	--	0.09	--	V
		$V_{CC}=2.3V, I_{OL}=8mA$	--	0.1	--	V
		$V_{CC}=3V, I_{OL}=16mA$	--	0.15	--	V
		$V_{CC}=3V, I_{OL}=24mA$	--	0.25	--	V
		$V_{CC}=4.5V, I_{OL}=32mA$	--	0.25	--	V
I_I	A Input Leakage Current	$V_{CC}=0$ to $5.5V, V_I=V_{CC}$ or GND	--	0	± 1	μA
I_{off}	Power Off Leakage Current	$V_{CC}=0V, V_I$ or $V_O=5.5V$	--	0	± 10	μA
I_{CC}	Quiescent Supply Current	$V_{CC}=1.65V$ to $5.5V, V_I=V_{CC}$ or GND, $I_O=0$	--	0	10	μA
ΔI_{CC}	Additional Quiescent Supply Current Per Input Pin	$V_{CC}=3V$ to $5.5V$, one input at $V_{CC}-0.6V$, other inputs at V_{CC} or GND	--	--	500	μA

Application Information


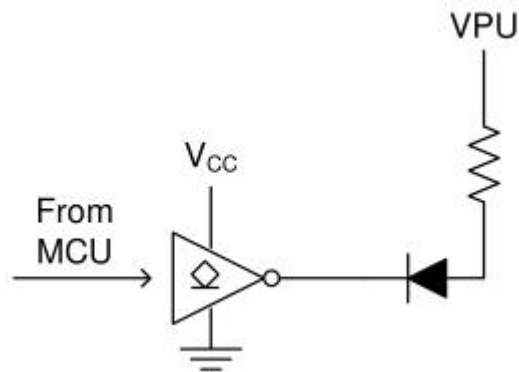



Figure 5.1: Application Schematic

PACKAGE DESCRIPTION

SOT-23-5

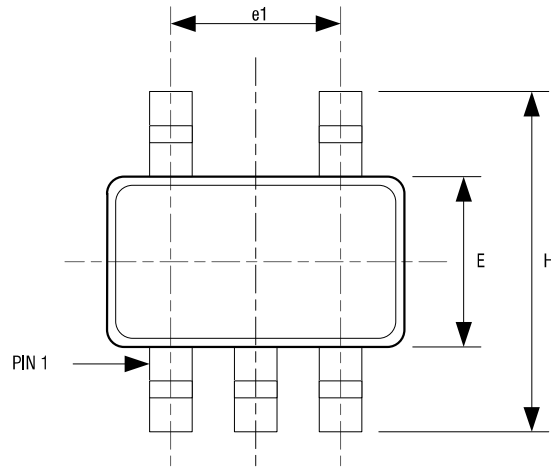


TOP VIEW

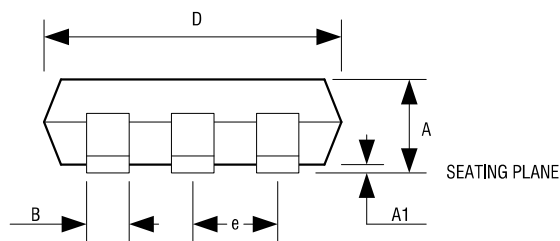

FRONT VIEW

5LD SOT-23 PACKAGE OUTLINE DIMENSIONS


Dimension	Min.	Max.
A	1.05	1.35
A1	0.04	.15
B	0.3	0.5
C	0.09	0.2
D	2.8	3.0
H	2.5	3.1
E	1.5	1.7
e	0.95 REF.	
e1	1.90 REF.	
L1	0.2	0.55
L	0.35	0.8
Q	0°	10°

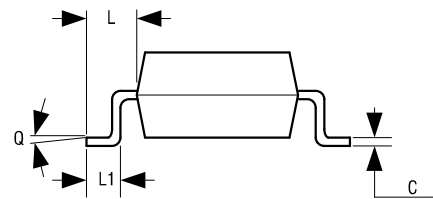

SIDE VIEW

NOTE:

- 1.DIMENSIONS ARE IN MILLIMETERS
- 2.DRAWING NOT TO SCALE
- 3.DIMENSIONS ARE INCLUSIVE OF PLATING
- 4.DIMENSIONS ARE EXCLUSIVE OF MOLD FLASH AND METAL BURR

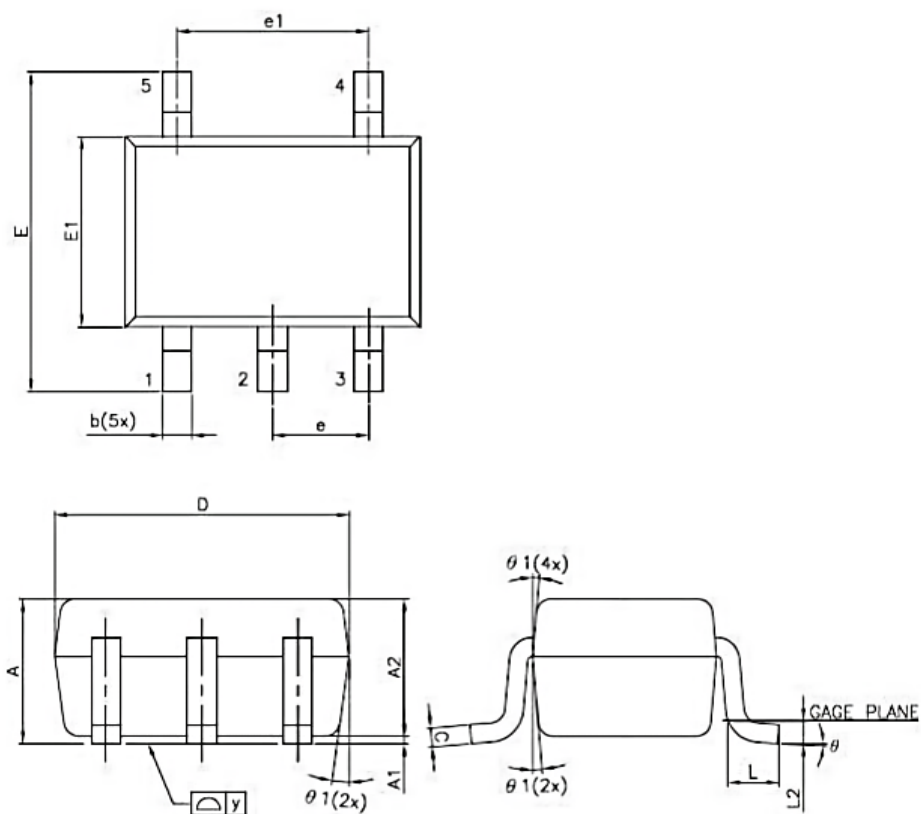

Symbol	Dim in mm		
	MIN	TYP	MAX
A	0.90	1.00	1.10
A1	0.00	0.05	0.10
A2	0.90	0.95	1.00
b	0.15	0.25	0.35
C	0.10	0.12	0.15
D	1.80	2.00	2.20
E	2.15	2.25	2.35
E1	1.15	1.25	1.35
e	0.650TYP.		
e1	1.20	1.30	1.40
L	0.25	0.30	0.40
L2	0.15TYP.		
Y	0.00	0.05	0.10
θ	4°	8°	12°