

标 记
MARKECN编号/变更内容
ECN NO/DEFINITION修 改
REVISE日 期
DATE核 准
APPROVE

A

B

C

D

E

F

G

A

B




C

D

E

F

G

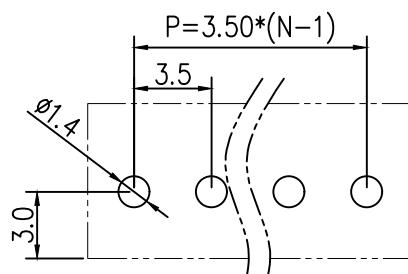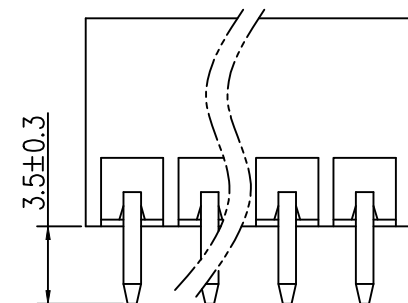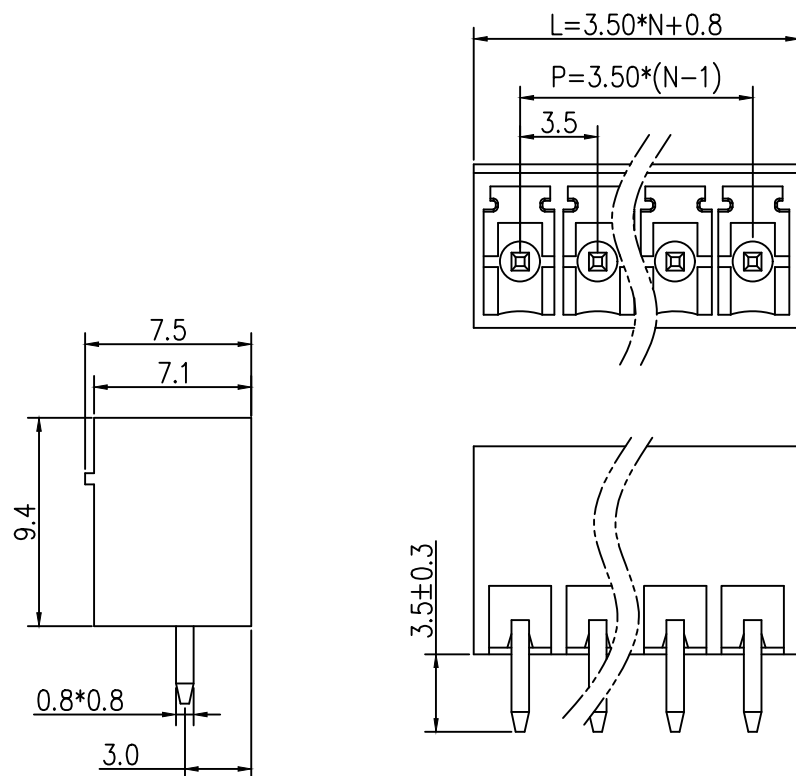

PCB LAYOUT

Materials and Electroplating

- ①. Plastic body: PA66,
- ②. Solder pin: copper, Nickel tin plating

Electrical performance

Rated voltage: 300V

Rated current: 8A

Contact resistance: 20m Ω (Max)

Insulation resistance: 500M Ω \ DC500V

Voltage endurance: AC1500V \ 1Min

mechanical properties

Temperature range: -40 °C~+105 °C

Instantaneous temperature: +250 °C, 5 seconds

2	插针	铜	镀镍锡	
1	基座	PA66	绿色	
序号	品名	材质	电镀/颜色	备注



深圳市虹成电子有限公司

品名 TITLE	接线端子
料号 PART NO	HC-JXDZVC-3.5-12P

GENERAL TOLERANCES
(UNLESS SPECIFIED)比 例
SCALE

1:1



公差参数	公差	公差
2-6P	±0.10	±0.20
7-12P	±0.20	±0.30
13-18P	±0.25	±0.40
19-24P	±0.30	±0.50

张数 PART NO	1 OF 1
版本 REV	A

单位 UNIT	MM
制图 DRAW	AhYe
审核 CHECKED	夏操云
批准 APPROVE	赵亮亮

张数 PART NO	1 OF 1
版本 REV	A

制图 DRAW	AhYe
审核 CHECKED	夏操云
批准 APPROVE	赵亮亮

制图 DRAW	AhYe
审核 CHECKED	夏操云
批准 APPROVE	赵亮亮

制图 DRAW	AhYe
审核 CHECKED	夏操云
批准 APPROVE	赵亮亮

制图 DRAW	AhYe
审核 CHECKED	夏操云
批准 APPROVE	赵亮亮