

Pitch:2.00x2.00mm(0.079 " x0.079 ")
Pin Header Dual Rows With Post S.M.T Type

ELETE
—Professional Connecting Solution—
HMLDMXX Series

Specifications

Current Rating:2.0 Ampere
Insulation Resistance:1000MΩ Min
Dielectric Withstanding:500V AC
Contact Resistance:20mΩ Max
Operating Temperature:-40℃ to +105℃

Materials


Contact Material: Brass
Insulation Material: Polyester,UL 94V-0
LCP/NL6T

All material RoHS&Reach Compliant
Halogen-free is available


Mating with




HFLDSXX






HFLDR63




HFLDM63



HFLDS72

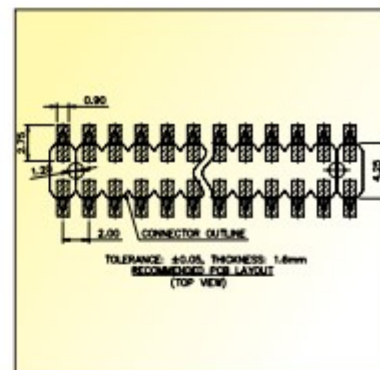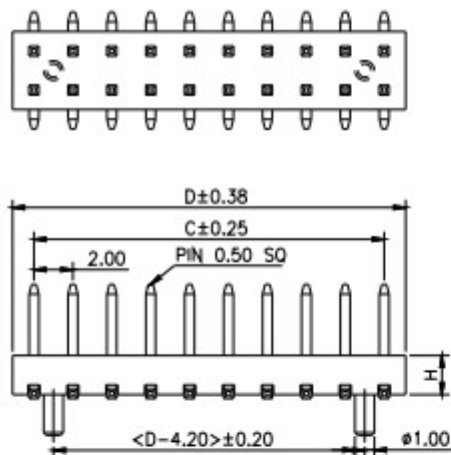

HFLDP63



HFLDR72



HFLDM51



HFLDR51



HFLDS72

No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information	
	C	D		C	D		C	D		C	D
03	4.00	6.20	13	24.00	26.20	23	44.00	46.20	33	64.00	66.20
04	6.00	8.20	14	26.00	28.20	24	46.00	48.20	34	66.00	68.20
05	8.00	10.20	15	28.00	30.20	25	48.00	50.20	35	68.00	70.20
06	10.00	12.20	16	30.00	32.20	26	50.00	52.20	36	70.00	72.20
07	12.00	14.20	17	32.00	34.20	27	52.00	54.20	37	72.00	74.20
08	14.00	16.20	18	34.00	36.20	28	54.00	56.20	38	74.00	76.20
09	16.00	18.20	19	36.00	38.20	29	56.00	58.20	39	76.00	78.20
10	18.00	20.20	20	38.00	40.20	30	58.00	60.20	40	78.00	80.20
11	20.00	22.20	21	40.00	42.20	31	60.00	62.20			
12	22.00	24.20	22	42.00	44.20	32	62.00	64.20			