


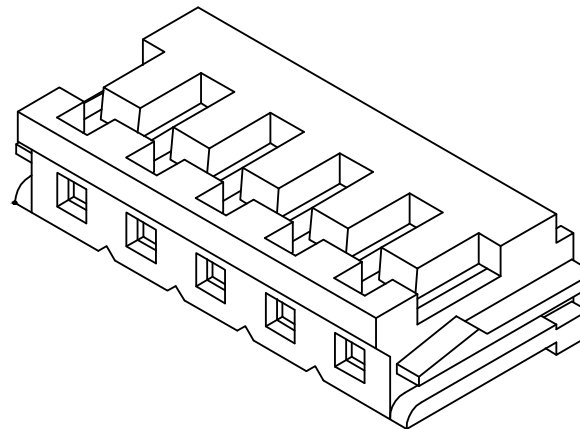

Specifications:

规格:

Voltage rating:250V AC/DC

额定电压: 250V AC/DC

Current rating:3A AC/DC

额定电流: 3A AC/DC

Withstanding voltage:800V AC/minute

耐受电压: 800V AC/分钟

Temperature range:-40°C-+85°C

温度范围: -40°C ~ $+85^{\circ}\text{C}$

Insulation resistance:1000MΩ min

绝缘电阻: 1000MΩ Min

Contact resistance:10mΩ Max

接触电阻: 10mΩ Max

X2581 H - 05 - N0

①

②

③


④

1.Series No

2.Category:H-Housing

3.Row No.Pin No:XX-02~15 Pin

4.Material:N0-PA66 UL94V-0

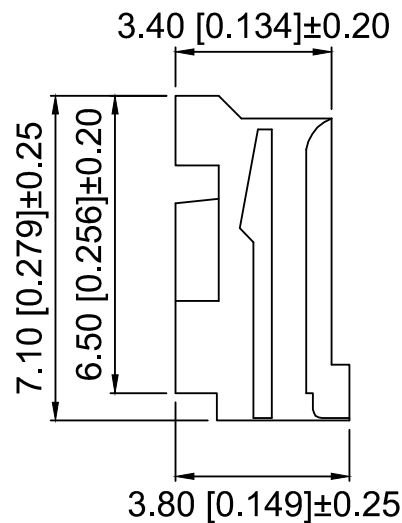

Poles	Dimensions(mm)		Poles	Dimensions(mm)	
	A	B		A	B
02	2.50	7.00	09	20.00	24.50
03	5.00	9.50	10	22.50	27.00
04	7.50	12.00	11	25.00	29.50
05	10.00	14.50	12	27.50	32.00
06	12.50	17.00	13	30.00	34.50
07	15.00	19.50	14	32.50	37.00
08	17.50	22.00	15	35.00	39.50

X2581H-05-N0	PA66	X2581W	X2581T
PART NO	Material	Suitable XKB Wafer	Suitable XKB Terminal

DSND		SCALE: N/A	MODEL TYPE: 2.5mm Crimp Style Connector		
DWN		VIEW: 	PART NO.: X2581H-05-N0		
CHKD		UNIT: mm/in	DWG NO.: X-X2581H-05-N0		
APPD		SIZE: A4			
PRECISION CO.,LIMITED			WEIGHT	SHEET 1/1	REVISION A0

					ANGLAR	±5°
ΔX					L ≤ 4	±0.2
ΔX					4 < L ≤ 16	±0.3
ΔX					16 < L ≤ 63	±0.4
MARK	DESCRIPTION	DATE	REVISED	APPROVED	L > 63	±0.5
REVISIONS					UNSPECIFIED TOLERANCES	
www.helloxkb.com www.helloxkb.cn www.xk-da.cn						

XKLE

XKB INDUSTRIAL PRECISION CO.,LIMITED