


Kinghelm®

REVISIONS					
REV	NUMBER	DESCRIPTION	DWN	CHK	DATE
A		DESIGN	James		9/26

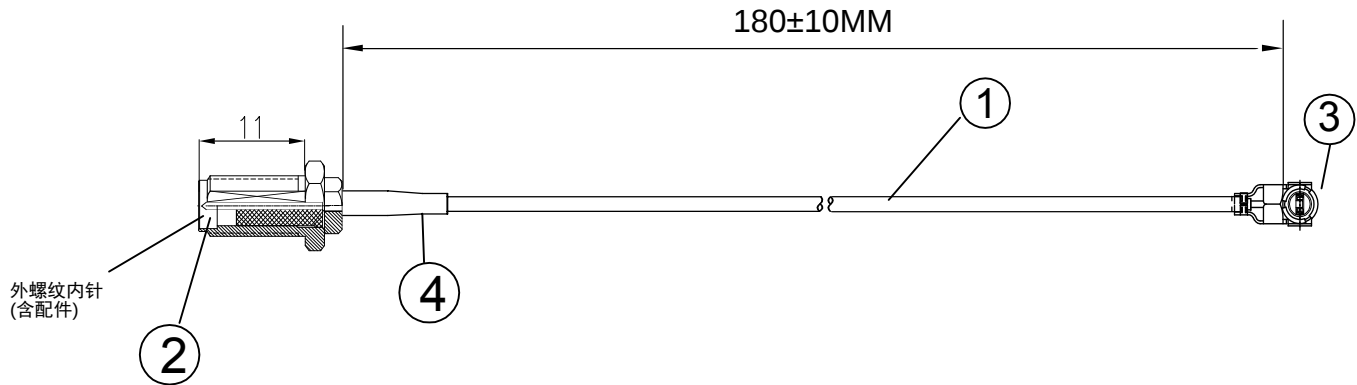


NOTES:

1. ELECTRICAL:
- 1.1. VOLTAGE RATING:DCV 300V 10MS
 - 1.2. CONDUCTANCE RESISTANCE: 3.0 OHM/MAX.
 - 1.3. INSULATION RESISTANCE: 5.0M OHM/MIN.
 - 1.4. THE CABLE SHOULD BE 100% ELECTRICAL TEST
 - 1.5. IT SHOULD BE NO ANY OPEN/SHORT, MISWIRING AND INTERMITTENT FAILURES.
2. MATERIAL:
- 2.1. SEE TABLE
3. ALL COMPONENTS ARE RoHS COMPLIANT.

ITEM NO.	PART NUMBER	DESCRIPTION	QTY.
④	套管	OD:2.5* 15 mm	2
③	接头	国产一代IPEX端子, 镀金	1
②	接头	SMA 母头公针(反极性), 牙长11mm,镀金	1
①	同轴线	RF0.81黑色线 , OD:0.81MM	AS

深圳市金航标电子有限公司

SHENZHEN KINGHELM ELECTRONIC CO.,LTD.

ALL DIMENSION ARE IN MM	DRAWN James	DATE	KH-RPSMAK-IPEX-RG0.81-B180MM			
	CHKD. Frank					
	APPD. Scott					
COMPUTER GENERATED IN SOLIDWORKS						
DO NOT SCALE THIS DRAWING						
PROJECTION 	GENERAL TOLERANCE FOR ANGLES X.X X.XX X.XXX ±1° ±0.3 ±0.25 ±0.150		SIZE	DWG Number.		REV
			B			A
		SCALE: Free		TYPE	SHEET 1	OF 1

CUSTOMER P/N: