

Pitch: 1.27x2.54mm(0.05" x0.1")
 Female Header Dual Rows S.M.T Type




Specifications

Current Rating: 1.0 Ampere
 Insulation Resistance: 1000MΩ Min
 Dielectric Withstanding: 300V AC
 Contact Resistance: 20mΩ Max
 Operating Temperature: -40°C to +105°C

Materials




Contact Material: Phosphor Bronze
 Insulation Material: Polyester, UL 94V-0
 LCP/NL6T

All material RoHS&Reach Compliant
 Halogen-free is available

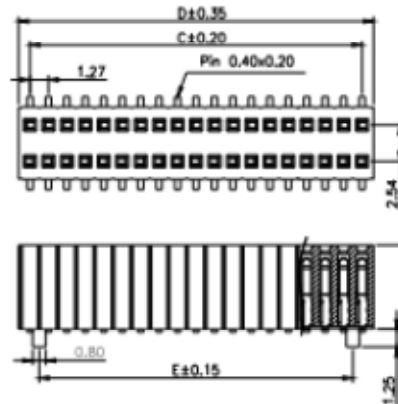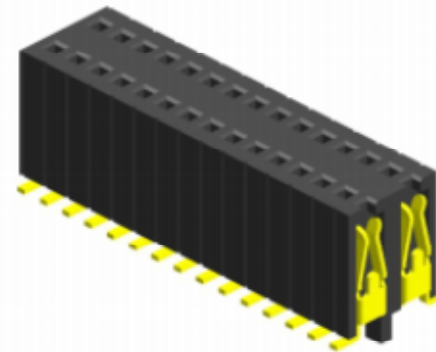

PS: Suggested Mating Pin Length: 2.7~5.5mm

Mating with



No. of Pins/Row	Dimension Information			No. of Pins/Row	Dimension Information			No. of Pins/Row	Dimension Information		
	C	D	E		C	D	E		C	D	E
03	2.54	4.11	1.27	19	22.86	24.43	21.59	35	43.18	44.75	41.91
04	3.81	5.38	2.54	20	24.13	25.70	22.86	36	44.45	46.02	43.18
05	5.08	6.65	3.81	21	25.40	26.97	24.13	37	45.72	47.29	44.45
06	6.35	7.92	5.08	22	26.67	28.24	25.40	38	46.99	48.56	45.72
07	7.62	9.19	6.35	23	27.94	29.51	26.67	39	48.26	49.83	46.99
08	8.89	10.46	7.62	24	29.21	30.78	27.94	40	49.53	51.10	48.26
09	10.16	11.73	8.89	25	30.48	32.05	29.21	41	50.80	52.37	49.53
10	11.43	13.00	10.16	26	31.75	33.32	30.48	42	52.07	53.64	50.80
11	12.70	14.27	11.43	27	33.02	34.59	31.75	43	53.34	54.91	52.07
12	13.97	15.54	12.70	28	34.29	35.86	33.02	44	54.61	56.18	53.34
13	15.24	16.81	13.97	29	35.56	37.13	34.29	45	55.88	57.45	54.61
14	16.51	18.08	15.24	30	36.83	38.40	35.56	46	57.15	58.72	55.88
15	17.78	19.35	16.51	31	38.10	39.67	36.83	47	58.42	59.99	57.15
16	19.05	20.62	17.78	32	39.37	40.94	38.10	48	59.69	61.26	58.42
17	20.32	21.89	19.05	33	40.64	42.21	39.37	49	60.96	62.53	59.69
18	21.59	23.16	20.32	34	41.91	43.48	40.64	50	62.23	63.80	60.96