

| REVISIONS |         |          |                            |            |        |
|-----------|---------|----------|----------------------------|------------|--------|
| REV.      | ECN NO. | LOCATION | DESCRIPTION                | DATE       | DESIGN |
| A0        | N/A     |          | INITIAL RELEASE            | /          | /      |
| A1        | N/A     | ①X6      | 增加对插引导弧度管控, 修改尺寸, 图面升级整理图面 | 2025.07.09 | 阿树     |

Specifications:  
规格:  
Voltage rating:50V AC/DC  
额定电压: 50V AC/DC  
Current rating:1A AC/DC  
额定电流: 1A AC/DC  
Withstanding voltage:250V AC/minute  
耐受电压: 250V AC/分钟  
Temperature range:-40℃-+125℃  
温度范围: -40℃-+125℃  
Insulation resistance:≥100MΩ MIN  
绝缘电阻: ≥100MΩ  
Contact resistance:20mΩ MAX  
接触电阻: ≤20mΩ  
Applicable wire Range:AWG#28-#32  
使用线范围: AWG #28-#32

PART NO.:  
X1004 I-P SN-A  
① ② ③ ④ ⑤

- ①Series Number.  
②Category: T-terminal  
③Material:P-Phosphor bronze  
④Plating Style: V01-All Gold Flash  
SN-Bright tin Plating 80u";  
120u" Over Nickel  
⑤Type: Type A


|              |                  |                       |                     |
|--------------|------------------|-----------------------|---------------------|
| X1004T-PSN-A | Phosephor Bronze | X1004T-L              | X1004H-L            |
| PART NO      | Material         | Suitable SWB Terminal | SuitableXKB Housing |

MODEL TYPE:  
2.54mm Crimp Style Connector

PART NO.:  
X1004T-PSN-A

DWG NO.:  
X-X1004T-PSN-A

| SCALE | PAGE | REVISION |
|-------|------|----------|
| N/A   | 1/1  | A1       |

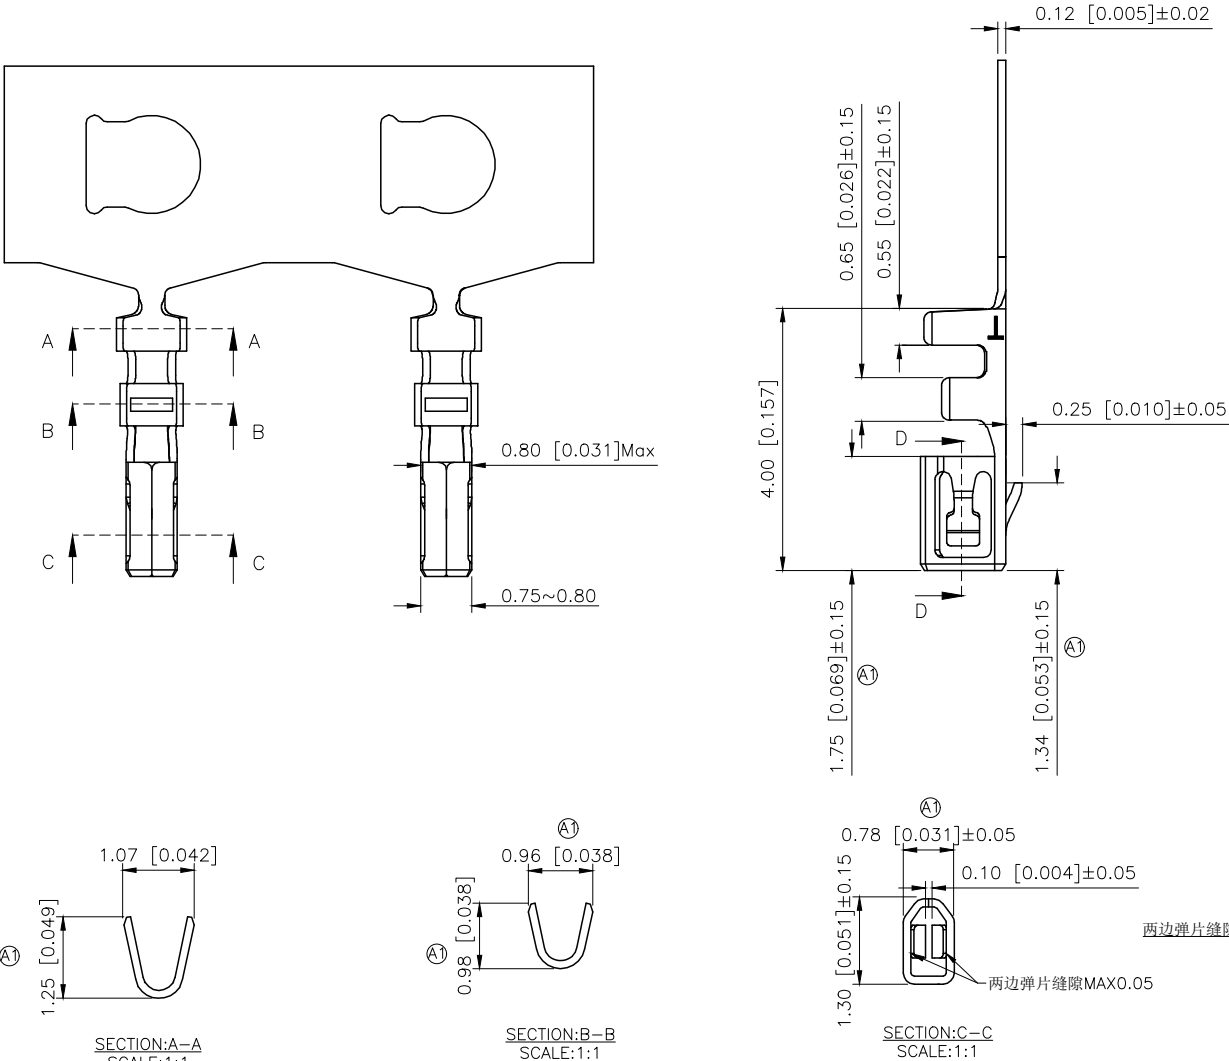

|                        |       |
|------------------------|-------|
| AuGLAR                 | ±5°   |
| X.                     | ±0.40 |
| X.x                    | ±0.30 |
| X.xx                   | ±0.20 |
| X.xxx                  | ±0.15 |
| UNSPECIFIED TOLERAUCES |       |



DESIGN  
CHECKED  
APPROVED

阿树

VIEW:

UNIT: mm/in

SIZE: A4

XKB INDUSTRIAL PRECISION CO.,LIMITED