

## SHC1022 -- Cord Connectors




Machined  
Aluminum

Hubbell offers a full line of machined aluminum cord connectors in N.P.T. hub sizes  $\frac{1}{4}$ " through 1" and cast aluminum 1" to 3". They provide durable performance and a clean attractive look without adding unwanted weight.

### Product Specifications

|                                        |                                                                                                                                                                                                          |
|----------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Product Type</b>                    | Cord Connectors                                                                                                                                                                                          |
| <b>Material/Style</b>                  | Aluminum                                                                                                                                                                                                 |
| <b>Cord Diameter Range</b>             | .25" - .38" (6.3- .9.7)                                                                                                                                                                                  |
| <b>Cord Connector Body Style</b>       | Straight Male                                                                                                                                                                                            |
| <b>Form Size</b>                       | F2                                                                                                                                                                                                       |
| <b>HUB Size</b>                        | 1/2"                                                                                                                                                                                                     |
| <b>Color Code</b>                      | White                                                                                                                                                                                                    |
| <b>Effective Operating Temperature</b> | -30°F to +225°F (34°C to +107°C)                                                                                                                                                                         |
| <b>Recommended Knockout Hole Size</b>  | .86" - .91" (21.8-23.0)                                                                                                                                                                                  |
| <b>Flammability</b>                    | Hubbell nylon cord connectors have a UL 94-V2 rating.                                                                                                                                                    |
| <b>Hazardous Locations</b>             | Hubbell cord connectors are suitable for use in hazardous locations per Class I Div. 2, Class II Div. 1 & 2, Class III Div. 1 & 2 N.E.C. Reference 501-4(b), 502-4(a), 502-4(b), 503-3(a), and 503-3(b). |
| <b>Dimension A</b>                     | 1.13" (28.7) Dia.                                                                                                                                                                                        |
| <b>Dimension B</b>                     | 1.10" (27.9) Ref.                                                                                                                                                                                        |
| <b>Dimension C</b>                     | .55" (14.0)                                                                                                                                                                                              |
| <b>Dimension D</b>                     | .64" (16.3) Throat Dia.                                                                                                                                                                                  |
| <b>Dimension E A/C</b>                 | 1.11" (28.2)                                                                                                                                                                                             |
| <b>Dimension E A/F</b>                 | 1.00" (25.4)                                                                                                                                                                                             |
| <b>Certifications</b>                  | UL Listed in accordance with Standard 514B, CSA Certified, United States Coast Guard Approval, Title 46-Part 111.                                                                                        |
| <b>M Drawings</b>                      | <a href="#">Click here for M-Drawing</a>                                                                                                                                                                 |

|                        |                                                 |
|------------------------|-------------------------------------------------|
| <b>Catalog Page</b>    | <a href="#">Click here for catalog page T76</a> |
| <b>Hubbellnet</b>      | <a href="#">Click here for Hubbellnet</a>       |
| <b>Catalog Section</b> | <a href="#">Click here for Section-T</a>        |
| <b>UPC Number</b>      | 78358520022                                     |
| <b>Weight in LBs</b>   | 0.15                                            |

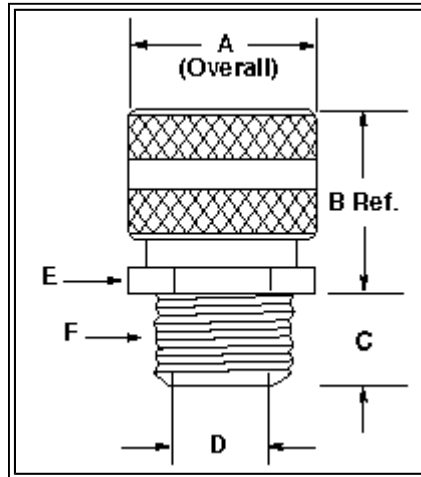

Hubbell Incorporated (Delaware)  
 185 Plains Road  
 Milford, CT 06460-2420  
 Ph: (203) 882-4800  
 Fax: (800) 255-1031

