
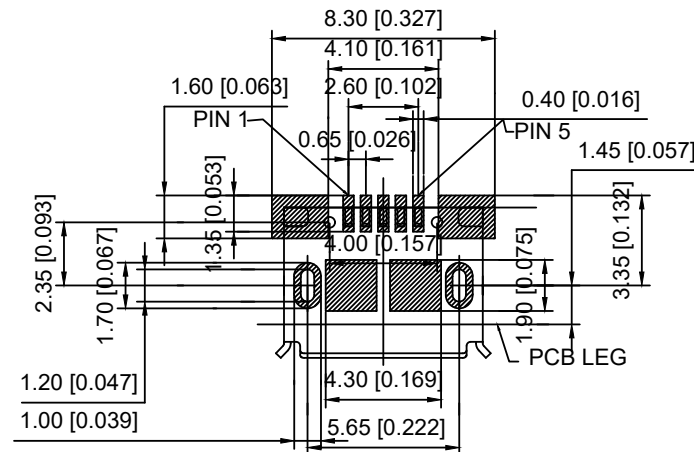
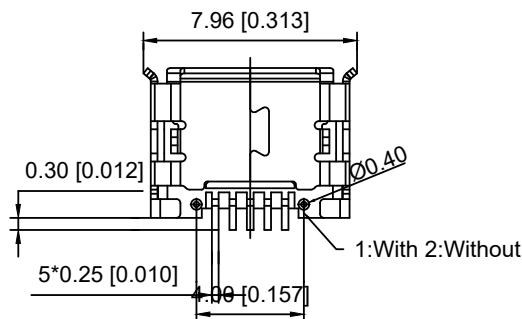
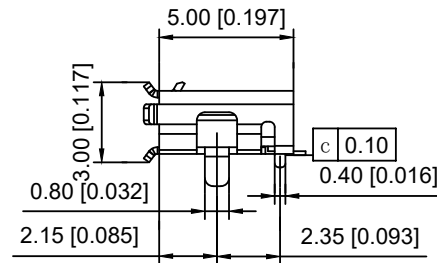
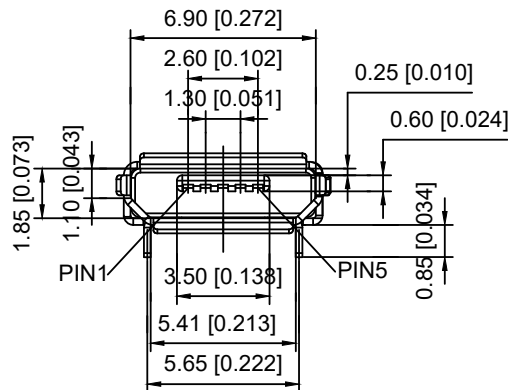



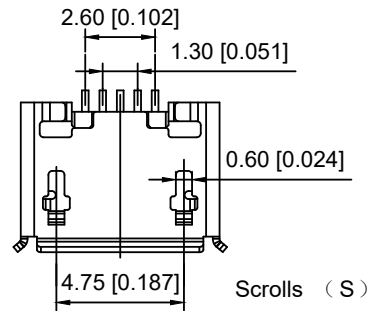

RECOMMENDED P.C.B. LAYOUT
TOP VIEW (TOLRANCE: ± 0.05)

Material

Housing Material: LCP, UL94V-0, black

Contact Terminal: Copper Alloy

Metallic Shell: Sus

Electrical

Voltage Rating: 30 V AC

Current Rating: Signal (Pins 2,3,4): 1.0A, Power (Pins 1,5): 1.8A

Contact Resistance: 30m Ω Max

Insulation resistance: 1000M Ω Min

Dielectric withstanding voltage: 250V AC/Minute

Mechanical

Durability: 10,000 cycles

Mating Force: 35N (3.57Kgf) Max

Unmating Force: 8N (0.82Kgf) Min.

U254-051T-4BH83-F2S

1:AU 1U"
6:AU 30U"
T:TIN
N:NICKEL

S:Sus
1:With 2:Without
S:Scrolls F:Flat

MARK	DESCRIPTION	DATE	REVISED	APPROVED	UNSPECIFIED TOLERANCES
Δx					ANGULAR $\pm 5^\circ$
Δx					$L \leq 4$ ± 0.2
Δx					$4 < L \leq 16$ ± 0.3
Δx					$16 < L \leq 63$ ± 0.4
					$L > 63$ ± 0.5
REVISIONS					
www.helloxkb.com www.helloxkb.cn www.xk-dg.cn					

XKB

XKB INDUSTRIAL PRECISION CO.,LIMITED

DSND		SCALE: N/A	MODEL TYPE: MICRO USB
DWN		VIEW:	PART NO.: U254-051T-4BH83-F2S
CHKD		UNIT: mm/in	DWG NO.: U254-051T-4BH83-F2S
APPD		SIZE: A4	WEIGHT SHEET REVISION
			1/1 A0