

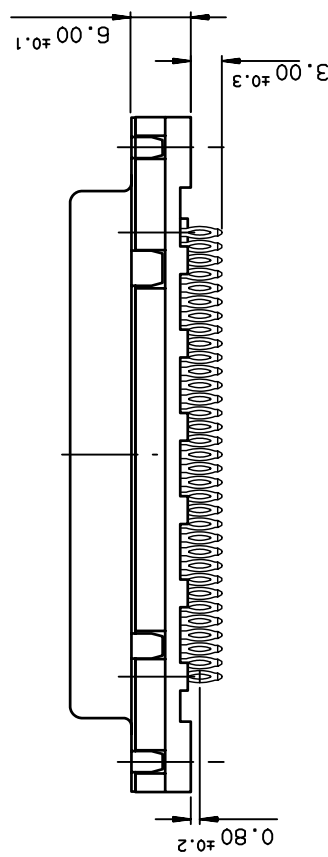


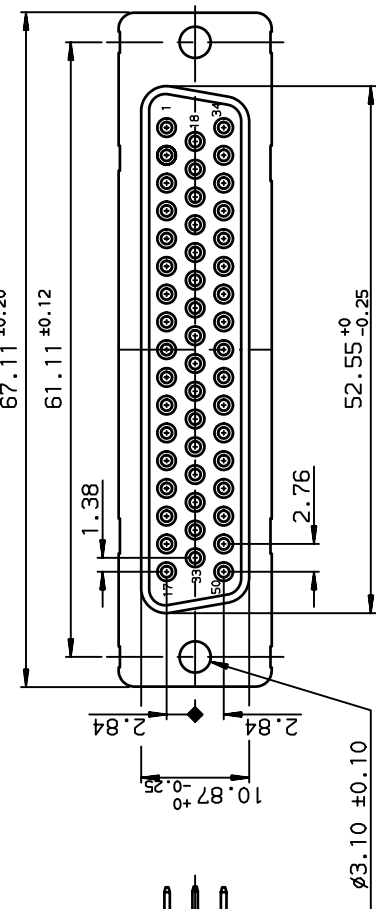

PC board drilling dimensions
(after plating - thickness: 1.60 to 3.20 mm)

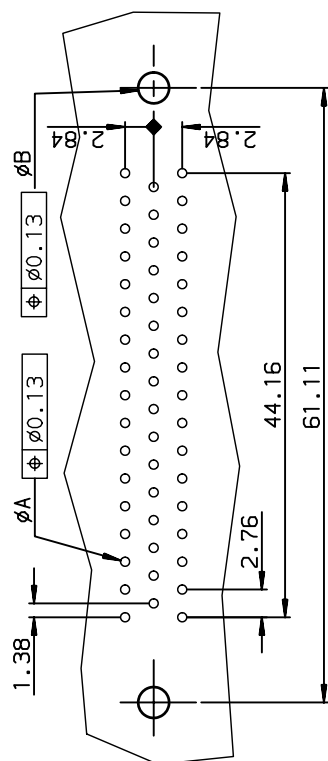

TIN LEAD PART NUMBER

PART NUMBER	
Flash gold	D50S91C4PA00
0.76µ gold	D50S91C6PA00

LEAD FREE PART NUMBER

PART NUMBER	
Flash gold	D50S91C4PA00LF
0.76µ gold	D50S91C6PA00LF

GENERAL CHARACTERISTICS AND ROHS INFORMATIONS:
SEE DRAWING C01-8646-0001

European Views

www.fciconnect.com		surface ISO 1302	tolerance std ISO 406 ISO 1101	projection	mm
		TOLERANCES UNLESS OTHERWISE SPECIFIED			
Dr	JARRY	1995/09/06	ANGULAR	size	Scale
Eng	PESSON	1995/09/06	LINEAR	±0.1	2
Chr	LEGARE	1995/09/06	0.XX	±0.1	
Appr	LEGARE	1995/09/06	0.XXX	±0.1	
		Product family		ECN	L506-0186
		D-SUB		Spec ref	-
FCI		FEMALE CONNECTOR DELTA D 50-EUROPE		Rev.	
straight press fit		C01-8646-0366		CUSTOMER sheet 1 of 1	
catalog no		-		E	

rev	ecn no	dr	date
B	-	JAR	1996/07/25
C	L505-004	MPE	2005/02/10
D	L506-0065	LGO	2006/06/28
E	L506-0186	LGO	2006/09/25
-	-	-	-
-	-	-	-
-	-	-	-