



	REVISIONS				
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		新增卡扣R角, 增强卡扣强度	2024.03.14	桑 葦

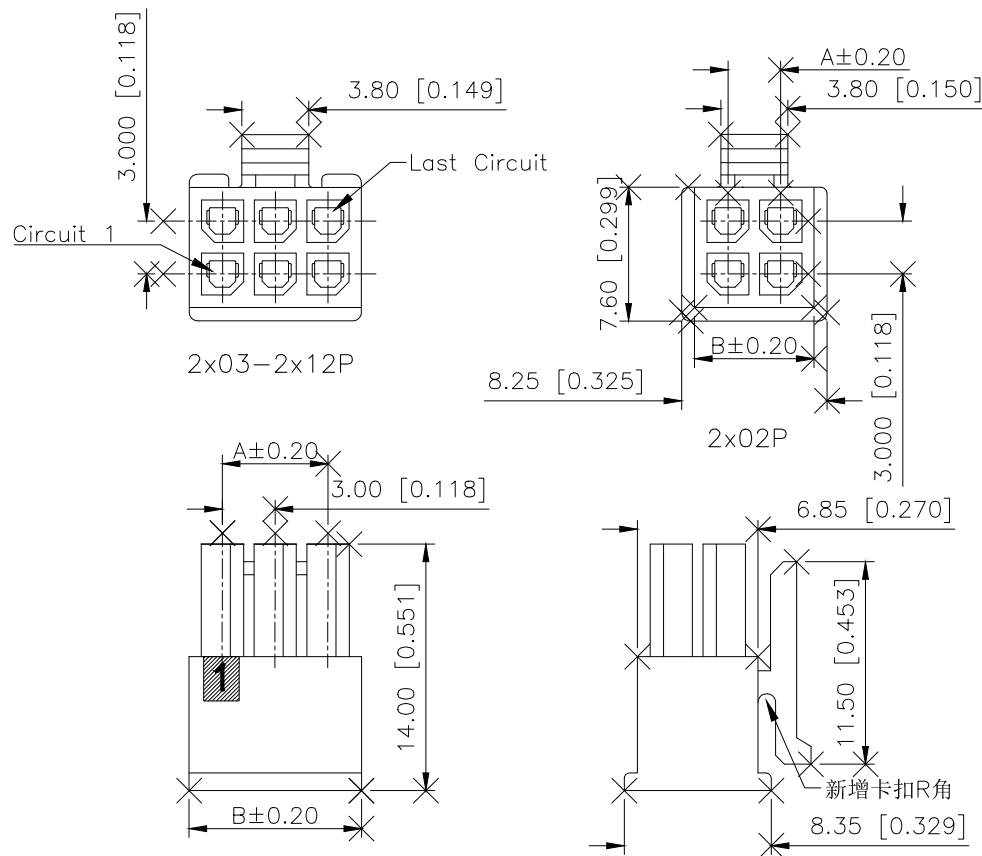

ANGLAR	$\pm 5^\circ$
X.	± 0.40
X.x	± 0.30
X.xx	± 0.20
X.xxx	± 0.15
UNSPECIFIED TOLERANCES	



Specifications (规格):

1. Voltage rating (额定电压): 250V AC DC
2. Current rating (额定电流): 5.0A AC/DC
3. Withstanding voltage (耐压值): $\geq 1500V$ AC/minute
4. Insulation resistance (绝缘电阻): $1000M\Omega$ Min
5. Contact resistance (接触电阻): $20m\Omega$ Max
6. Temperature range (使用温度): $-25^{\circ}C \sim +85^{\circ}C$

PART NO.:

$$\frac{X3025}{\textcircled{1}} \quad \frac{H}{\textcircled{2}} \quad \frac{M}{\textcircled{3}} - \frac{2 \times 12}{\textcircled{4}} \quad \frac{N2}{\textcircled{5}}$$

- ① Series No
- ② Category:H-Housing
- ③ Welding Board Angle:M-Male Housing
- ④ Row No-Pin: 2x01-2x12P
- ⑤ Material:N2-PA66, UL 94V-2, BLACK