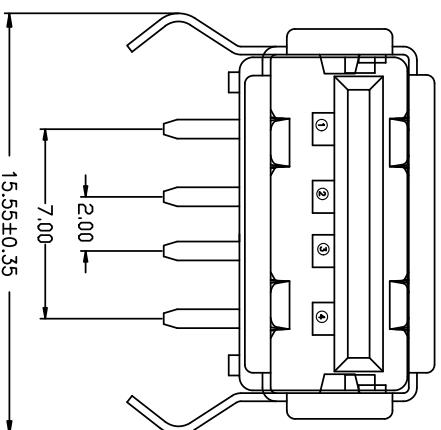


RBCOMMENDBD P.C.B PATBRN LAYD UT

- 电气特性:Electrical:
1. 额定电流: Current Rating
    1. 5A/contact terminal
  2. 额定电压: Voltage Rating
    - 30V DC
  3. 接触电阻:Contact Resistance
    - 30 milliohms MAX
  4. 耐电压:Dielectric Withstanding Voitage:
    - 500 V AC AT Sea Level
  5. 绝缘阻抗:Insulation Resistance:
    - 1000MEGA ohms MIN
- 物理性能:Mechanical:
1. 插拔力: Cnnector Mate and Ummate Force
    - Mate force:3.57kgf (MAX)
    - Ummate force:0.7kgf (MIN)
  2. 端子保持力: Terminal Retenion
    1. 0kgf (MIN)
  3. 寿命: 1500次
- 原材料:Matorial:
1. 塑胶:Housing:pbt
  2. 端子>Contact:Copper Alloy C2680
  3. 外壳:Shell:c2680
- 电镀:Finish:
1. 端子Contact: Au G/F u" Plated on contact area  
Tin50u" Plated on solder area
  2. 外壳Shell: Nickel 50u"Min plating over all.

深圳市精拓金电子有限公司

您正在使用 ZWCAD 2022 个人版, 不得用于商业用途, 详情请咨询 4007-102-588。