
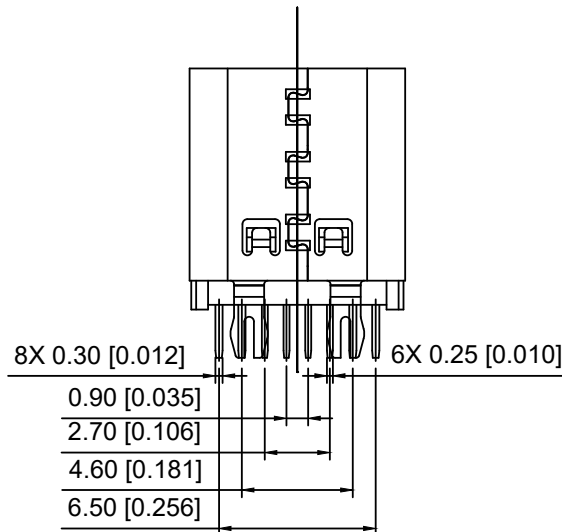
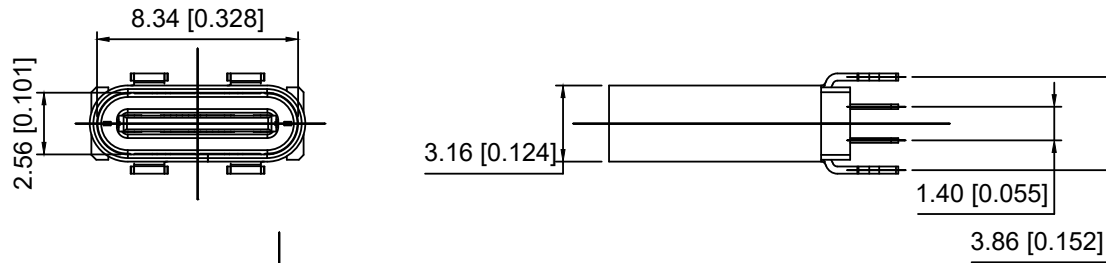


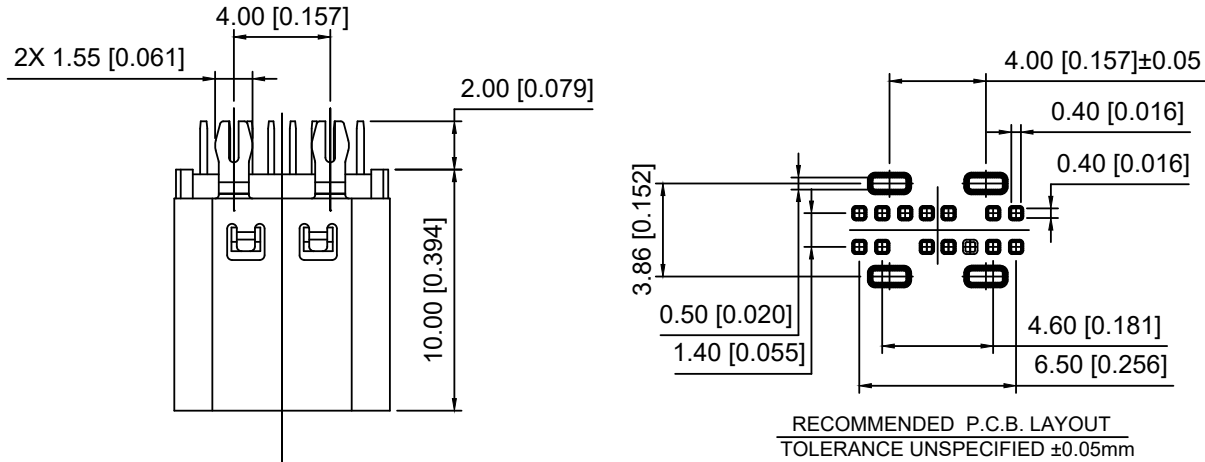

U263-141N-50QC14

1: Au 1U"
2: Au 3U"
5: Au 15U"
6: Au 30U"

B: Black W: White
O: Orange G: Green

备注:

1. 材质及电镀: 见附表1

2. 电气性能 EICTRICAL:

2.1 接触电阻 Contact impedance: 30mΩ Max FOR INITIAL.
40mΩ Max AFTER TEST.

2.2 耐电压 Withstand voltage: 100V AC

2.3 绝缘 Insulation impedance: 100MΩ Min

2.4 额定电流 Rated current:

COLLECTIVELY VBUS PIN (A4,A9,B4,B9) ,TOTAL 5A
VCCON PIN (B5) THROUGH GND PIN(A1,A12,B1,B12),1.25A

OTHERS PIN, 0.25A



2.5 工作温度 Operating temperature: -40°C ~ 85°C.

3. 机械性能:

3.1 插入力 Insertion force: 5~20N.

3.2 拔出力 Set the output: 初始值8~20N测试后6~20N

3.3 寿命 Service life: 10,000 CYCLES



A1	GND	B12	GND
A4	VBUS	B9	VBUS
A5	CC1	B7	DN2
A6	DP1	B6	DP2
A7	DN1	B5	CC2
A9	VBUS	B4	VBUS
A12	GND	B1	GND
PIN	SIGNAL NAME	PIN	SIGNAL NAME

05	外壳	不锈钢	1	SUS 304 1/2H,T0.30
04	二次Molding件	High temperature thermoplastic	1	UL94 V-0
03	一次Molding件	High temperature thermoplastic	1	UL94 V-0
02	中夹片	SUS301-H T=0.15	1	不电镀
01	端子	C18400-H T=0.20	1set	功能接触区镀金, 焊脚镀亮镍
序号	品名	材质	用量	备注

MARK	DESCRIPTION	DATE	REVISED	APPROVED	UNSPECIFIED TOLERANCES
Δx					ANGLAR ±5°
Δx					L ≤ 4 ±0.2
Δx					4 < L ≤ 16 ±0.3
Δx					16 < L ≤ 63 ±0.4
Δx					L > 63 ±0.5
MARK	DESCRIPTION	DATE	REVISED	APPROVED	UNSPECIFIED TOLERANCES
REVISIONS					
www.helloxkb.com www.helloxkb.cn www.xk-dg.cn					

DSND		SCALE: N/A	MODEL TYPE:
DWN		VIEW:	TYPE-C 3.1
CHKD		UNIT: mm/in	PART NO.: U263-141N-50QC14
APPD		SIZE: A4	DWG NO.: X-U263-141N-50QC14
XKB INDUSTRIAL PRECISION CO., LIMITED			WEIGHT
			SHEET
			REVISION
			1/1
			A0