
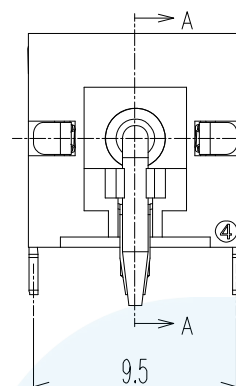
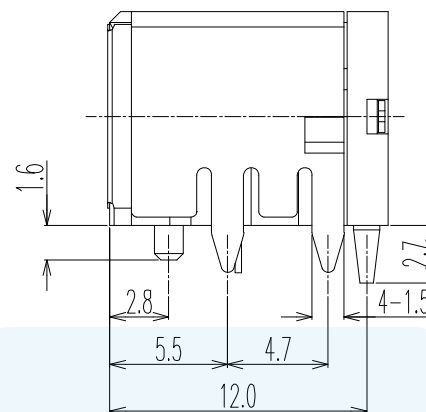


ZONE	ECN.NO.	DESCRIPTION	DRAWING	DATE
A		INITIAL	林生财	2023.06.19

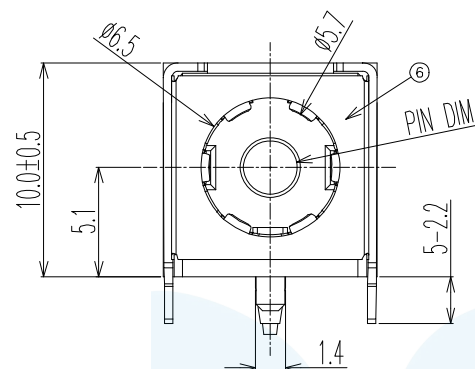

NOTES

VOLTAGE RATING:20V DC (R.M.S)

CURRENT RATING:10A





CONTACT RESISTANCE:30mΩ MAX.

INSULATION RESISTANCE:100 MΩ MIN.

DIELECTRIC WITHSTAND VOLTAGE:500V AC (R.A.M)

TEMPERATURE RANGE: -25°C TO +85°C

MATERIALS & PLATING: SEE THE TABLE BELOW.

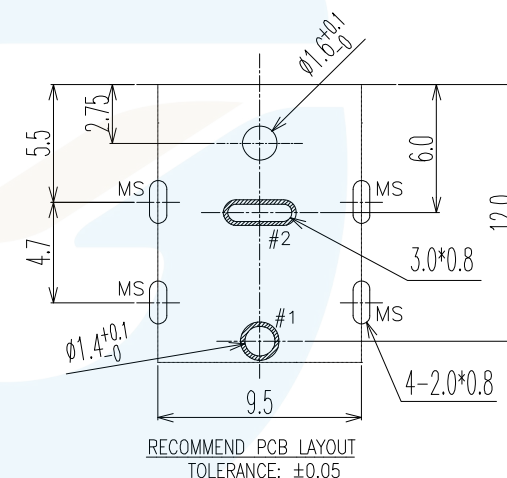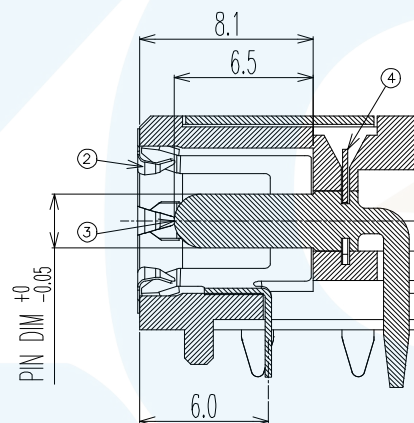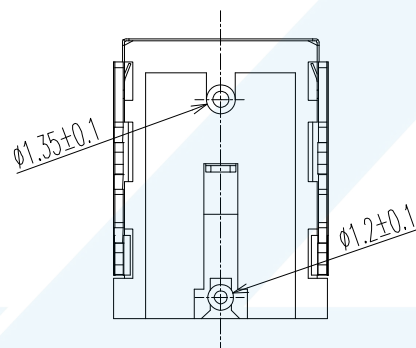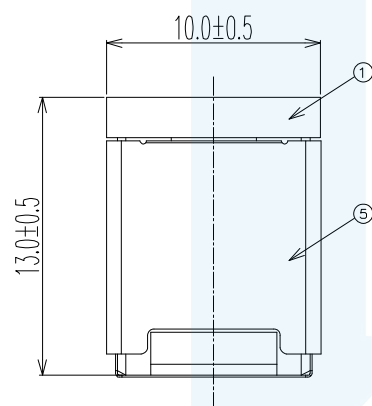

SECTION A-A



SCHEMATIC

PIN DIM	ø2.0	ø2.5	包装方式
P/N	ZB30030-04DBAP-A	ZB30030-04DBAP-B	编带装
	ZB30030-04DBAP-A0	ZB30030-04DBAP-B0	吸塑装

⑥	GROUND	1	STAINLESS STEEL;
⑤	SHELL	1	STAINLESS STEEL; Ni PLATING
④	TERMINAL	1	STAINLESS STEEL;
③	PIN	1	BRASS; Au or Sn PLATING
②	SORING	1	COPPER ALLOY; Cu PLAIN
①	HOUSING	1	PA9T; BLACK
ITEM	NAME	Q'TY	DESCRIPTION



LZG INDUSTRIAL CO. LTD

PART NAME	DC POWER JACK	TOLERANCE UNLESS 0.0±0.3 0.00±0.2	0.1±2° 0.0°±1°	UNIT: mm		APPROVAL:	汤建宝	DATE:	2023.06.19	DWG. NO.	
PART NO.	ZB30030-04DBAP-x	OTHERWISE SPECIFIED: 0.00±0.1	0.00°±0.5°			DRAWING NO.	ZB30030-04DBAP-x			SHEET	1/1