


[Home](#) | [Site Map](#) | [Japanese](#) | [Our](#)
[News & Events](#)
[Products & Services](#)
[About Us](#)
[Contact Us](#)


Products & Services

- ✚ [Connectors](#)
- ✚ [Flexible Printed Boards](#)
- ✚ [IC Sockets](#)
 - ✚ [Test & Burn-in Sockets](#)
 - ✚ [Production IC Sockets](#)

SIP

- [IC26 Series](#)
- [IC30 Series](#)
- [IC140 Series](#)

DIP

- [IC26 Series](#)
- **IC30 Series**
- [IC38 Series](#)
- [IC83 Series](#)
- [IC140 Series](#)

PLCC

- [IC160 Series](#)

QFP

- [IC149 Series](#)

SOP

- [IC179 Series](#)

SSOP

- [IC306 Series](#)


- [Optical Components](#)
- [OEM & ODM](#)
- [Board Assembly](#)

[Important!](#)
[Catalog](#)

[Contact Us about Products & Services](#)

[News on Our Products & Services](#)

IC30 Series (DIP)

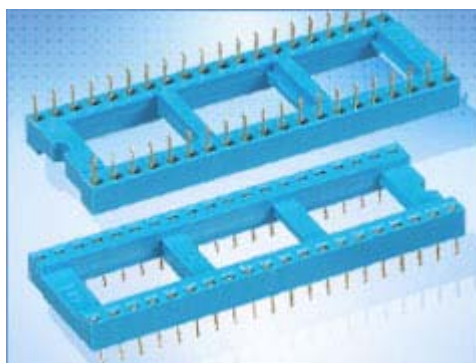

DIP

2.54mm pitch

Features

- Two contact-springs ensuring high contact reliability
- End-to-end and/or side-to-side stackable with 2.54mm pitch
- RoHS compliant

Specifications

Performance

Insulation Resistance 1,000MΩ min. @ 500VDC

Withstanding Voltage 700VAC rms / minute

Contact Resistance 20mΩ max. @ 10mA

Current Rating 1A

Operating Temperature -65°C to +85°C

Materials

[Exposition Schedule](#)[Press Releases](#)

Insulator

PBT glass-filled, UL94V-0

Contact

Copper Alloy, Gold plating

Ordering Code

IC30 - **14** **0** **3** - **G** **4**
1 # 2 # 3 # 4 # 5

1 IC30 Series

2 Number of contacts

3 Row space of IC-leads - 3: 0.3 inches

4 Plating of contact - G: Gold

5 Type of solder terminal - 4: Straight solder dip

Series Lineup

Part Number	No. of Contacts
IC30-0803-G4	
IC30-1003-G4	
IC30-1403-G4	
IC30-1603-G4	
IC30-1803-G4	
IC30-2003-G4	
IC30-2004-G4	
IC30-2203-G4	
IC30-2204-G4	
IC30-2403-G4	
IC30-2406-G4	
IC30-2803-G4	
IC30-2806-G4	
IC30-3206-G4	
IC30-3606-G4	
IC30-4006-G4	
IC30-4206-G4	
IC30-6409-G4	



Copyright (c) 2006 Yamaichi Electronics Co., Ltd. All rights reserved.

[Terms of Use](#)

[Site Map](#)