




Features

- For AF input stages and driver applications
- High current gain
- Low collector-emitter saturation voltage

MARKING

TYPYR	MARKING	TYPYR	MARKING
BC846A	1A	BC848C	1L
BC846B	1B	BC849A	2A
BC846C	1C	BC849B	2B
BC847A	1E	BC849C	2C
BC847B	1F	BC850A	2E
BC847C	1G	BC850B	2F
BC848A	1J	BC850C	2G
BC848B	1K		



SOT-23		
Dim	Min	Max
A	0.37	0.51
B	1.20	1.40
C	2.30	2.50
D	0.89	1.03
E	0.45	0.60
G	1.78	2.05
H	2.80	3.00
J	0.013	0.10
K	0.903	1.10
L	0.45	0.61
M	0.085	0.180
α	0°	8°
All Dimensions in mm		







Maximum Ratings @ $T_A = 25^\circ\text{C}$ unless otherwise specified

Parameter	Symbol	Value	Units
Collector Base Voltage	BC846 V_{CBO}	80	V
	BC847, BC850 V_{CBO}	50	V
	BC848, BC849 V_{CBO}	30	V
Collector Emitter Voltage	BC846 V_{CEO}	65	V
	BC847, BC850 V_{CEO}	45	V
	BC848, BC849 V_{CEO}	30	V
Emitter Base Voltage	BC846, BC847 V_{EBO}	6	V
	BC848, BC849, BC850 V_{EBO}	5	V
Collector Current	I_C	100	mA
Peak Collector Current	I_{CM}	200	mA
Power Dissipation	P_{tot}	300	mW
Junction Temperature	T_J	150	°C
Storage Temperature Range	T_S	- 55 to + 150	°C

Electrical Characteristics @ $T_A = 25^\circ\text{C}$ unless otherwise specified

Parameter		Symbol	Min.	Typ.	Max.	Units
Collector-base breakdown voltage at I _C = 10 μA, I _E = 0	BC846 BC847/850 BC848/849	V _{(BR)CBO}	80 50 30	- - -	- - -	V V V
Collector-emitter breakdown voltage at I _C = 10 mA, I _B = 0	BC846 BC847/850 BC848/849	V _{(BR)CEO}	65 45 30	- - -	- - -	V V V
Emitter-base breakdown voltage at I _E = 10μA, I _C = 0	BC846/847 BC848-850	V _{(BR)EBO}	6 5	- -	- -	V V
DC Current Gain at V _{CE} = 5 V, I _C = 2 mA	A B C	h _{FE} h _{FE} h _{FE}	110 200 420	- - -	220 450 800	- - -
Collector Emitter Saturation Voltage at I _C = 10 mA, I _B = 0.5 mA		V _{CEsat}	-	-	250	mV
at I _C = 100 mA, I _B = 5 mA		V _{CEsat}	-	-	600	mV
Base-emitter saturation voltage at I _C = 10 mA, I _B = 0.5 mA		V _{BEsat}	-	700	850	mV
at I _C = 100 mA, I _B = 5 mA		V _{BEsat}	-	900	1100	mV
Base Emitter On Voltage at I _C = 2 mA, V _{CE} = 5 V		V _{BE(on)}	580	-	700	mV
at I _C = 10 mA, V _{CE} = 5 V		V _{BE(on)}	-	-	770	mV
Collector Cutoff Current at V _{CB} = 30 V		I _{CBO}	-	-	15	nA
Current Gain Bandwidth Product at V _{CE} = 5 V, I _C = 10 mA, f = 100 MHz		f _T	-	300	-	MHz
Output Capacitance at V _{CB} = 10 V, f = 1 MHz		C _{ob}	-	-	6	pF
Input Capacitance at V _{EB} = 0.5 V, f = 1 MHz		C _{ib}	-	9	-	pF
Noise Figure at I _C = 200 μA, V _{CE} = 5 V	BC846, BC847, BC848	NF	-	-	10	dB
R _G = 2 KΩ, f = 1 KHz	BC849, BC850	NF	-	-	4	dB
at I _C = 200 μA, V _{CE} = 5 V,	BC849	NF	-	-	4	dB
R _G = 2 KΩ, f = 30 ~15 KHz	BC850	NF	-	-	3	dB

TYPICAL TRANSIENT CHARACTERISTICS

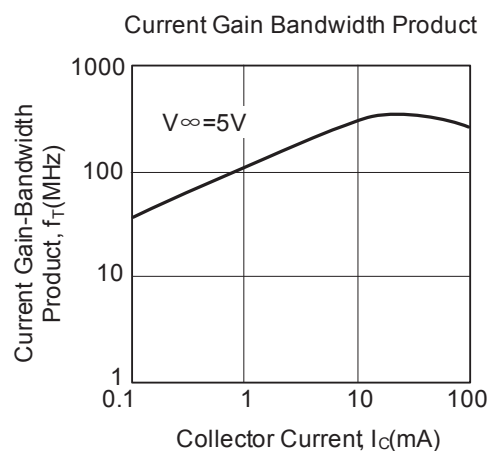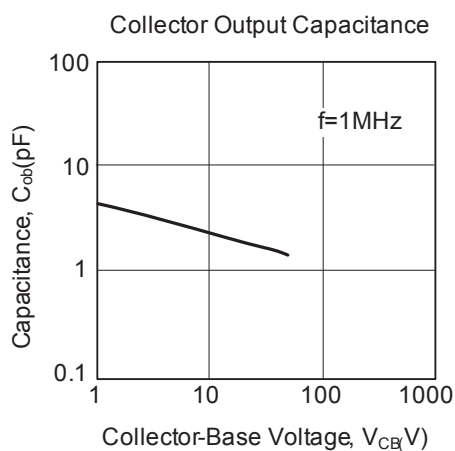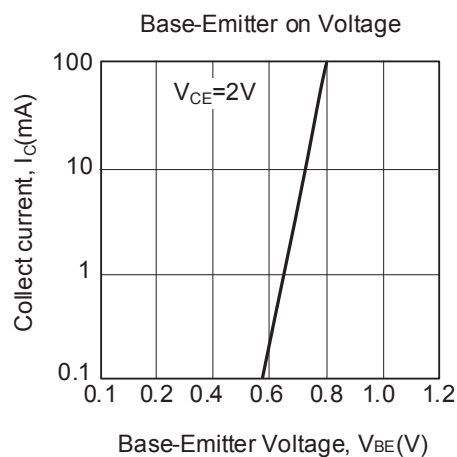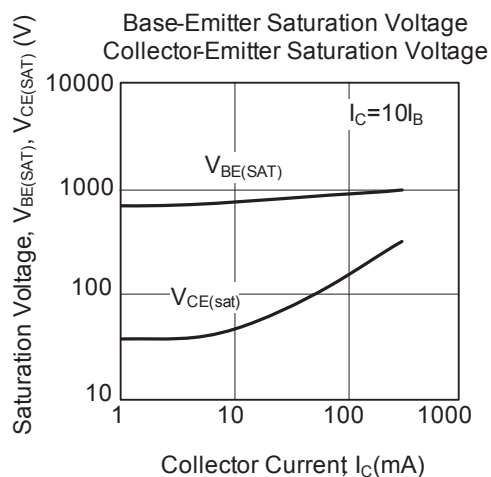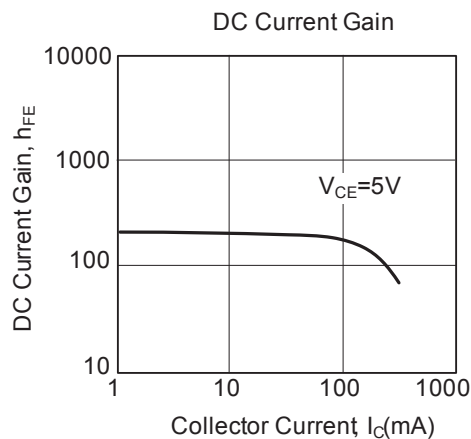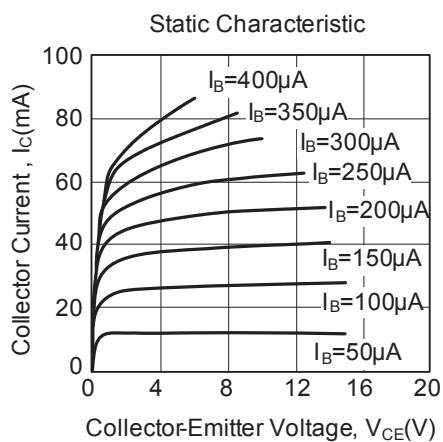

IMPORTANT NOTICE

HC-SEMI reserves the right to make changes without further notice to any products herein.

HC-SEMI makes no warranty, representation or guarantee regarding

The suitability of its products for any particular purpose, nor does HC-SEMI assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation consequential or incidental damages.

“Typical” parameters can and do vary in different applications. All operating parameters, including “Typicals” must be validated for each customer application by customer’s technical experts.

HC-SEMI products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the HC-SEMI product could create a situation where personal injury or death may occur.

Should Buyer purchase or use HC-SEMI products for any such unintended or unauthorized application, Buyer shall indemnify and hold HC-SEMI and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that HC-SEMI was negligent regarding the design or manufacture of the part.