


REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A2	N/A		PIN	2024.12.10	
A3	N/A	A3 X2		2025.09.05	

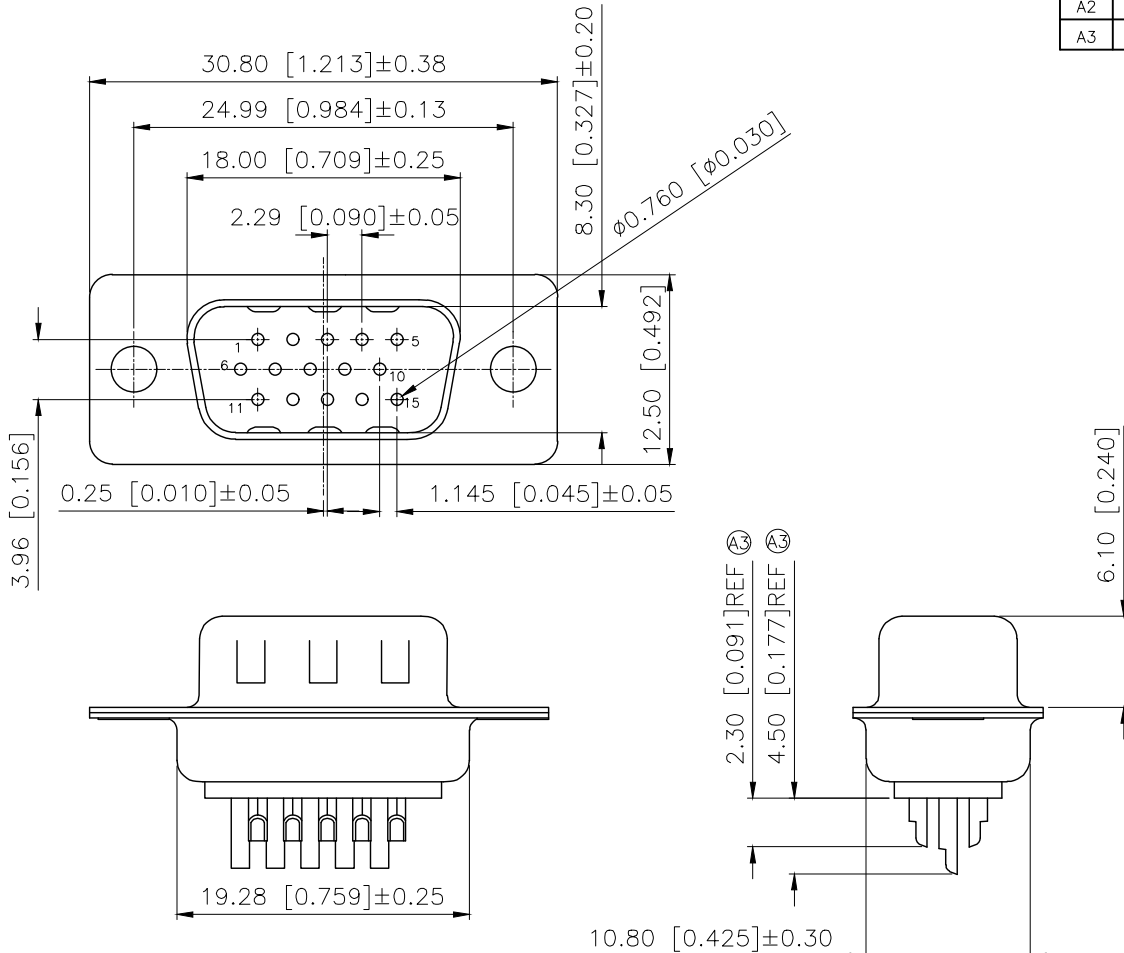


- Specifications:
- 1.Voltage rating:250V AC/DC
250V AC/DC
 - 2.Current rating:3A AC/DC
:3A AC/DC
 - 3.Withstanding voltage:500V AC/minute
:500V AC/
 - 4.Temperature range:-55 ~+105
:-55 ~+105
 - 5.Insulation resistance:≥ 1000MΩ
:≥ 1000MΩ
 - 6.Contact resistance:≤30mΩ
:≤30mΩ
 - 7.Rubber core:PBT UL94V-0
PBT UL94V-0
 - 8.The iron shell:SPCC-SD Nivkel Plating/Tin Plating/Gold Plating
SPCC-SD / /
 - 9.Terminal:Copper alloy

PART NO.:

X04 15 W C 2 W 1

Series No
Row No-Pin No 15Pin
Welding Board Angle:W-Male
T:Tradutional C:Car-pin
Planting Category:
1:1u 2:2u 3:3u 4:5u 5:15u 6:30u 7:AuSn
Color:B-Black W-White BL-Blue
1:TYPE-1; 2:TYPE-2; 3:TYPE-3; 4:TYPE-4

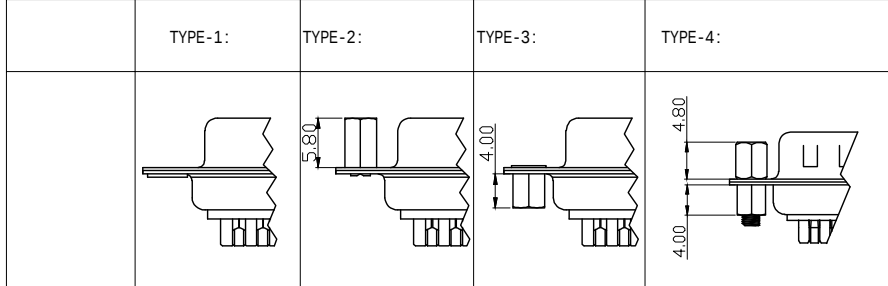

AuGLAR	±5°		DESIGN	VIEW:	MODEL TYPE: D-SUB			
X.	±0.40		CHECKED	UNIT: mm/in	PART NO.: X0415WC2W1			
X.x	±0.30		APPROVED	SIZE: A4	DWG NO.:			
X.xx	±0.20							
X.xxx	±0.15							
UNSPECIFIED TOLERANCES						SCALE N/A	PAGE 1/1	REVISION A3
www.xk-dg.cn		XKB INDUSTRIAL PRECISION CO.,LIMITED						