

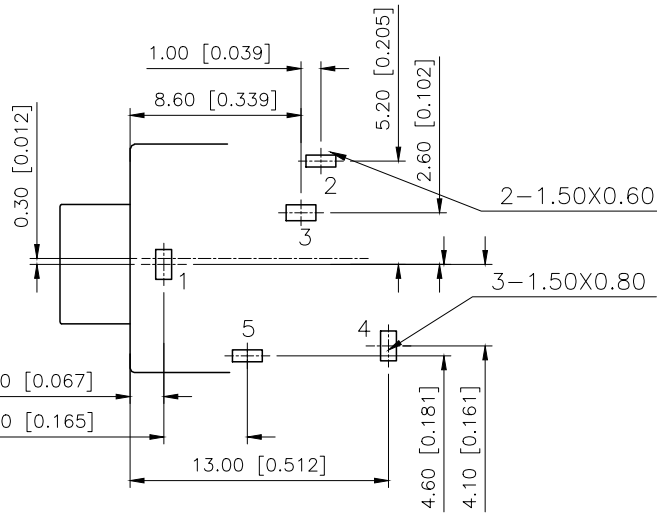
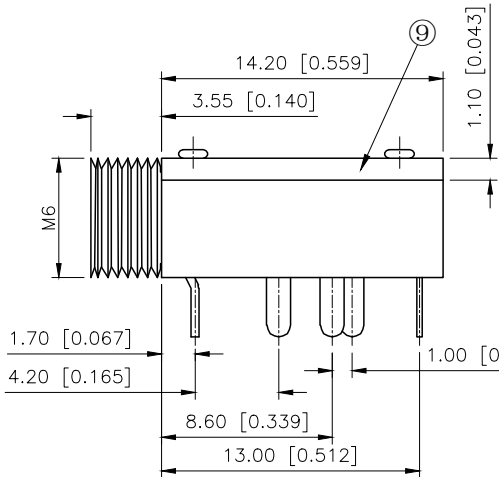


REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		参照实物修正图纸, 图面升级整理图面	2024.9.10	阿树

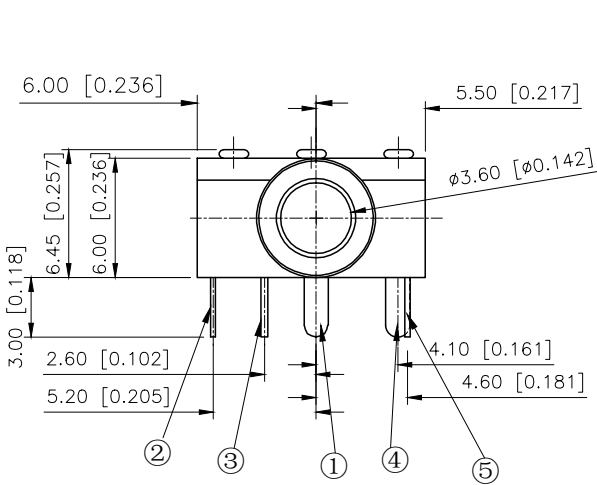

PCB LAYOUT TOP VIEW

SPECIFICATIONS:
Temperature range: $-30\sim+70^{\circ}\text{C}$
Rating: 30V 0.5A
Contact resistance: $\leq 30\text{m}\Omega$
Insulation resistance: $\geq 100\text{M}\Omega$ DC250V
Withstanding voltage: AC 500V (50Hz)/min
Plugging force: 3~20N
Life test: 5000 CYCLES

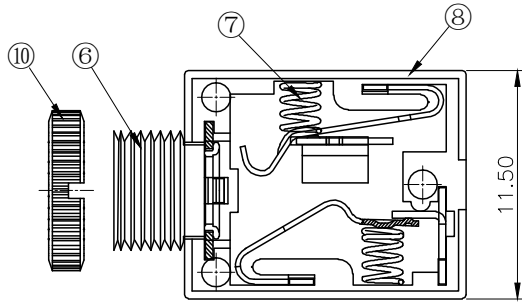

PJ-324M0	PJ-324M1	PJ-324M2	PJ-324M3

10	3.50 Nut	1	Zinc alloy		
9	Cover	1	Polycarbon	PC	Transparent
8	Pedestal	1	Nylon	PA66	Black
7	Spring	2	Carbon spring steel	D=0.30	D.Cu/Sn
6	Copper sleeve	1	Brass rods		D.Cu/Sn
5	5# Terminal	1	Phosphor copper	T=0.30	D.Cu/Sn
4	4# Terminal	1	Brass	T=0.35	D.Cu/Sn
3	3# Terminal	1	Brass	T=0.35	D.Cu/Sn
2	2# Terminal	1	Phosphor copper	T=0.25	D.Cu/Sn
1	1# Terminal	1	Brass	T=0.40	D.Cu/Sn
NO	PRART NAME	QTY	MATERIAL	SPECIFICATIONS	NOTE

AuGLAR	$\pm 5^{\circ}$
X.	± 0.40
X.x	± 0.30
X.xx	± 0.20
X.xxx	± 0.15
UNSPECIFIED TOLERAUCES	



DESIGN	阿树	VIEW:		MODEL TYPE:	3.5 PHONE JACK
CHECKED		UNIT:	mm/in	PART NO.:	PJ-324M0
APPROVED		SIZE:	A4	DWG NO.:	X-PJ-324M0