

You are here: [Products](#) » [Heatsinks f.cool](#) » [Profile heatsinks and fluid coolers](#) » [Standard extruded heatsinks](#) » [SK 470 ...](#) » **SK 470**



▼ **Heatsinks f.cool**

- ▼ Profile heatsinks and fluid coolers
 - **Standard extruded heatsinks**
 - Extruded heatsinks for lock-in retaining spring
 - Extruded heatsinks for PCB mounting
 - Extruded heatsinks for DC/DC converter
 - Retaining springs for transistors
 - U-Extruded heatsinks
 - Die-cast heatsinks
 - Fin coolers
 - Fluid coolers
 - Aluminium flat-, quadrangular-, angled-, U- and T-profiles
- ▶ Heatsinks and active heatsinks for processors
- ▶ Board Level heatsinks
- ▶ Cooling aggregates
- ▶ Accessories for electronic components
- ▶ **Cases f.case**
- ▶ **Connectors f.con**

Standard extruded heatsinks


SK 470 ...

SK 470 100 SA

11.8 x 8 mm, for pcb mounting SK 470 ... STS

[Data sheet](#)

[add to request](#)

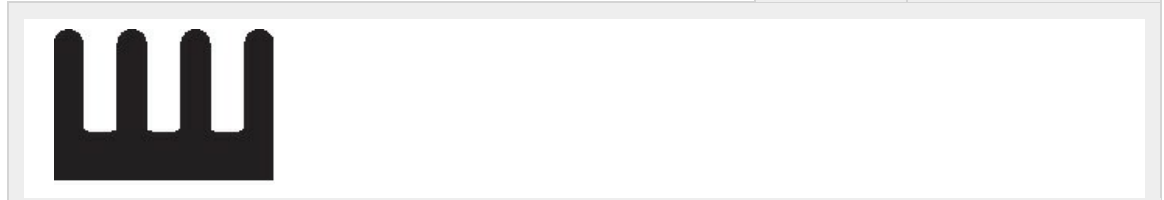

Features **Technical Drawing** Service Accessories / related products

thermal resistance R_{th}	28 - 17 K/W
drilling pattern	TO 220 SOT 32
surface	black anodised
height	8 mm
width B	11.8 mm
length	100 mm
plate thickness	2.5 mm

