

RoHS

REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	2024.09.22	

Specifications(规格):

1.Impedance(特性阻抗) : 50Ω;

2.Frequency (工作频率) : DC~6GHz;

3.VSWR(驻波比) :1.50:1@3GHz; 1.60:1@6GHz

4.Insulation resistance(绝缘阻抗) : ≥100MΩ;

5.Dielectric withstand voltage (介质耐电压) : 800V AC;

6.Mating cycles (耐久性) : ≥25 cycles;

7.Temperature range(使用温度): -40℃~+105℃;

8.Waterproof rating: IP67~IP69K;

PART NO.:


XS30LFS3-WXX4

SMB外径尺寸(φ):

L0: φ5.45mm

L1: φ6.0mm

L2: φ6.2mm

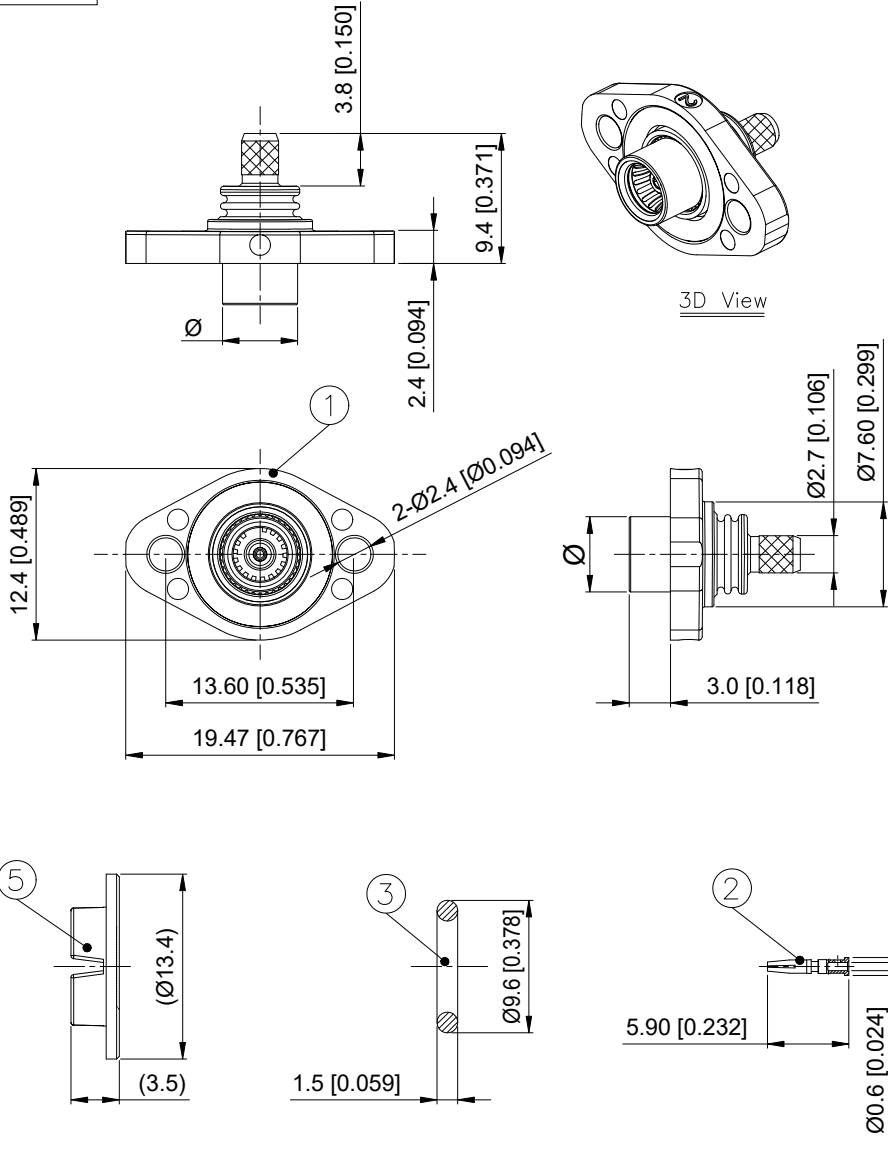

5	XSC0-PPNT01	Protective cover	PP		1 PC	
4	XSS3-BRN01	Crimp Sleeve	Copper Alloy	Ni PLATED	1 PC	
3	XSM0-RR01	Waterproof ring	Silicon rubber		1 PC	
2	XSTF3-BCG559	Center Conductor	Copper Alloy	Gold PLATED	1 PC	
1	XSBF3-ZA30XX	Outer Conductor	Zinc+Copper alloy	Tin+Ni PLATED	1 SET	
NO.	P/N	NAME	MATERIAL	FINISH (Contact)	Q' TY	Note

www.helloxkb.com www.helloxkb.cn www.xk-dg.cn

	DESIGN	希文	VIEW: 	MODEL TYPE: SMB Female Connector, H=3.0mm
	CHECKED		UNIT: mm/in	PART NO.: XS30LFS3-WXX4
	APPROVED		SIZE: A4	DWG NO.: X-XS30LFS3-WXX4
XKB INDUSTRIAL PRECISION CO.,LIMITED				SCALE: N/A PAGE: 1/1 REVISION: A0