
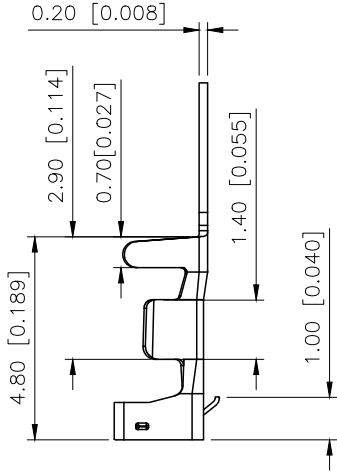


REVISIONS				
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE
A0	N/A		INITIAL RELEASE	/
A1	N/A		图面升级整理图面	2024.9.05





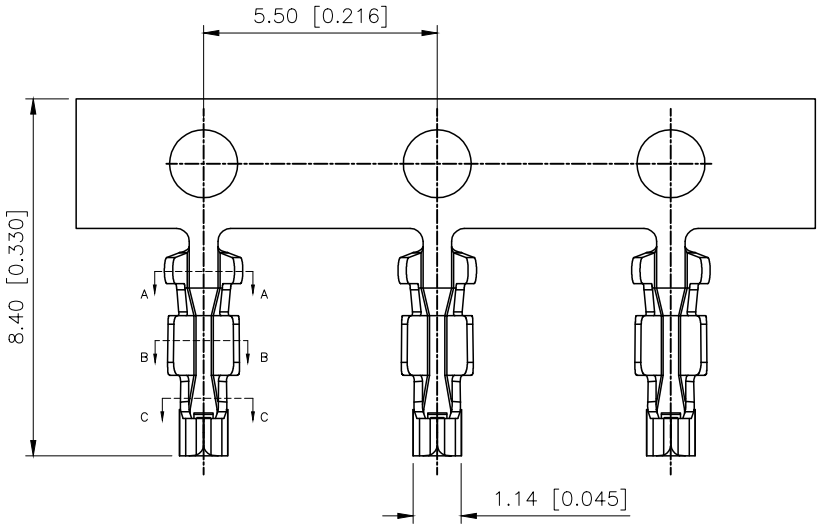


- SPECIFICATIONS
- Voltage rating:350V AC/DC
 - Current rating:3A AC/DC
 - Withstanding Voltage:500V AC/minute
 - Temperature range:-40°C~+125°C
 - Insulation resistance:≥1000MΩ
 - Contact resistance:≤10mΩ

PART NO.:

X1511 T-P-SN-A
① ② ③ ④ ⑤

- ①Series No
②Category:T-terminal
③Material:P-Phosphor bronze
④Plating style:SN-Bright tin plating
V01-Gold Flash
⑤Special No:Type A

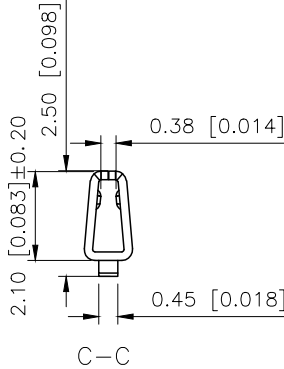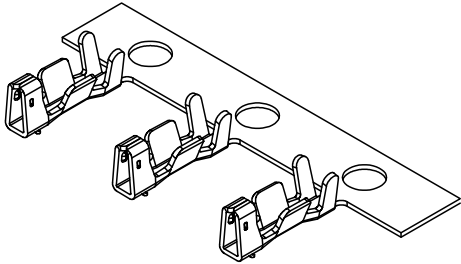

X1511T-PSN-A	Phosphor Bronze	AWG#28 0.D1.0mm	Tin	X1511H-A
X1511T-PV01-A			Gold Flash	
PART NO	Material	Wire Range	Plating	Suitable XKB Terminal

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERAUCES	



DESIGN	阿树
CHECKED	
APPROVED	

VIEW:	
UNIT:	mm/in
SIZE:	A4

MODEL TYPE:	1.50mm Crimp Style Connectors
PART NO.:	X1511T-PSN-A
DWG NO.:	