REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		独立各PIN数图纸，增加开孔定位尺寸	2024.12.10	阿树

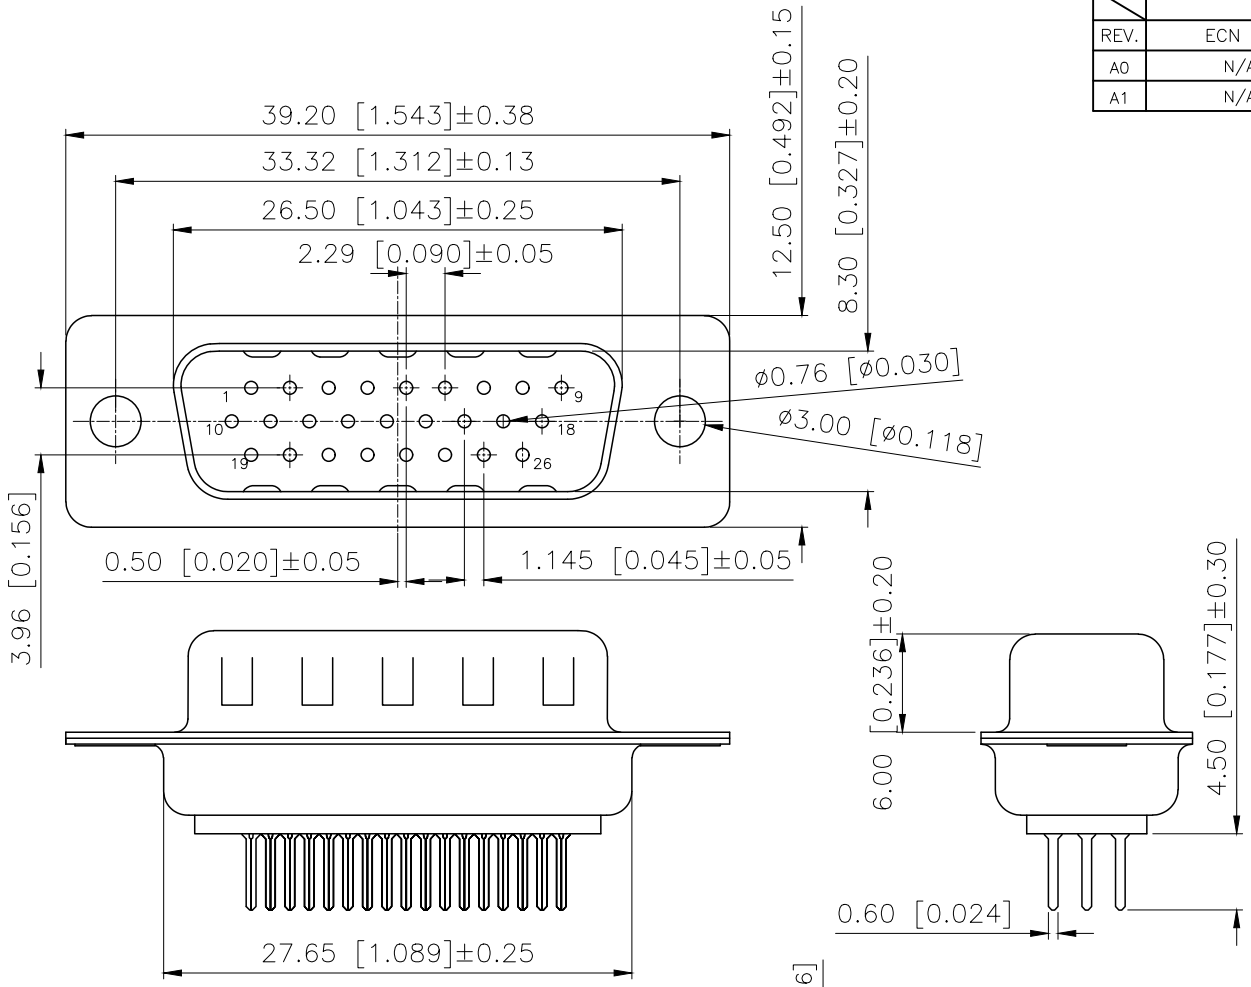

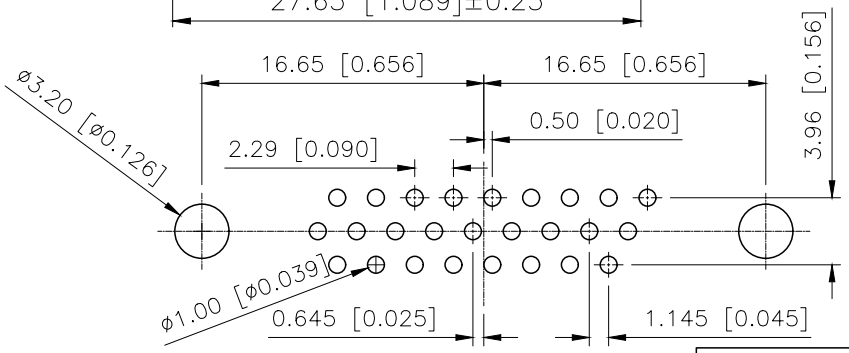

PCB LAYOUT

PART NO.:

X05 26 W T 7 W 1
① ② ③ ④ ⑤ ⑥ ⑦

①Series No
②Row No—Pin No：26Pin
③Welding Board Angle:W—Male
④T:Tradutional C:Car—pin
⑤Planting Categotry:
1:1u 2:2u 3:3u 4:5u 5:15u 6:30u 7:AuSn
⑥Color:B—Black W—White BL—Blue
⑦1:TYPE—1; 2:TYPE—2; 5:TYPE—5; 7:TYPE—7

Specifications:
规格：
1.Voltage rating:250VAC/DC
额定电压：250V AC/DC
2.Current rating:3A AC/DC
额定电流：3A AC/DC
3.Withstanding voltage:500V AC/minute
耐受电压：≥500V AC/分钟
4.Temperature range: —55℃—+105℃
温度范围：—55℃—+105℃
5.Insulation resistance:1000MΩMIN
绝缘电阻：≥1000MΩ
6.Contact resistance:30mΩMax
接触电阻：≥30mΩ
Materiai：
材料：
7.Rubber core:PBT UL94V—0
胶芯：PBT UL94V—0
8.The iron shell:SPCC Nivkel Plating/Tin Plating/Gold Plating
铁壳：SPCC,镀镍/镀锡/镀金
B、成品不能有弯针，R角不一致等不良。

铆合方式	TYPE—1:铆合	TYPE-2:前铆实心螺母	TYPE-7:后铆鱼叉	TYPE-5:铆鱼叉锁螺丝
图示	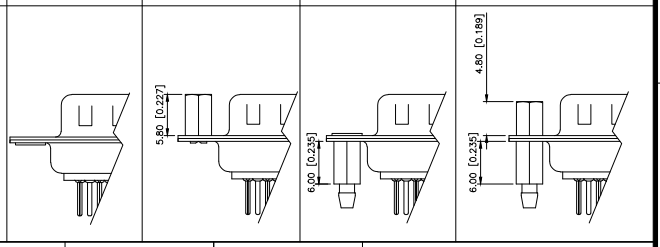			

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERAuCES	

XKB Connection 星创

DESIGN	阿树	VIEW:	MODEL TYPE: D—SUB
CHECKED		UNIT: mm/in	PART NO.: X0526WT7W1
APPROVED		SIZE: A4	DWG NO.: X—X0526WT7W1

XKB INDUSTRIAL PRECISION CO.,LIMITED

SCALE	PAGE	REVISION
N/A	1/1	A1