



Removable terminal 3-pole, push-in terminals up to maximal 2 x 1.5 mm<sup>2</sup>  
For SIRIUS devices in industrial standard mounting rail enclosure

|  |  |                   |       |         |
|--|--|-------------------|-------|---------|
| product brand name                           | SIRIUS   |                   |       |         |
| product category                             | Removable terminals  |                   |       |         |
| product designation                          | Terminal for control circuit/3-pole  |                   |       |         |
| design of the product                        | Spring-loaded terminal (push-in)/up to max. 2 x 1.5 mm <sup>2</sup>  |                   |       |         |
| <b>General technical data</b>                |  |                   |       |         |
| protection class IP                          | IP20   |                   |       |         |
| type of connectable conductor cross-sections | <ul style="list-style-type: none"> <li>• solid 1x (0.3 ... 1.5 mm<sup>2</sup>), 2x (0.3 ... 1.5 mm<sup>2</sup>)</li> <li>• finely stranded with core end processing 1x (0.5 ... 1.5 mm<sup>2</sup>), 2x (0.5 ... 1.5 mm<sup>2</sup>)</li> <li>• finely stranded without core end processing 1x (0.5 ... 1.5 mm<sup>2</sup>), 2x (0.5 ... 1.5 mm<sup>2</sup>)</li> <li>• at AWG cables solid 1x (22 ... 16), 2x (22 ... 16)</li> <li>• at AWG cables stranded 1x (20 ... 16), 2x (20 ... 16)</li> </ul> |                   |       |         |
| width  | 7.5 mm   |                   |       |         |
| General Product Approval                     | Declaration of Conformity  | Test Certificates | other | Railway |



[Miscellaneous](#)



[Type Test Certificates/Test Report](#)

[Confirmation](#)

[Confirmation](#)

**Further information**

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3ZY1131-2BA00>

Cax online generator

<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3ZY1131-2BA00>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)



<https://support.industry.siemens.com/cs/ww/en/ps/3ZY1131-2BA00>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

[http://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=3ZY1131-2BA00&lang=en](http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3ZY1131-2BA00&lang=en)

Characteristic: Derating

<https://support.industry.siemens.com/cs/ww/en/ps/3ZY1131-2BA00/manual>

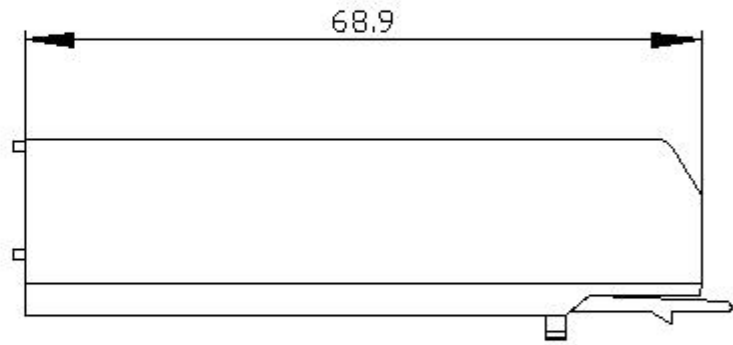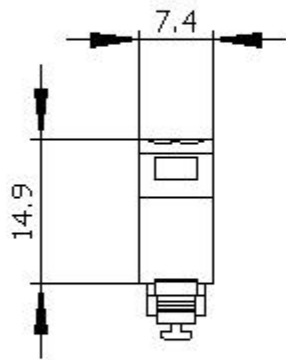

last modified:

12/20/2020 