




LEFT SIDE VIEW

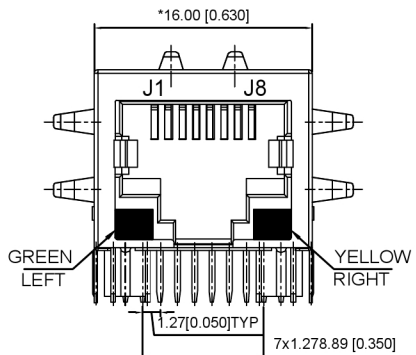


FRONT VIEW




BOTTOM VIEW

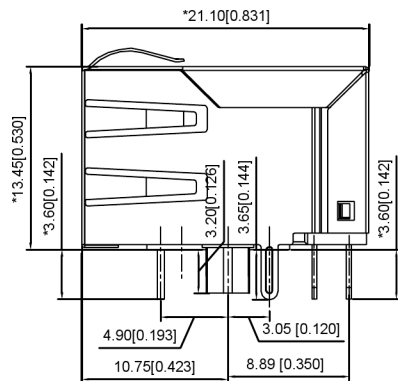


RIGHT SIDE VIEW

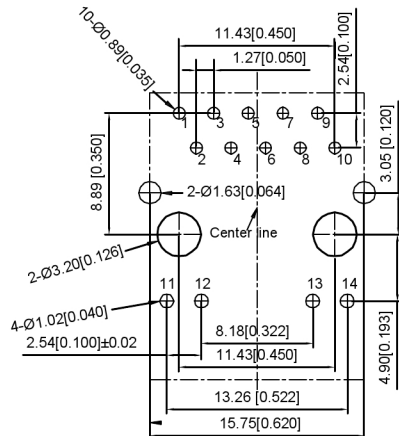

RECOMMENDED PCB LAYOUT
VIEWED FROM COMPONENT SIDE




TOP VIEW



BACK VIEW

Electrical 电气:

1. Turn ratio 匝数比: 2~3:J1~J2=1CT:1CT(±2%).
4~5:J3~J6=1CT:1CT(±2%)
6~7:J4~J5=1CT:1CT(±2%)
8~9:J7~J8=1CT:1CT(±2%)
2. OCL:350uH Min.at 100KHz 100mV 8mA DC.
3. Insertion Loss 插入损耗: -1.0 dB Max 1~100MHz.
4. Return loss 回程损耗: -20dB Min 1~10MHz
-16dB Min 10~30MHz
-12dB Min 30~60MHz
-10dB Min 60~80MHz
5. Cross talk 声道串扰: -40dB Min 1~30MHz;
-35dB Min 30~60MHz;
-30dB Min 60~100MHz;
6. CMR 共模抑制: -30dB Min 1~100MHz;
7. Hi-Pot 耐压测试: 2250V DC 6S 1mA PRI to SEC

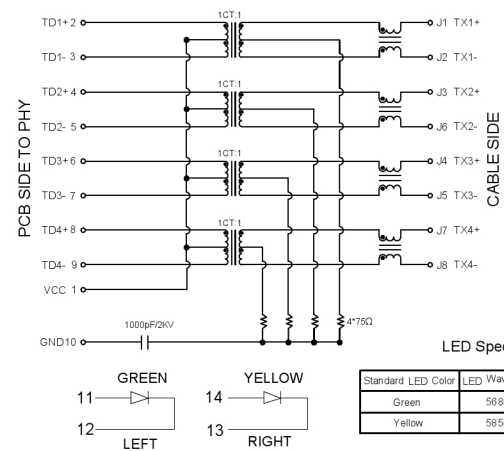

LED Specification

Standard LED Color	LED Wavelength	Foward(A)	Foward(V)
Green	568nm	20mA	1.85-2.45V
Yellow	585nm	20mA	1.7-2.2V

XKB Connectivity

MATERIAL 材料:

HOUSING 外壳: PBT,UL94V-0,BLACK. HF

TERMINALS BRACKET 端子支架: PBT,UL94V-0,BLACK. HF

SHIELD 保护物: C2680,T=0.20MM,NICKEL PLATING ON ALL AREA.

TERMINAL 端子: PHOSPHOR BRONZE C5210,T=0.35MM,
GOLD PLATING ON CONTACT AREA.

MECHANICAL 机械:

DURABILITY 耐用性: 750 CYCLES MIN.

MATING FORCE 配合力: 23N MAX.

OPERATING TEMPERATURE 工作温度: -40°C~+85°C.

STORAGE TEMPERATURE 储存温度: -40°C~+85°C.

ALL CRITICAL DIMENSIONS WITH "***"

DSND		SCALE: N/A	MODEL TYPE: RJ JACK	
DWN		VIEW: 	PART NO.:	
CHKD		UNIT: mm/in	DWG NO.:	
APPD		SIZE: A4	X01AQ106EA2AD	
PRECISION CO., LIMITED			WEIGHT	SHEET
				1/1
			REVISIOI	A0

XKLE

XKB INDUSTRIAL PRECISION CO., LIMITED