

IP68 防水接线器/ waterproof connector

KH-M685-AS-2P



2P



3P



4P



5P



NSW

**UK
CA**


CB

RoHS

产品参数/Technical data

型号 Model	KH-M685-AS-2P		
材料 Material	防火阻燃 Fire and flame retardant UL94V-2		
额定输出 Rated output	IEC/NSW:32A 450VAC ETL:18A 300VAC		
防护等级 IP code	IP68		
接线内芯 Terminal	2P/3P/4P/5P		
工作温度 Working	T105		
接线范围 Rated connecting capacity	欧规 European:0.5 ~ 4.0mm² 澳规 Australia:0.5 ~ 4.0mm² 美规 American: SJOW 12-14AWG		
密封胶塞/seal plug			
胶塞孔径/plug aperture	8mm	12mm	14mm
适用线径/Available cable diameter (橡胶圆线/Round rubber cable)	2*M25(4-8mm)	2*M25(8-12mm)	2*M25(10-14mm)
防水测试 Testing	20M 150hours		
参考剥线长度 Refer to stripping length	外剥线 External stripping 25mm 内剥线 Internal stripping 6mm		
产品尺寸 Product Size(参考实际尺寸图)	93.2*30mm (Refer to actual drawing)		
认证 Certification	ENEC,CE,UKCA,ETL,NSW,CB,ROHS		
产品应用/Application	水底/Underwater(淡水 fresh water) 地埋/Underground		
注/Mark: 1.不能使用在盐碱土壤/Do not use in saline soil 2.不能长期接触油性物质或浸泡在油污中/Do not contact oily substances or soak in oil for a longtime 3.不建议长期在日照暴晒下使用/Longtime exposed under sunshine is not recommended			

产品图纸/Product drawings

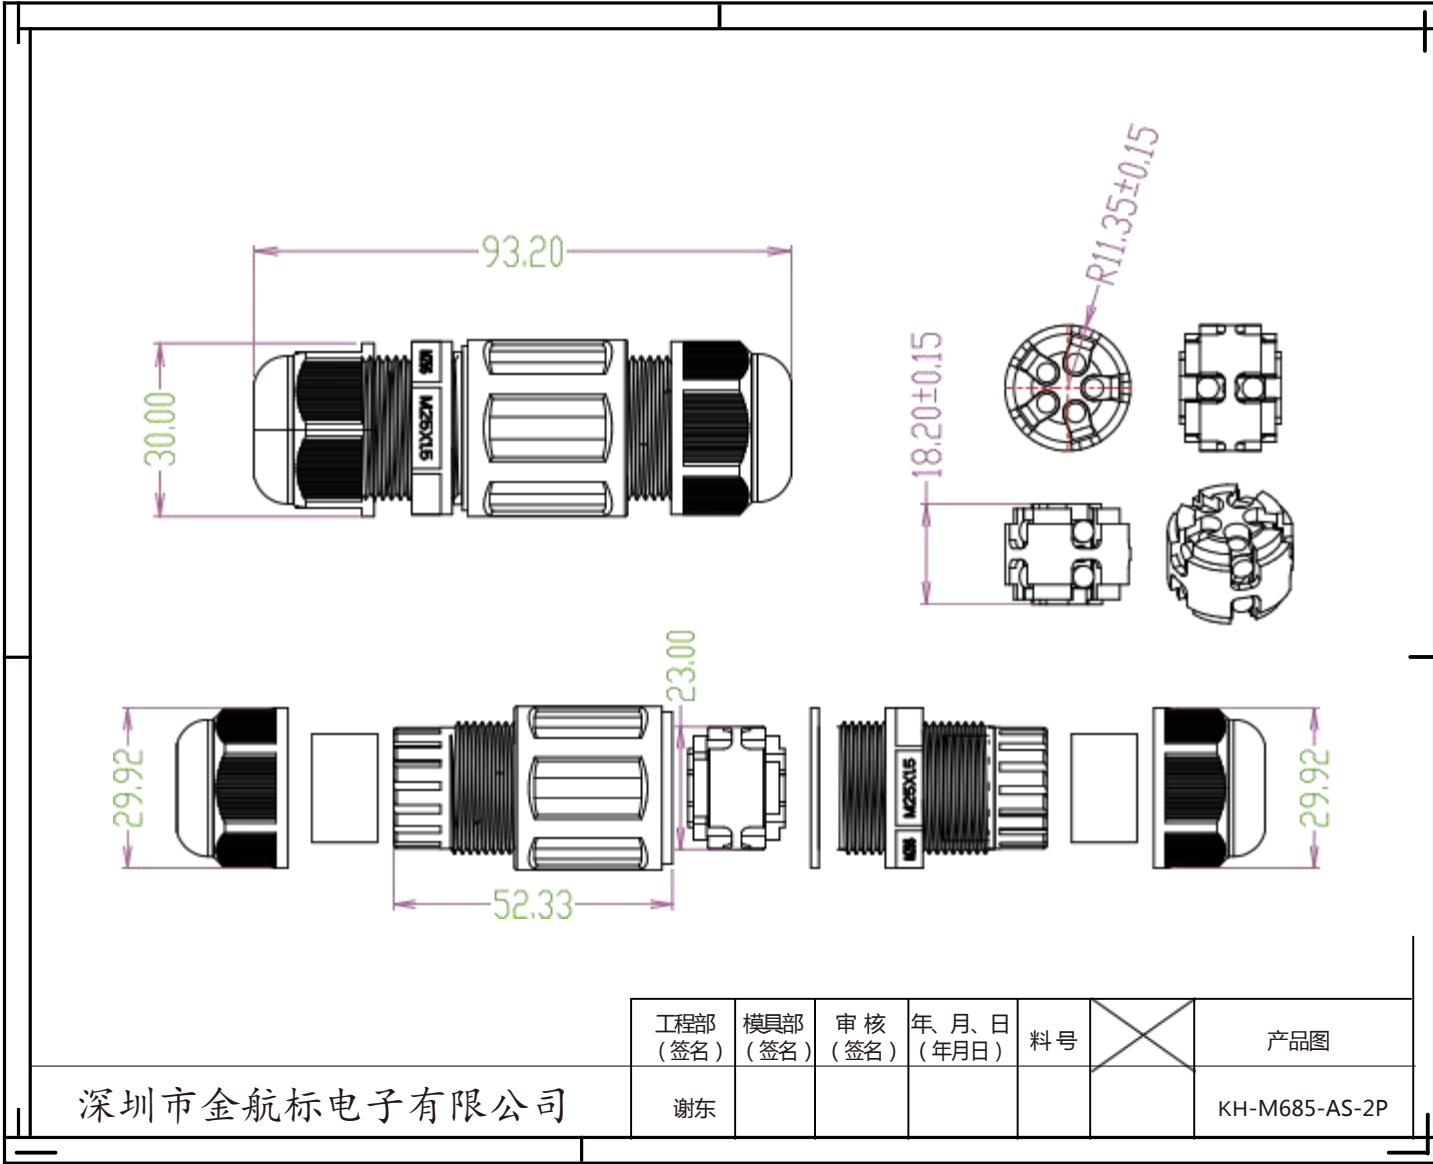

参考剥线长度
Refer to stripping length

