


HONEYWELL
PART NUMBER
BZ-2RQ1M-A2
PRODUCT CODE
ALG2100

REV	DOCUMENT	CHANGED BY	CHECK
6	0057857	LK 02NOV09	CMH

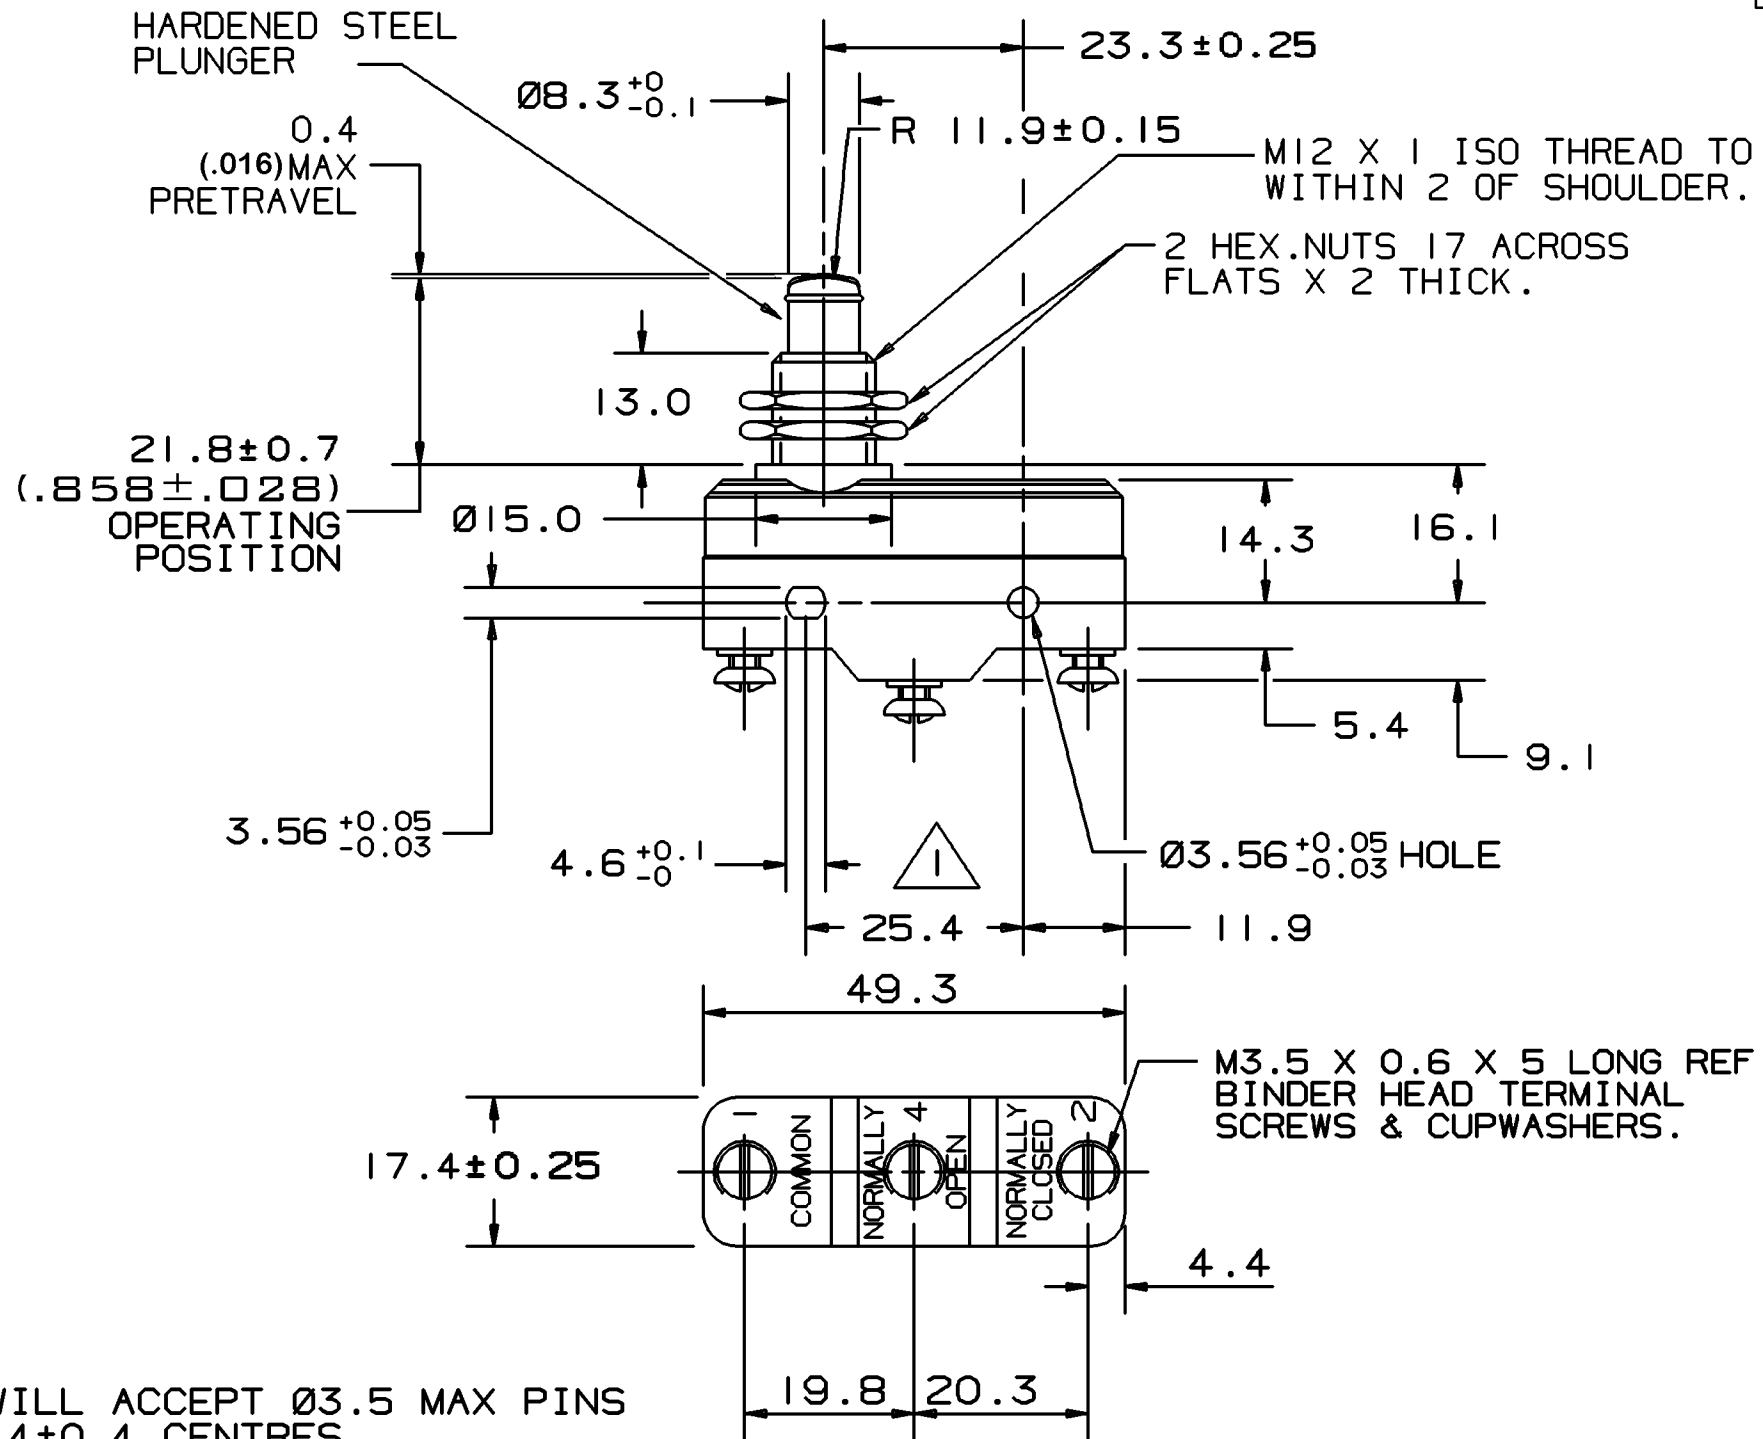

NOTES:-

- ▲ MOUNTING HOLES WILL ACCEPT $\varnothing 3.5$ MAX PINS OR SCREWS ON 25.4 ± 0.4 CENTRES.
- 2 MOUNTING NUTS SUPPLIED UNASSEMBLED.

RELEASE NO. : MS-11430

CHARACTERISTICS	ELECTRICAL DATA	
OPERATING FORCE-----	250 - 370g	CONTACT ARRANGEMENT
DIFFERENTIAL FORCE-----		BREAK DISTANCE
RELEASE FORCE-----	110g MIN	S. P. D. T.
PRE TRAVEL -----		L348
DIFFERENTIAL TRAVEL-----	0.01 - 0.05 (.0004 - .0020)	15A 125, 250 OR 480 VAC
OVERTRAVEL-----	5.6 / (.220) MIN	1/8 HP 125VAC, 1/4HP 250VAC
FREE POSITION-----		1/2A 125VDC, 1/4A 250 VDC
		16A/250 V~T85 5E4μ

DESIGN UNITS: MM
TOLERANCES UNLESS NOTED:

NO PLACES	X	±	-
ONE PLACE	.X	±	0.4
TWO PLACE	.XX	±	-
THREE PLACE	.XXX	±	-
ANGLES	X	±	-

THIRD ANGLE PROJECTION

DRAWN	JT	31JAN90
CHECK	-	-
THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.		
INTERPRET PER ASME Y14.5M-1994 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY		

Honeywell				
TITLE SWITCH-BASIC				
SIZE	TYPE	CAGE_CODE	DRAWING NAME	REV
A3	I	-	BZ-2RQ1M-A2	6
SCALE	NONE	SHEET		1 OF 1