

REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		图面升级整理图面	2024.9.18	阿树

A

A

B


B

C

C

D

D

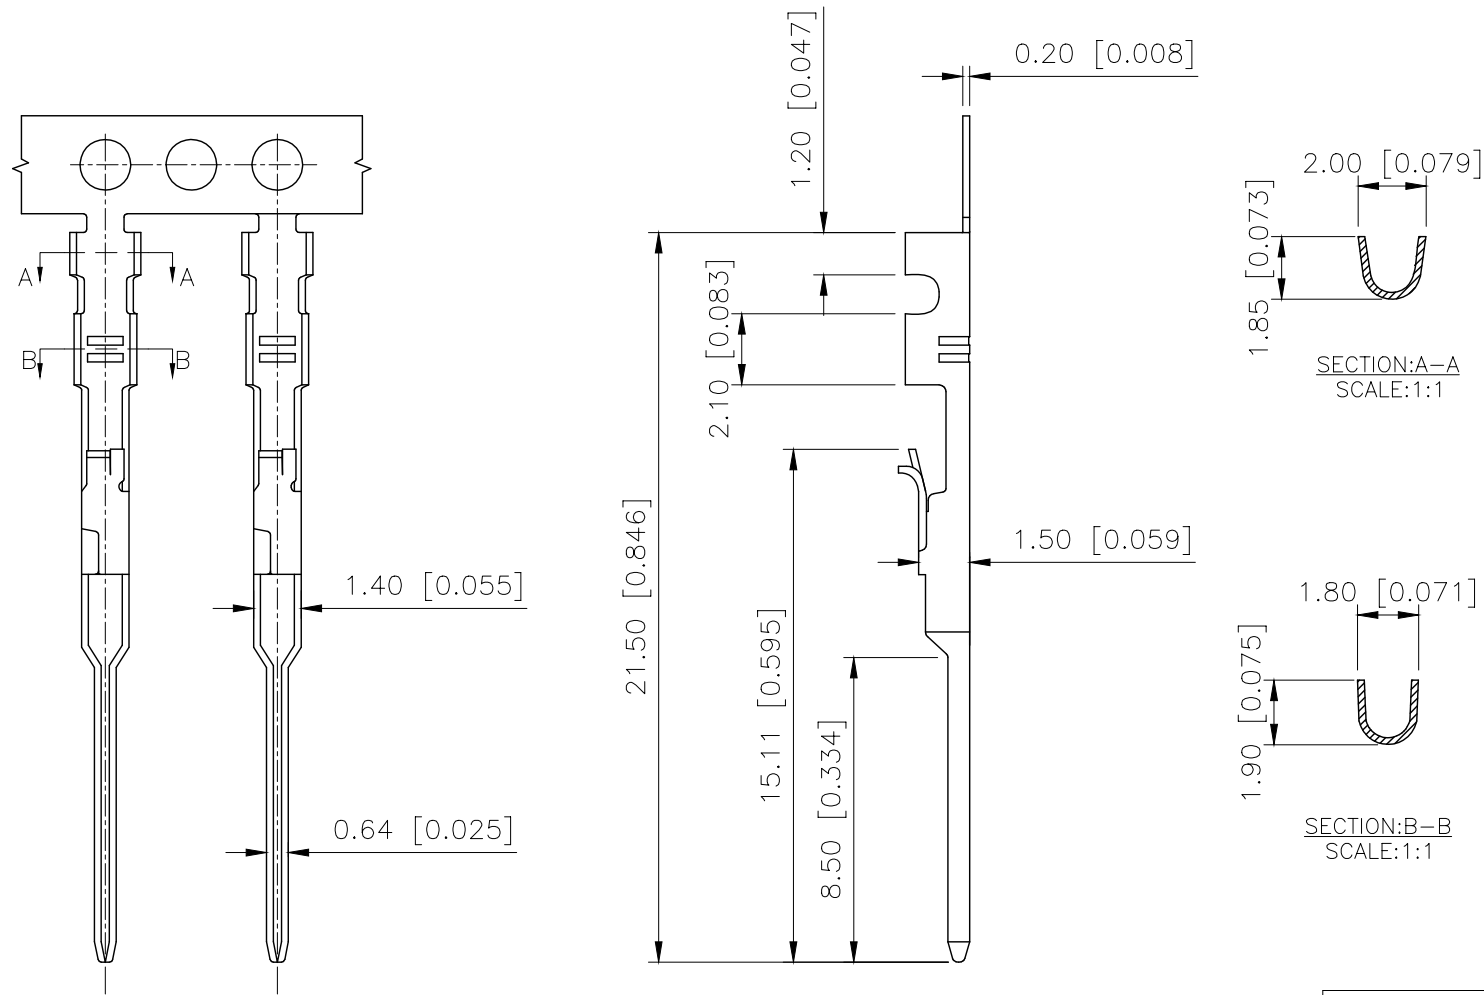

■ SPECIFICATIONS

- Voltage rating: 250V AC/DC
- Current rating: 3A AC/DC
- Withstanding Voltage: 1500V AC/minute
- Temperature range: -40°C ~ +125°C
- Insulation resistance: $\geq 1000M\Omega$
- Contact resistance: $\leq 20m\Omega$

PART NO.:
X9556 ① T ② M-B ③ SN ④ ⑤

- ① Series Number.
② Category: T-terminal
③ Welding Board Angle: M-Male
④ Material: B-Brass
P-Phosphor Bronze
⑤ Plating Category: SN-Bright Tin Plating

X9556TM-PSN	Phosphor Bronze	AWG#22~26	X9556H
X9556TM-BSN	Brass	AWG#22~26	X9556H
PART NO	Material	Wire Range	Suitable XKB Housing

AuGLAR	$\pm 5^\circ$
X.	± 0.40
X.x	± 0.30
X.xx	± 0.20
X.xxx	± 0.15
UNSPECIFIED TOLERANCES	



DESIGN	阿树	VIEW:		MODEL TYPE:	2.54mm Crimp Style Connector
CHECKED		UNIT:	mm/in	PART NO.:	X9556TM-BSN
APPROVED		SIZE:	A4	DWG NO.:	X-X9556TM-BSN