


REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		图面升级整理图面	2025.12.22	阿树

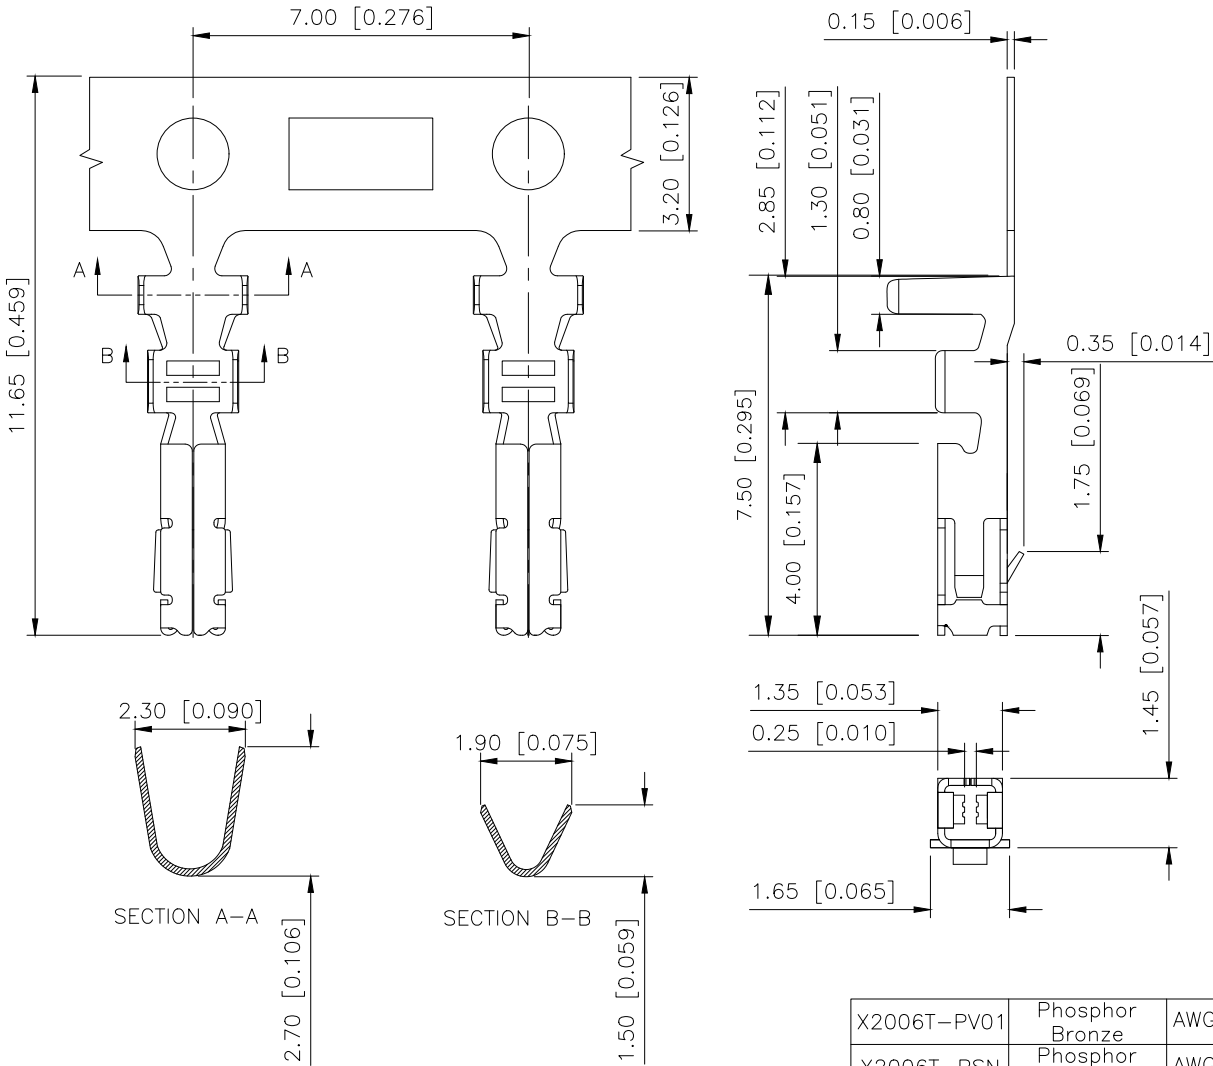

- SPECIFICATIONS
- Voltage rating:250VAC,DC
 - Current rating:3A,AC,DC
 - Withstanding Voltage:1500V AC/minute
 - Temperature range:-45°C+95°C
 - Contact resistance:20mΩ max

PART NO.:
X2006 T-P SN
① ② ③ ④

- ① XKB Series No
② Category:T-Terminal
③ Material:Phosphor bronze
④ Plating Gategory: SN-Bright Tin
Plating V01:All Gold Flash

X2006T-PV01	Phosphor Bronze	AWG#22~28	1.5mm (Max)	Gold Flash	X2006H
X2006T-PSN	Phosphor Bronze	AWG#22~28	1.5mm (Max)	Stamping Before Pating:30u"Ni MIN;70"Sn MIN	X2006H
PART NO	Material	Wire Range	Insulation O.D.	Finish	Suitable XKB Housing

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERAUCES	



DESIGN	阿树	VIEW:	MODEL TYPE: 2.0mm Crimp Style Housing
CHECKED		UNIT: mm/in	PART NO.: X2006T-PSN
APPROVED		SIZE: A4	DWG NO.: