



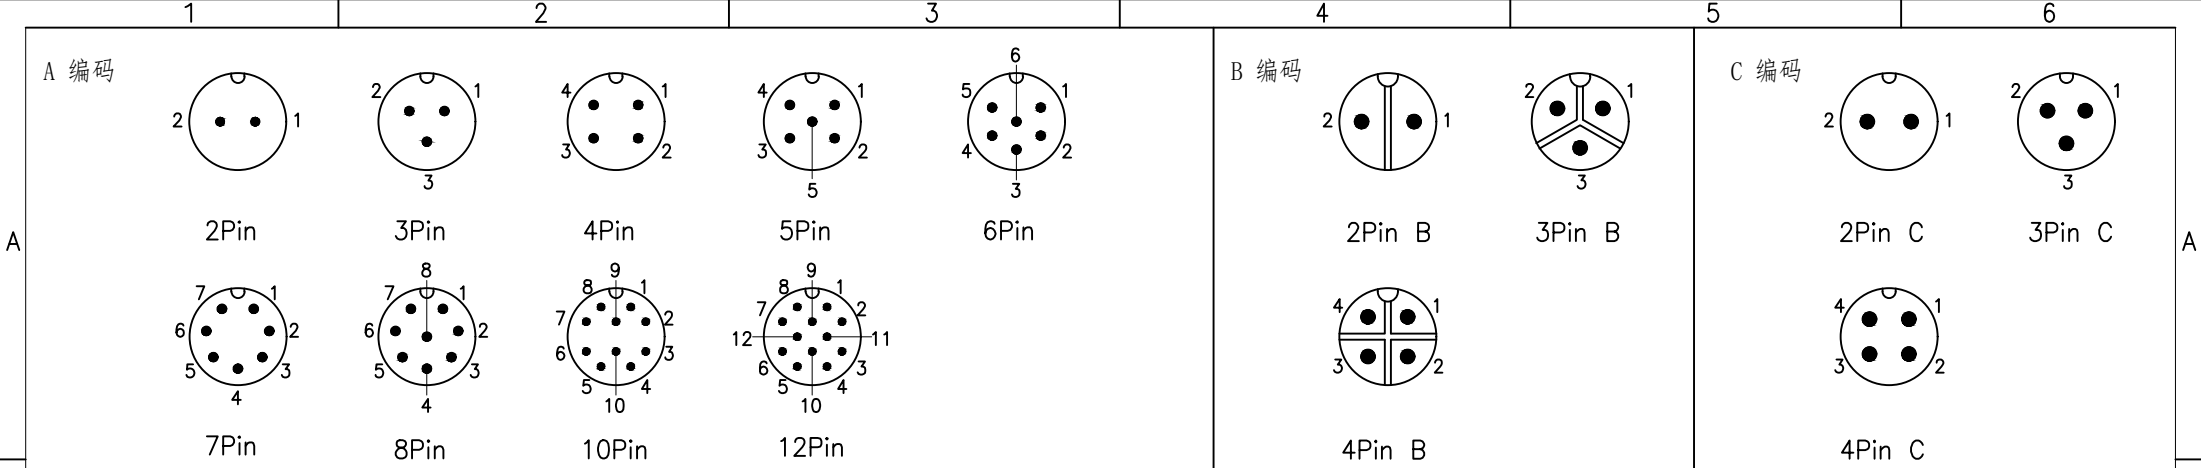

芯数	2P	3P	4P	5P	6P	7P	8P	10P	12P	2P B	3P B	4P B	2P C	3P C	4P C
额定电压	60V	60V	60V	60V	60V	60V	60V	30V	30V	300V	300V	300V	125V	125V	125V
额定电流	5A	5A	5A	5A	5A	5A	5A	2A	2A	10A	10A	10A	10A	10A	10A
防水等级	IP67/IP68														
使用温度	-45°C~105°C														

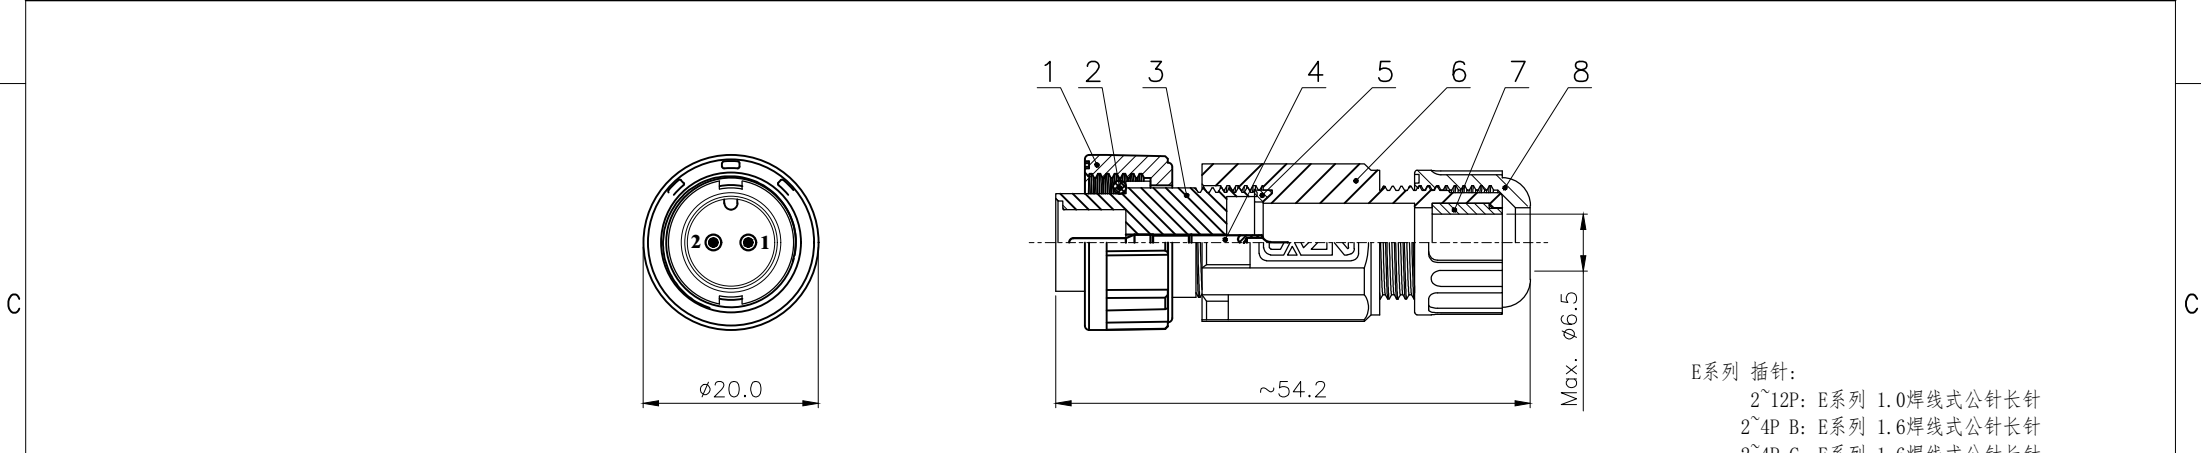

8	E10 紧锁螺帽	尼龙	/	pc	1
7	E10 组装式防水硅胶塞	硅胶	/	pc	1
6	E10 插头主体	尼龙	/	pc	1
5	E10 组装式主体防水垫片 $\Phi 12\times\Phi 9.3-2$	橡胶	/	pc	1
4	E系列 焊线式公针长针	黄铜	镀金	pc	1
3	E10 针型插头外壳	尼龙	/	pc	1
2	E10 插头胶芯O型防水圈 $\Phi 12\times\Phi 9\times 1.5$	橡胶	/	pc	2~12
1	E10 螺纹式连接螺帽	尼龙	/	pc	1
No.	Specification	Material	Treat	Unit	Q'ty

GENERAL TOLERANCE (UNLESS SPECIFIED)	DWN	DATE	
	L.L	2022.8.15	
	CHK	DATE	TITLE E10 螺纹式针型组装式插头
 THIRD ANGLE	APVD	DATE	
	UNIT MM	REV A	PART NO
	SIZE A4	SHEET 1 OF 1	DRAWING NO E10P-TA1-Px