


REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A			2025.10.11	

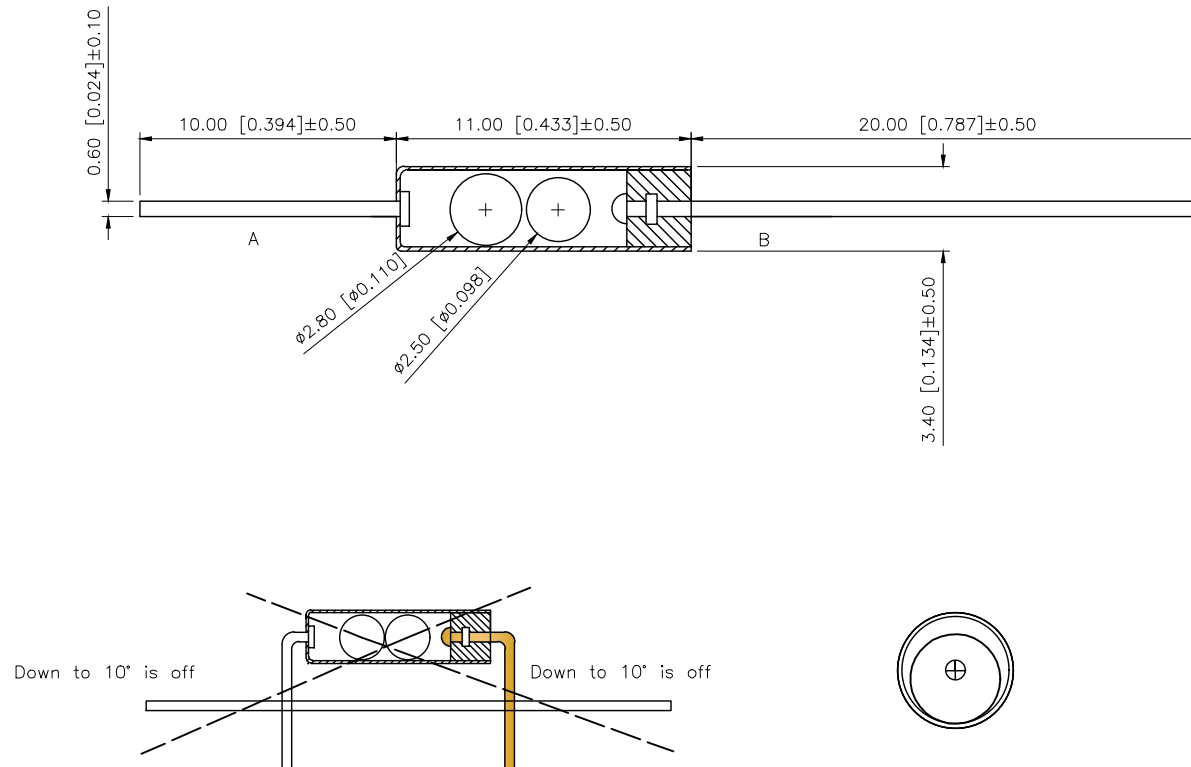

XKB Product features

1. Sw-200d is a dual ball single direction tilt inductive trigger switch.
- 1.SW-200D
2. When the guide end (no pin end) of the product is inclined and the inclination angle is greater than 10 degrees, the product is in open circuit, (off) state; when the product is horizontal and the inclination angle is greater than 10 degrees, the product is in closed circuit (on) state.XKB
2. 10
- OFF 10
- ON
3. When it is placed horizontally, shaking is easy to trigger, but when there is no foot down, shaking is not easy to trigger.XKB
- 3.
4. The product of this specification is completely sealed, waterproof and dustproof.
- 4.
5. Under normal conditions, the service life of the switch can reach 100000 times.
5. 10
6. This product is environmentally friendly.XKB
- 6.

Voltage: < 12V
Current: < 20mA
Conduction time: 2ms
Closed circuit resistance: < 10m ohm
Open circuit resistance: > 10m ohm
High temperature resistance: 120
Terminal tension: 500gf / min
Humidity: 25~95%RH
Working lifespan:100,000 cycles

	Heat shrinkable tube	1	PET	Grey
	rubber plug	1	PLC	
	Ball	1	2.8 Brass	Nickeling
	Ball	1	2.5 Brass	Silver plating
	PIN B	1	Brass	Tin
	PIN A	1	Brass	Gold plating
	Steel pipe	1		Nickeling
ITEM	PAPT NAMF	QTY	MATERIAL	FINISHING

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERANCES	



DESIGN		VIEW:	MODEL TYPE: Vibration switch
CHECKED		UNIT: mm/in	PART NO.: SW-200D-10T20G3
APPROVED		SIZE: A4	DWG NO.: