








REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		图面升级整理图面	2025.06.25	阿树

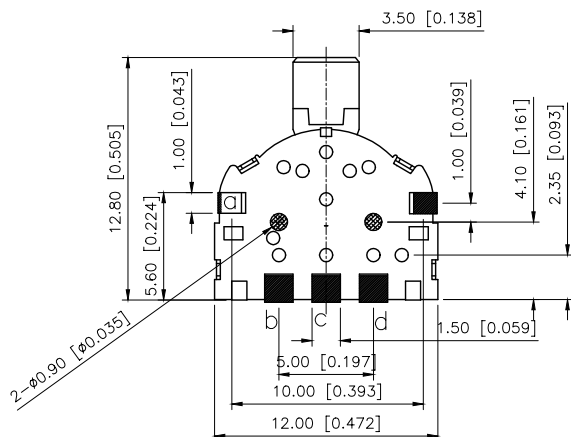

主要技术性能
Main technical performance
额定电负荷:DC12V 50mA
Rated electrical load: DC12V 50mA
绝缘电阻:≥100Ω
Insulation resistance: ≥ 100
耐压强度:AC250V50Hz/1min
Withstand voltage strength: ac250v50hz/1min
电气寿命:100000次
Electrical life: 100000 times
环境温度:-25℃~+70℃
Ambient temperature: -25c~+70c
相对湿度(40c)≤95%
Relative humidity (40C) ≤ 95%
接触电阻:≤100mΩ
Contact resistance: ≤ 100mq
动作力:两达拨力80+50gf
Action force: Liangda pulling force 80+50gf

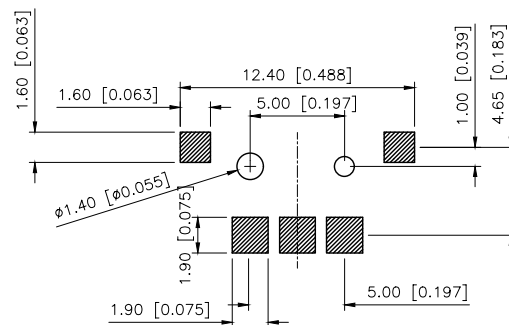

PCB LAYOUT

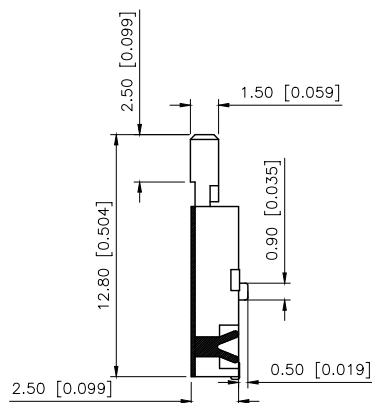

⑤	Contact	1	Phosphor Bronze	Plating silver
④	Base	1	Pa46	
③	Spring	1	Sus	
②	Cover	1	Sus	Ag
①	Keystake	1	Pa46	Black
ITEM	PAPT NAMF	QTY	MATERIAL	FINISHING

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERANCES	



DESIGN	阿树	VIEW:	MODEL TYPE: MULTI-FUNCTIONAL SWITCH
CHECKED		UNIT: mm/in	PART NO.: TM-2022-2
APPROVED		SIZE: A4	DWG NO.: X-TM-2022-2