

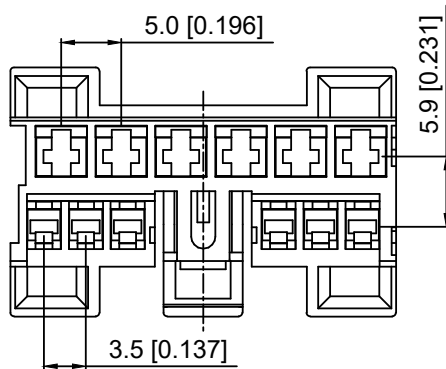
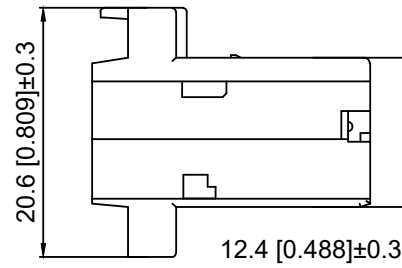
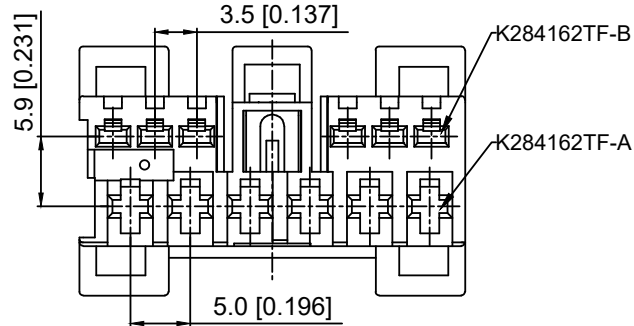



Current rating:3A AC/DC
 额定电流: 3A AC/DC
 Temperature range:-40℃-+125℃
 温度范围: -40℃-+125℃

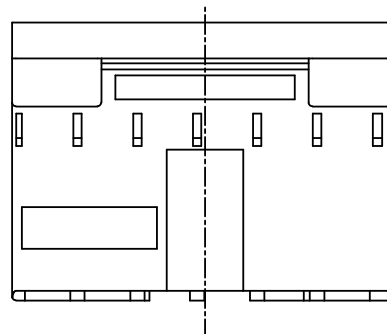

K 284162 H M - 12 - N0 G
 ① ② ③ ④ ⑤ ⑥ ⑦

- 1.K: XKBTEK-Car Connector
- 2.XKB Series No
- 3.Category:H-Housing
- 4.Category:M-Male Housing
- 5.Row No.Pin No:XX-12 Pin
- 6.Material:N0-PA66 UL94V-0
- 7.Color:W-White ; G-Green

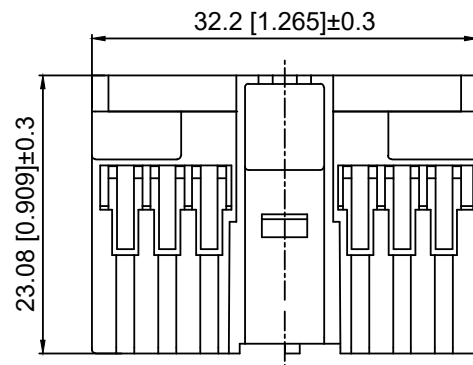

K284162HM-12-N0G	PA66	K284162HM	K284162HM	K284162TM-A/B	K284162H M	K284162H M
PART	Material	Suitable XKB Wafer	Suitable XKB Housing	Suitable XKB Terminal	Suitable XKB lid	Suitable XKB clip
	DSND		SCALE: N/A	MODEL TYPE: 5.0mmautomotive connector		
	DWN		VIEW:	PART NO.: K284162HM-12-N0G		
	CHKD		UNIT: mm/in	DWG NO.: X-K284162HM-12-N0G		
	APPD		SIZE: A4			
XKB INDUSTRIAL PRECISION CO.,LIMITED				WEIGHT	SHEET	REVISION
					1/1	A0

					ANGLAR	±5°
Δx					L≤ 4	±0.2
Δx					4<L≤ 16	±0.3
Δx					16<L≤ 63	±0.4
MARK	DESCRIPTION	DATE	REVISED	APPROVED	L> 63	±0.5
REVISIONS					UNSPECIFIED TOLERANCES	
www.helloxkb.com www.helloxkb.cn www.xk-dg.cn						

XKB