

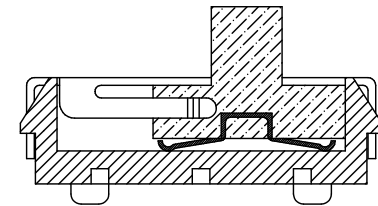
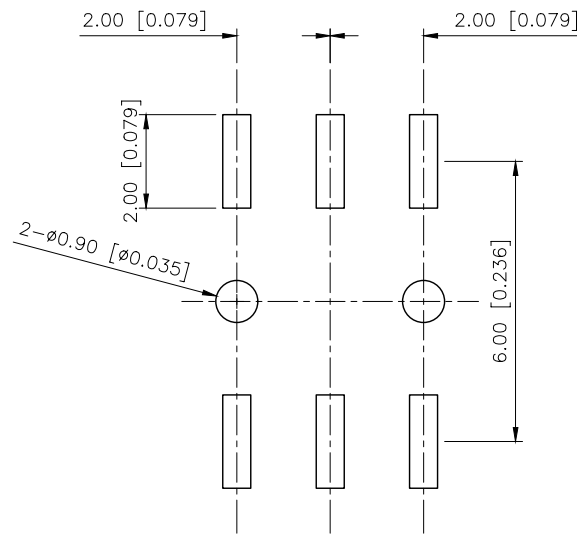
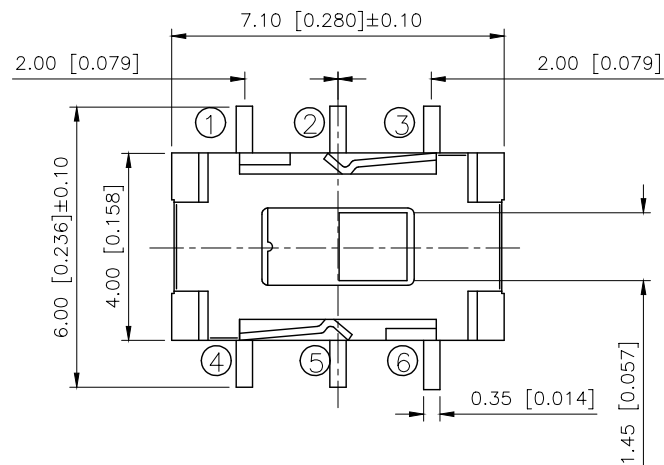


	REVISIONS				
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		图面升级整理图面	2025.06.21	阿树

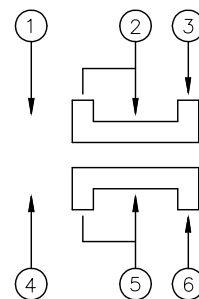

NOTE:
Rating:DC 12V 50mA Operating
Force:200±100gf
Lifetime:10 000 Cycles

PCB LAYOUT

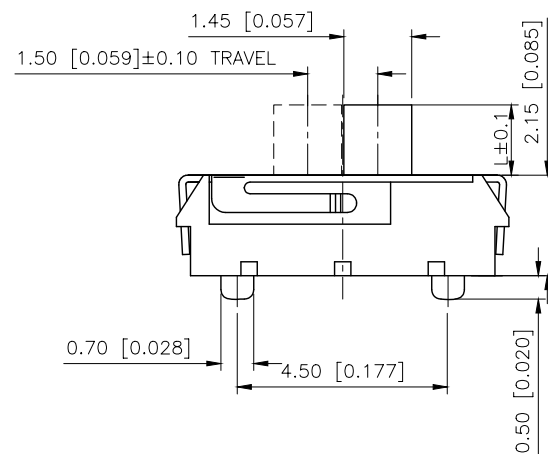

SCHEMATIC

PAPT NO	L
SS-3380S-L0	1.5
SS-3380S-L1	2.0
SS-3380S-L2	3.0
SS-3380S-L3	4.0

5	Terminal	6	Brass (0.30t)	Ag Plated
4	Contact spring	1	Phosphor branze	Ag Plated
3	Base	1	LCP	Black
2	Cover	1	Sus	Natural
1	Keystake	1	PA46	Black
ITEM	PAPT NAME	QTY	MATERIAL	FINISHING

AuGLAR	$\pm 5^\circ$
X.	± 0.40
X.x	± 0.30
X.xx	± 0.20
X.xxx	± 0.15
UNSPECIFIED TOLERANCES	

XK13 星城
Connection

XKB INDUSTRIAL PRECISION CO.,LIMITED

DESIGN	阿树	VIEW: 	MODEL TYPE: SLIDE SWITCH		
CHECKED		UNIT: mm/in	PART NO.: SS-3380S-L1		
APPROVED		SIZE: A4	DWG NO.: X-SS-3380S-L1		
PRECISION CO., LIMITED			SCALE	PAGE	REVISION
			N/A	1/1	A1

MODEL TYPE: SLIDE SWITCH			
PART NO.: SS-3380S-L1			
DWG NO.: X-SS-3380S-L1			
SCALE N/A	PAGE 1/1	REVISION A1	