


**160-3653 Solder Terminal, Turreted**

Recommended mounting hole .067 (1,70), #51 drill

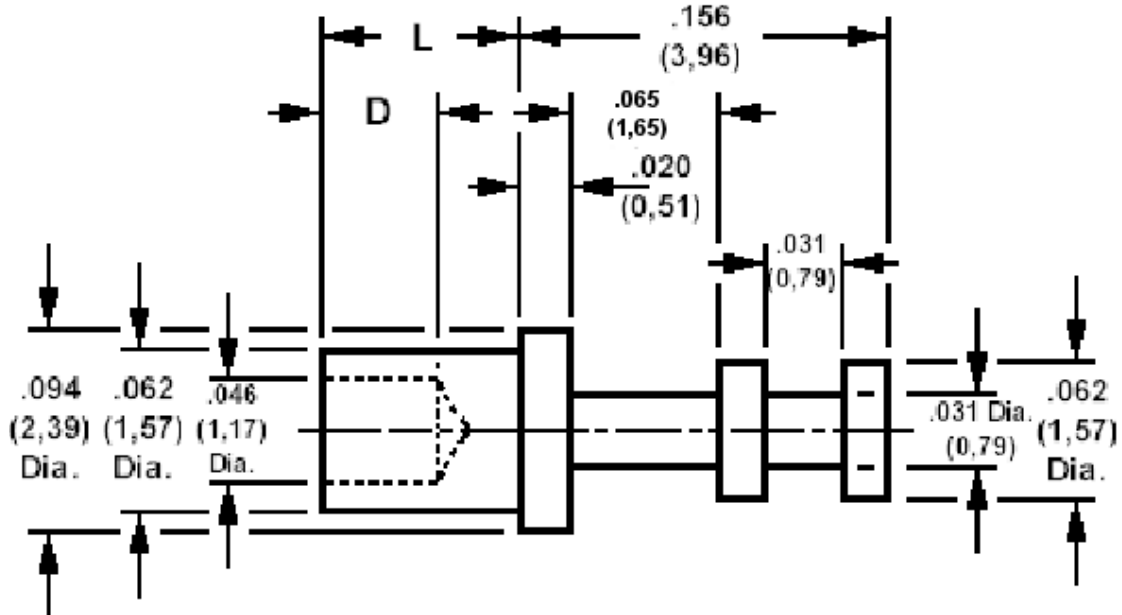

**How to order code**

**160-3653-XX-YY-00**

Basic Part No XX = L dimension, YY = Plating Finish

| DIMENSIONS (XX) |      |             |                 |             |
|-----------------|------|-------------|-----------------|-------------|
| Basic Part No   | (XX) | L           | Board Thickness | D           |
| 160-3653        | -11  | .037 (0,94) | .016 (0,41)     | .025 (0,64) |
|                 | -01  | .053 (1,35) | .031 (0,79)     | .045 (1,14) |
|                 | -02  | .084 (2,13) | .062 (1,57)     | .045 (1,14) |
|                 | -03  | .115 (2,92) | .094 (2,39)     | .045 (1,14) |
|                 | -04  | .147 (3,73) | .125 (3,18)     | .045 (1,14) |

| MATERIALS |          |             |      |                |
|-----------|----------|-------------|------|----------------|
| Component | Material | Finish (YY) |      |                |
|           |          | -01         | -03  | -05            |
| Terminal  | Brass    | Silver      | Gold | Electro Solder |

| SWAGE TOOLING               |                   |
|-----------------------------|-------------------|
| Recommended Swaging Tools:- |                   |
| Anvil                       | 435-6411-01-00-00 |
| Roll punch                  | 435-6611-01-00-00 |
| Flare punch                 | 435-6657-01-00-00 |